

P-Ch 30V Fast Switching MOSFETs

Features:

- ★ Green Device Available
- ★ Super Low Gate Charge
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

Description:

The KMK3107 is the high cell density trenched P-ch MOSFETs, which provides excellent $R_{DS(on)}$ and efficiency for most of the small power switching and load switch applications.

The KMK3107 meet the RoHS and Green Product requirement with full function reliability approved.

Product Summary


BVDSS	$R_{DS(on)}$	I_D
-30V	70m Ω	-3.9A

Absolute Maximum Ratings


Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-30	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D@T_A=25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ -10V ¹	-3.9	A
$I_D@T_A=70^\circ\text{C}$	Continuous Drain Current, V_{GS} @ -10V ¹	-3.1	A
I_{DM}	Pulsed Drain Current ²	-16	A
$P_D@T_A=25^\circ\text{C}$	Total Power Dissipation ³	1.5	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹	---	85	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	60	$^\circ\text{C/W}$

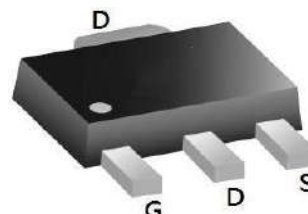

SOT89 Pin Configuration



Electrical Characteristics ($T_J=25\text{ }^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=-250\mu A$	-30	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BVDSS Temperature Coefficient	Reference to 25°C , $I_D=-1mA$	---	-0.02	---	V/ $^{\circ}\text{C}$
$R_{DS(ON)}$	Static Drain-Source On-Resistance ²	$V_{GS}=-10V$, $I_D=-3A$	---	55	70	$m\Omega$
		$V_{GS}=-4.5V$, $I_D=-1.5A$	---	90	120	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=-250\mu A$	-1.0	-1.5	-2.5	V
$\Delta V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	4.32	---	mV/ $^{\circ}\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-24V$, $V_{GS}=0V$, $T_J=25^{\circ}\text{C}$	---	---	-1	μA
		$V_{DS}=-24V$, $V_{GS}=0V$, $T_J=55^{\circ}\text{C}$	---	---	-5	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=-5V$, $I_D=-3A$	---	4.8	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1MHz$	---	24	48	Ω
Q_g	Total Gate Charge (-4.5V)	$V_{DS}=-20V$, $V_{GS}=-4.5V$, $I_D=-3A$	---	5.22	---	nC
Q_{gs}	Gate-Source Charge		---	1.25	---	
Q_{gd}	Gate-Drain Charge		---	2.3	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-15V$, $V_{GS}=-10V$, $R_G=3.3\Omega$ $I_D=-1A$	---	18.4	---	ns
T_r	Rise Time		---	11.4	---	
$T_{d(off)}$	Turn-Off Delay Time		---	39.4	---	
T_f	Fall Time		---	5.2	---	
C_{iss}	Input Capacitance	$V_{DS}=-15V$, $V_{GS}=0V$, $f=1MHz$	---	463	---	pF
C_{oss}	Output Capacitance		---	82	---	
C_{rss}	Reverse Transfer Capacitance		---	68	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current ^{1,4}	$V_G=V_D=0V$, Force Current	---	---	-3.9	A
I_{SM}	Pulsed Source Current ^{2,4}		---	---	-16	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0V$, $I_S=-1A$, $T_J=25^{\circ}\text{C}$	---	---	-1	V

Note :

1.The data tested by surface mounted on a 1 inch² FR-4 board with 20Z copper.

2.The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$

3.The power dissipation is limited by 150°C junction temperature

4.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

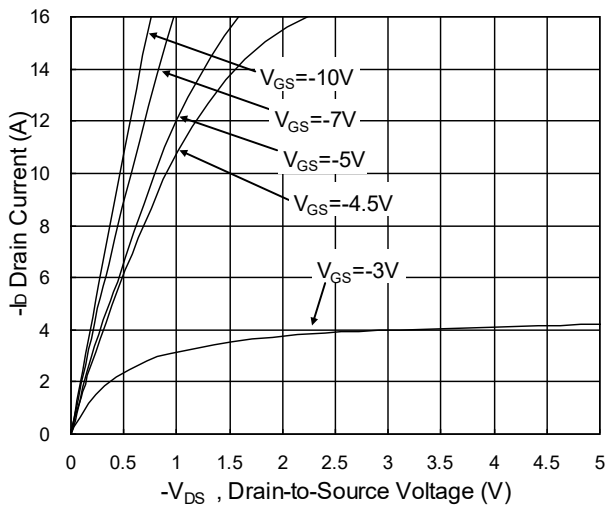


Fig.1 Typical Output Characteristics

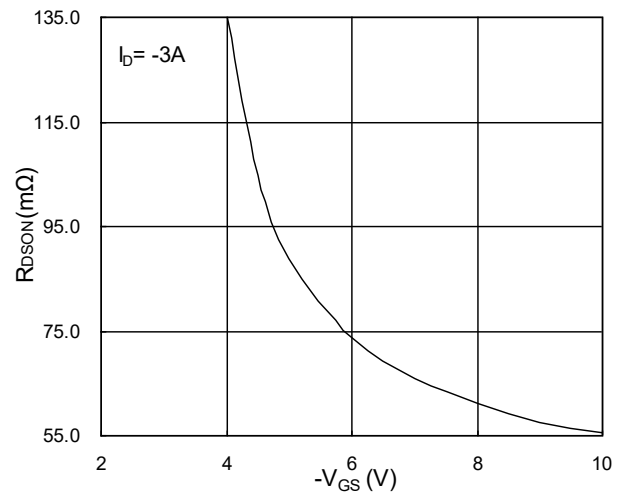


Fig.2 On-Resistance vs. G-S Voltage

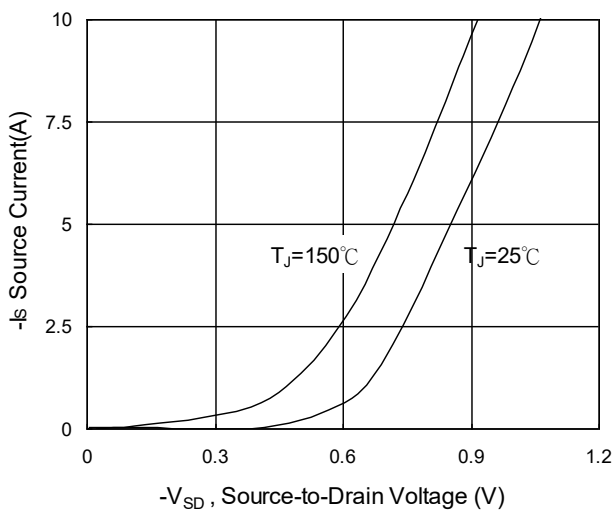


Fig.3 Forward Characteristics of Reverse

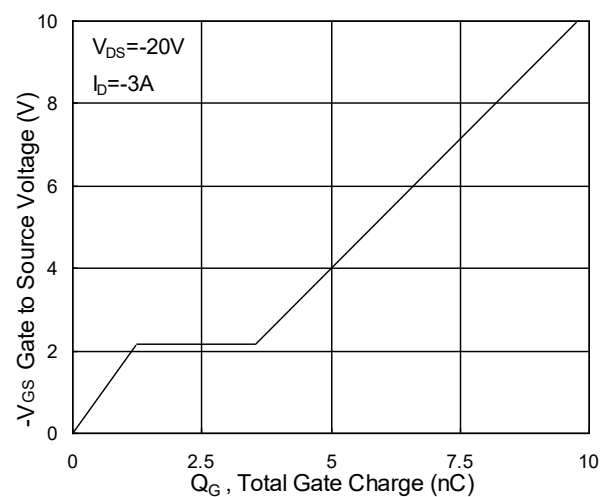


Fig.4 Gate-Charge Characteristics

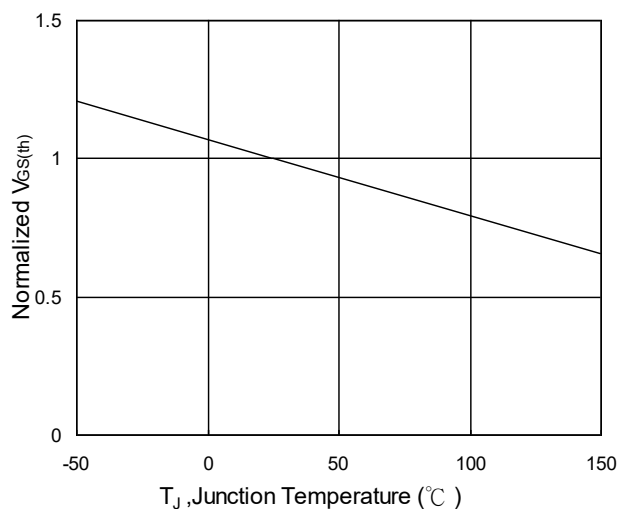


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

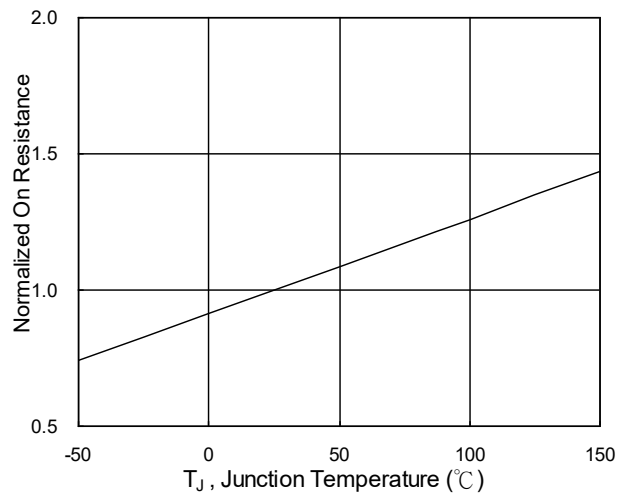


Fig.6 Normalized $R_{DS(on)}$ vs. T_J

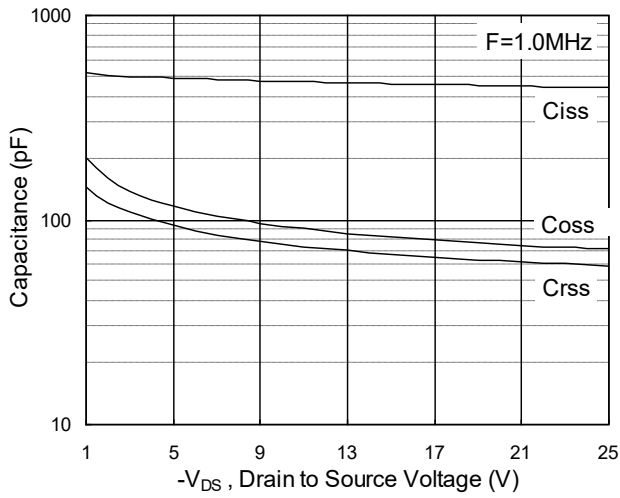


Fig.7 Capacitance

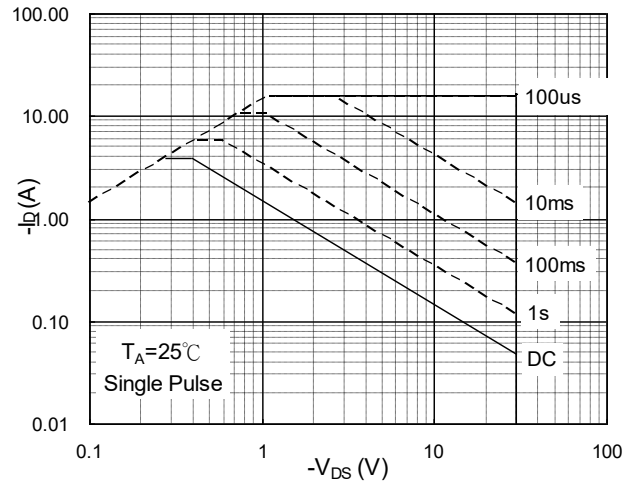


Fig.8 Safe Operating Area

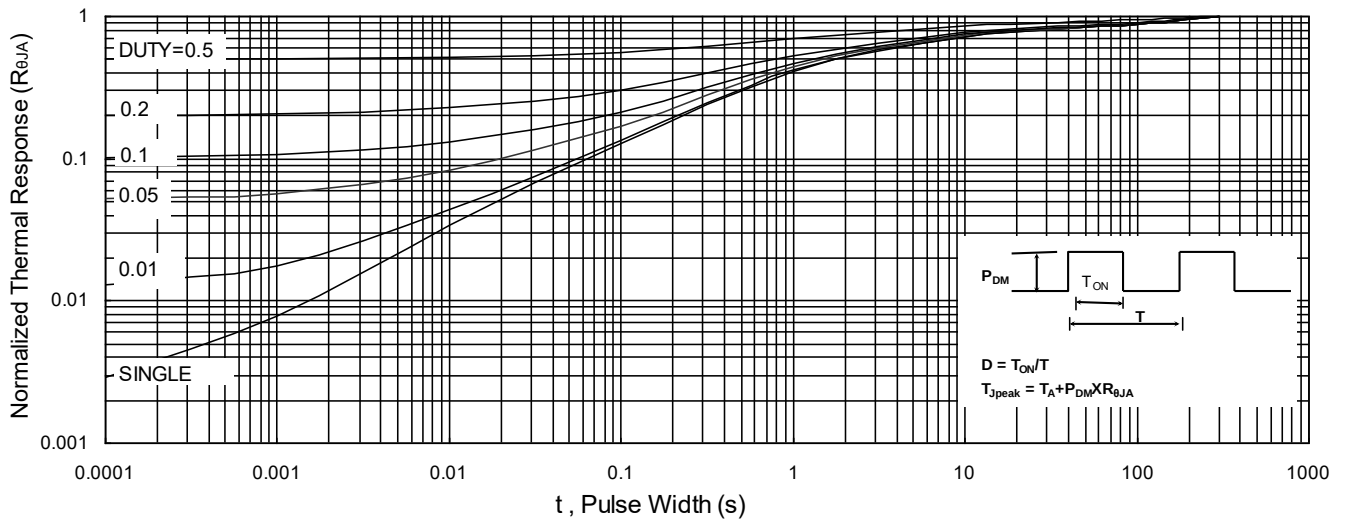


Fig.9 Normalized Maximum Transient Thermal Impedance

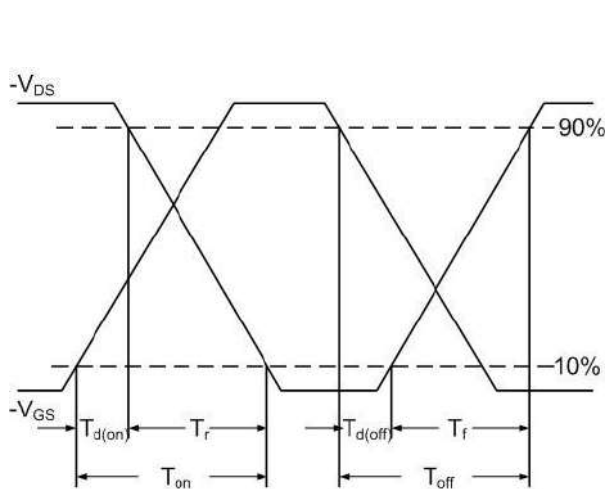


Fig.10 Switching Time Waveform

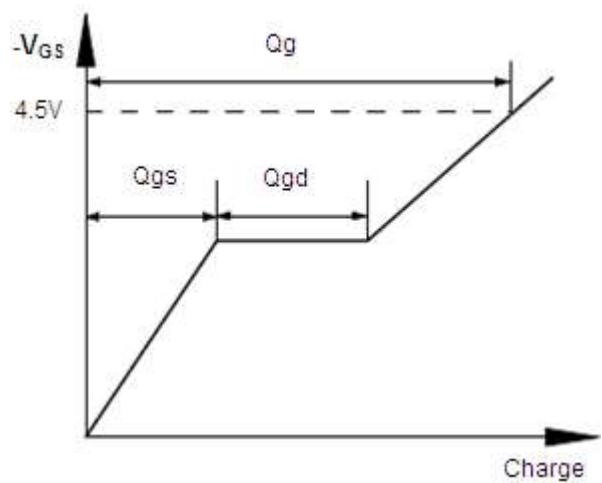


Fig.11 Gate Charge Waveform