


40.0 AMP LOW VF SCHOTTKY BARRIER RECTIFIERS

Features:

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability
- * Epitaxial construction

Mechanical Data:

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Lead solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: As Marked
- * Mounting position: Any

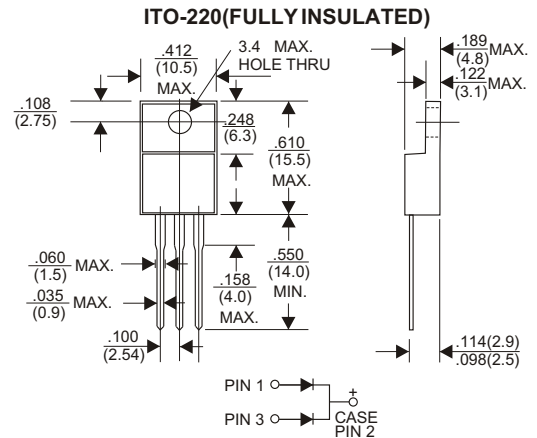

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
 Single phase half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

TYPE NUMBER	KSRF 4020LCT	KSRF 4030LCT	KSRF 4040LCT	KSRF 4050LCT	KSRF 4060LCT	KSRF 4080LCT	KSRF 40100LCT	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	V
Maximum RMS Voltage	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current at T _c =95°C	40.0							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	360							A
Maximum Instantaneous Forward Voltage per Leg at 20A	0.44		0.50		0.68			V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _a =25°C	0.2							mA
at Rated DC Blocking Voltage T _a =100°C	20							mA
Typical Junction Capacitance (Note1)	1300							pF
Typical Thermal Resistance R _{θJC} (Note 2)	2.0							°C/W
Operating Temperature Range T _J	-65— +150							°C
Storage Temperature Range T _{STG}	-65— +175							°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Case.

RATING AND CHARACTERISTIC CURVES (KSRF4020LCT THRU KSRF40100LCT)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

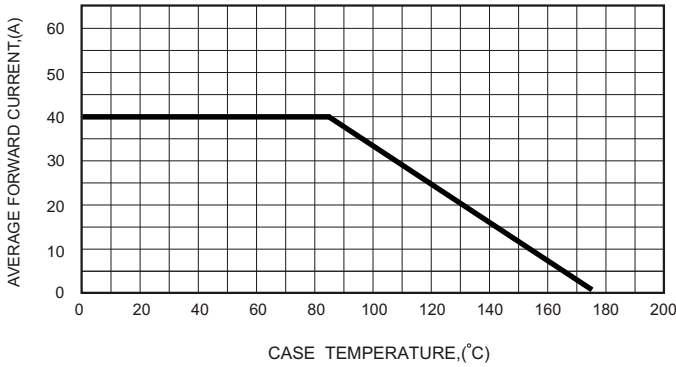


FIG.2-TYPICAL FORWARD CHARACTERISTICS

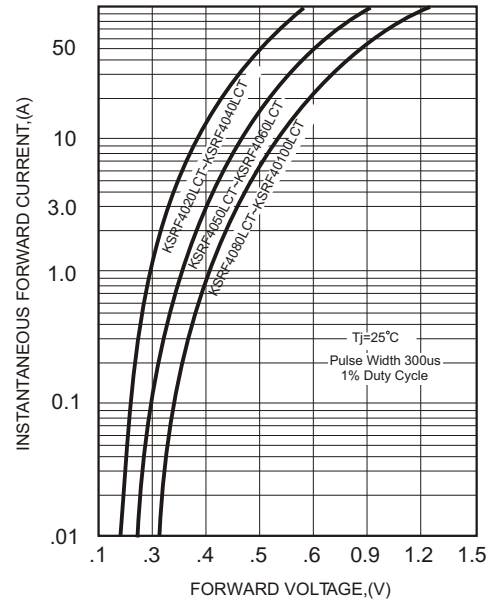


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

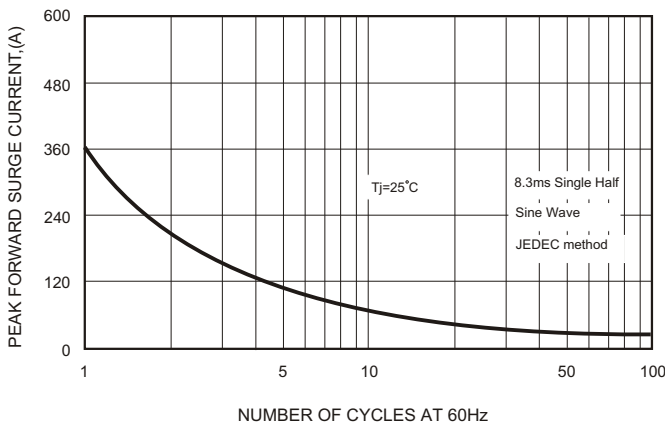


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

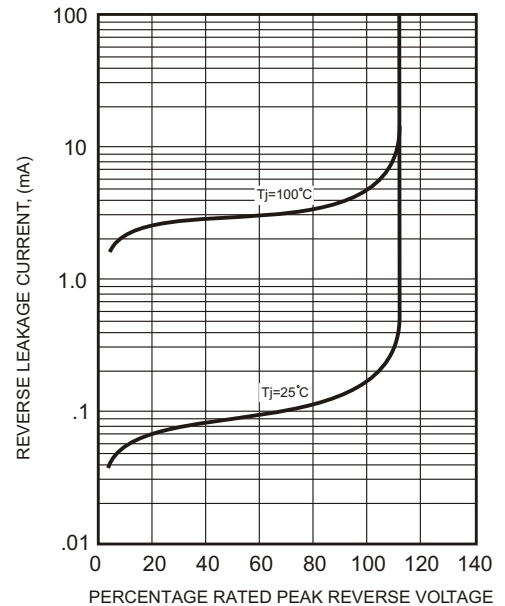


FIG.4-TYPICAL JUNCTION CAPACITANCE

