

## SMAF Plastic-Encapsulate Diodes

### LOW VF Schottky Rectifier Diodes

#### Features:

- $I_{F(AV)}$  3A
- $V_{RRM}$  60V
- High surge current capability
- Polarity: Color band denotes cathode

#### Applications:

- Rectifier

#### Marking

- SSL36

SMAF



#### Limiting Values(Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	KSSL36F
Repetitive Peak Reverse Voltage	$V_{RRM}$	V		60
Maximum RMS Voltage	$V_{RMS}$	V		42
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave , Resistance load , FIG.1	3.0
Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	60Hz Half-sine wave , 1 cycle , $T_a=25^{\circ}C$	80
Junction Temperature	$T_J$	$^{\circ}C$		-55 ~ +150
Storage Temperature	$T_{STG}$	$^{\circ}C$		-55 ~ +150

#### Electrical Characteristics ( $T = 25^{\circ}C$ Unless otherwise specified)


Item	Symbol	Unit	Test Condition	KSSL36F	
Peak Forward Voltage	$V_F$	V	$I_F=3.0A$	0.52	
Peak Reverse Current	$I_{RRM1}$	mA	$V_{RM}=V_{RRM}$	$T_a = 25^{\circ}C$	0.2
	$I_{RRM2}$			$T_a = 100^{\circ}C$	10
Thermal Resistance(Typical)	$R_{\theta J-A}$	$^{\circ}C/W$	Between junction and ambient	75	
	$R_{\theta J-L}$		Between junction and terminal	15	

#### Notes:


Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

**Typical Characteristics**


**FIG.1: FORWARD CURRENT DERATING CURVE**

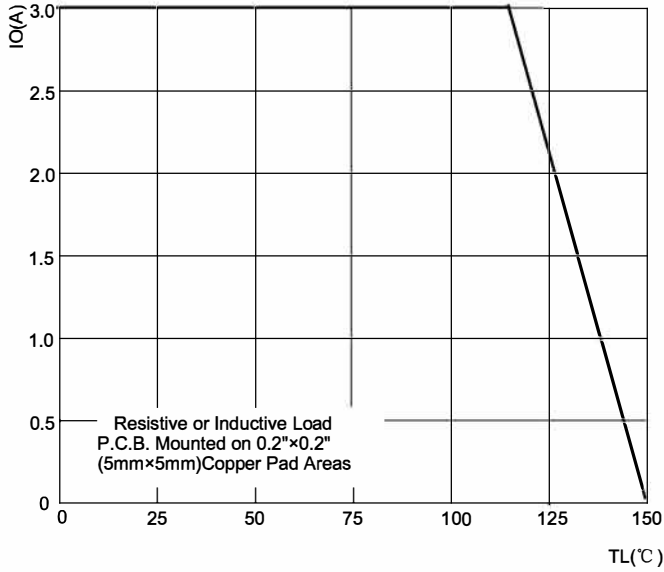


**FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

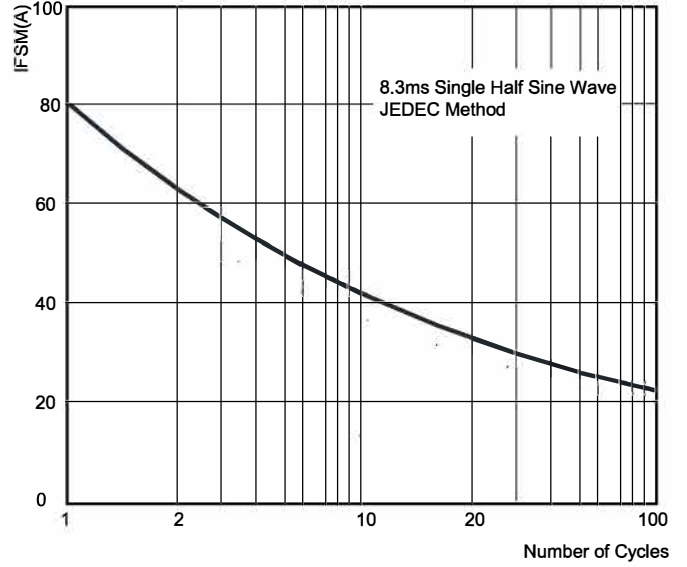


**FIG.3: TYPICAL FORWARD CHARACTERISTICS**

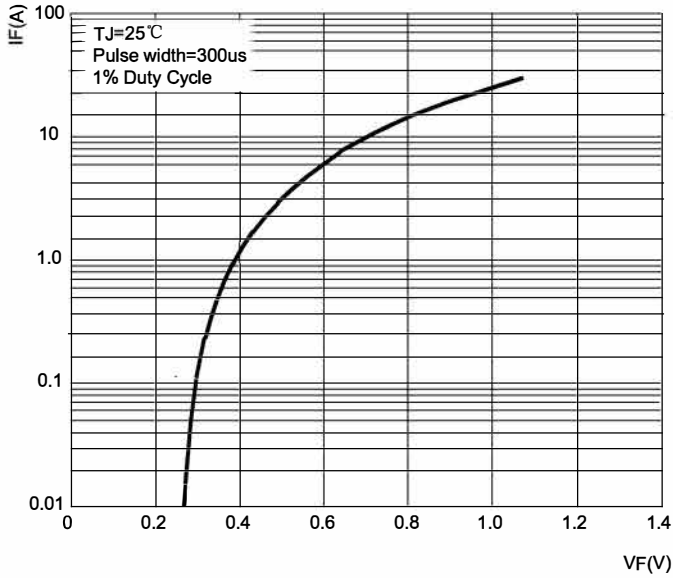

**FIG.4: TYPICAL REVERSE CHARACTERISTICS**

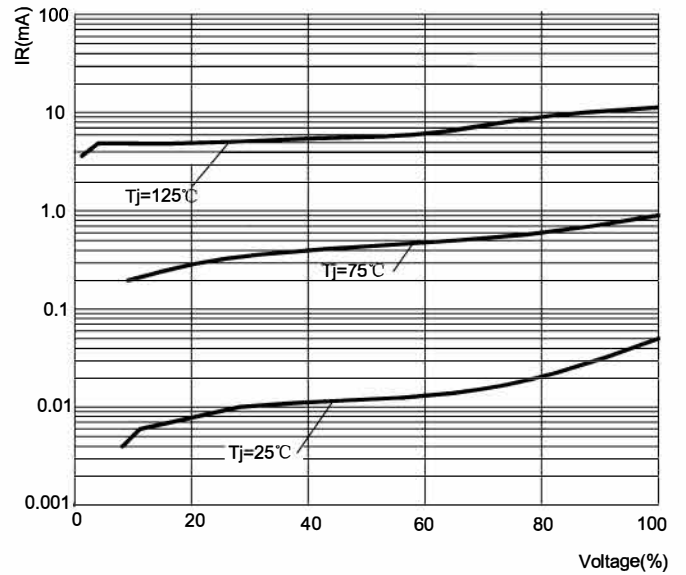


### SMAF Package Outline Dimensions

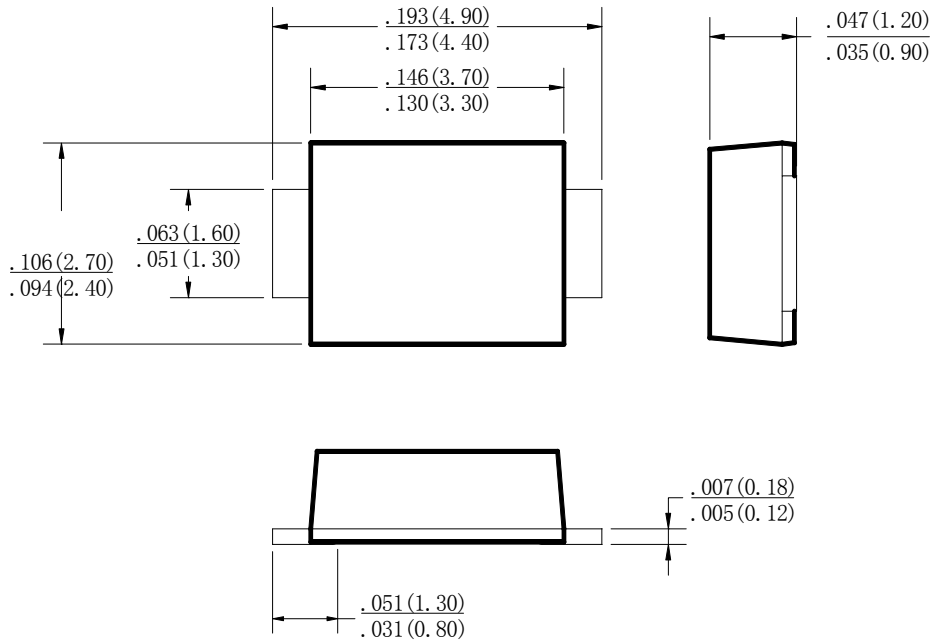

Dimensions in inches and (millimeters)


### SMAF Suggested Pad Layout

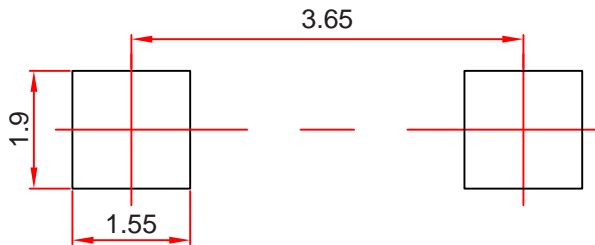

**Note:**

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$  mm.
3. The pad layout is for reference purposes only.

**Reel Taping Specifications For Surface Mount Devices- SMAF**

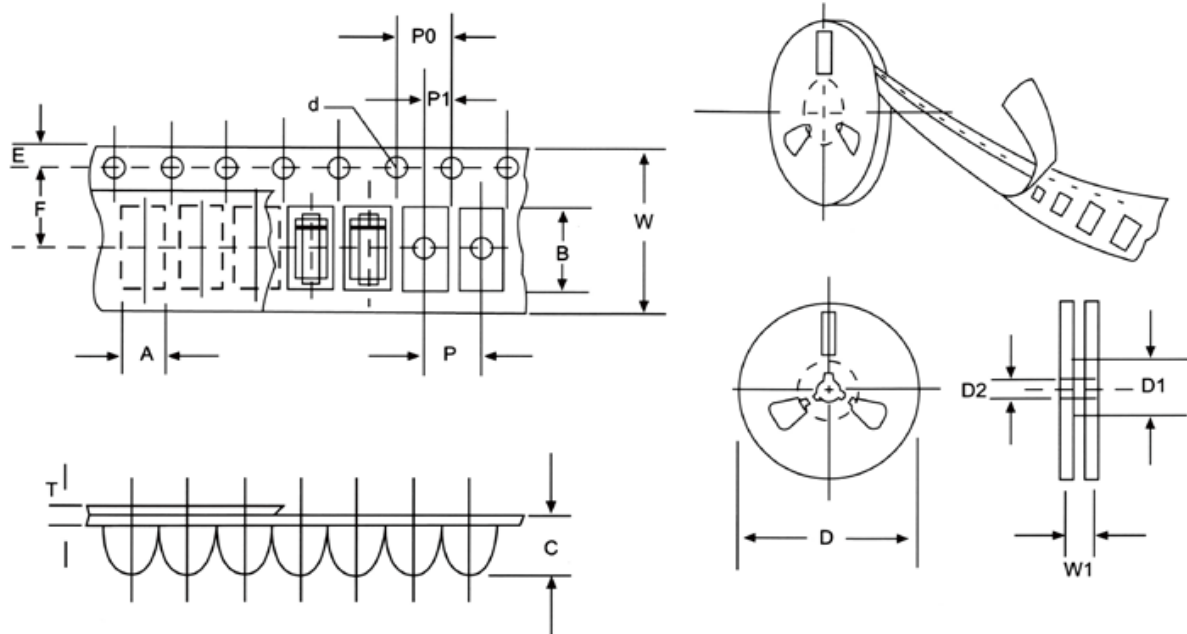

**FIG: CONFIGURATION OF SURFACE MOUNTED DEVICES TAPING**

ITEM	SYMBOL	SMAF mm(inch)
Carrier width	A	2.83+0.1(0.112+0.004)
Carrier length	B	4.90+0.1(0.193+0.004)
Carrier depth	C	1.45+0.1(0.057+0.004)
Sprocket hole	d	1.55+0.05(0.061+0.002)
Reel outside diameter	D	178+2.0(7.0+0.079)
Reel inner diameter	D1	54±1.0(2.13±0.039)
Feed hole diameter	D2	13+0.5(0.512+0.020)
Sprocket hole position	E	1.75+0.1(0.069+0.004)
Punch hole position	F	5.5+0.05(0.217+0.002)
Punch hole pitch	P	4.0+0.1(0.157+0.004)
Sprocket hole pitch	P0	4.0+0.1(0.157+0.004)
Embossment center	P1	2.0+0.1(0.079+0.004)
Totall tape thickness	T	0.23-0.29(0.009-0.011)
Tape width	W	12.0+0.1(0.472+0.004)
Reel width	W1	16.8+2.0(0.661+0.079)

NOTE: Devices are packde in accordance with EIA standard RS-481-A and specification given above.