



## N-Channel Logic Level Enhancement Mode Power MOSFET

### Features:

- Single Drive Requirement
- Low On-resistance
- Fast Switching Characteristic
- Repetitive Avalanche Rated
- Pb-free lead plating and halogen-free package

TO-252

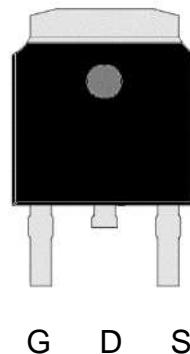

G : Gate S : Source D : Drain

BV <sub>DSS</sub>	30V
I <sub>D</sub> @V <sub>GS</sub> =10V, T <sub>C</sub> =25°C	56A
I <sub>D</sub> @V <sub>GS</sub> =10V, T <sub>A</sub> =25°C	15A
R <sub>D(S)</sub> (ON)@V <sub>GS</sub> =10V, I <sub>D</sub> =20A	4mΩ
R <sub>D(S)</sub> (ON)@V <sub>GS</sub> =4.5V, I <sub>D</sub> =10A	5.5mΩ

### Ordering Information

Device	Package	Shipping
KJB4D0N03B	TO-252 (Pb-free lead plating and halogen-free package)	2500 pcs / tape& reel

### Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ )

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	V <sub>DS</sub>	30	V
Gate-Source Voltage	V <sub>GS</sub>	±20	
Continuous Drain Current @ V <sub>GS</sub> =10V, T <sub>C</sub> =25°C	I <sub>D</sub>	56	A
Continuous Drain Current @ V <sub>GS</sub> =10V, T <sub>C</sub> =100°C		35	
Continuous Drain Current @ V <sub>GS</sub> =10V, T <sub>A</sub> =25°C		15	
Continuous Drain Current @ V <sub>GS</sub> =10V, T <sub>A</sub> =70°C		12	
Pulsed Drain Current	I <sub>DM</sub>	224	
Continuous Body Diode Forward Current @ T <sub>A</sub> =25°C	I <sub>S</sub>	15	
Pulsed Body Diode Forward Current @ T <sub>A</sub> =25°C	I <sub>SM</sub>	60	
Avalanche Current @ L=0.1mH	I <sub>AS</sub>	25	
Avalanche Energy @ L=0.5mH	E <sub>AS</sub>	50	mJ
Total Power Dissipation	P <sub>D</sub>	36	W
T <sub>C</sub> =25°C		15	
T <sub>C</sub> =100°C		2.5	
T <sub>A</sub> =25°C		1.6	
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>Stg</sub>	-55~+150	°C

### Thermal Data

Parameter	Symbol	Steady State	Unit
Thermal Resistance, Junction-to-case	R <sub>θJC</sub>	3.5	°C/W
Thermal Resistance, Junction-to-ambient	R <sub>θJA</sub>	50	

Note:

- \*a. The power dissipation P<sub>D</sub> is based on T<sub>J(MAX)</sub>=150°C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
- \*b. The value of R<sub>θJA</sub> is measured with the device mounted on 1 in<sup>2</sup> FR-4 board with 2 oz. copper, in a still air environment with T<sub>A</sub>=25°C. The power dissipation P<sub>DSM</sub> is based on R<sub>θJA</sub> and the maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design.
- \*c. Repetitive rating, pulse width limited by junction temperature T<sub>J(MAX)</sub>=150°C. Ratings are based on low frequency and low duty cycles to keep initial T<sub>J</sub>=25°C.

**Characteristics ( $T_A=25^\circ\text{C}$ , unless otherwise specified)**

Symbol	Min.	Typ.	Max.	Unit	Test Conditions	
<b>Static</b>						
BV <sub>DSS</sub>	30	-	-	V	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA	
V <sub>GS(th)</sub>	1	-	2.5		V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA	
G <sub>FS</sub>	-	25	-	S	V <sub>DS</sub> =5V, I <sub>D</sub> =15A	
I <sub>GSS</sub>	-	-	±100	nA	V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V	
I <sub>DSS</sub>	-	-	1	μA	V <sub>DS</sub> =24V, V <sub>GS</sub> =0V	
R <sub>DSS(ON)</sub>	-	4	5.2	mΩ	V <sub>GS</sub> =10V, I <sub>D</sub> =20A	
	-	5.5	7.5		V <sub>GS</sub> =4.5V, I <sub>D</sub> =10A	
<b>Dynamic</b>						
C <sub>iss</sub>	-	1500	-	pF	V <sub>DS</sub> =15V, V <sub>GS</sub> =0V, f=1MHz	
C <sub>oss</sub>	-	280	-			
C <sub>rss</sub>	-	190	-	nC	V <sub>DS</sub> =15V, I <sub>D</sub> =15A, V <sub>GS</sub> =10V	
R <sub>g</sub>	-	1.5	-			
Q <sub>g</sub> *1, 2	-	32	-	ns	V <sub>DS</sub> =15V, I <sub>D</sub> =15A, V <sub>GS</sub> =10V, R <sub>gs</sub> =3Ω	
Q <sub>gs</sub> *1, 2	-	4	-			
Q <sub>gd</sub> *1, 2	-	9	-	ns	V <sub>DS</sub> =15V, I <sub>D</sub> =15A, V <sub>GS</sub> =10V, R <sub>gs</sub> =3Ω	
t <sub>d(ON)</sub> *1, 2	-	13	-			
t <sub>r</sub> *1, 2	-	18	-	ns	V <sub>DS</sub> =15V, I <sub>D</sub> =15A, V <sub>GS</sub> =10V, R <sub>gs</sub> =3Ω	
t <sub>d(OFF)</sub> *1, 2	-	44	-			
t <sub>f</sub> *1, 2	-	11	-			
<b>Source-Drain Diode</b>						
V <sub>SD</sub> *1	-	0.84	1.2	V	I <sub>s</sub> =20A, V <sub>GS</sub> =0V	
tr	-	12	-	ns	I <sub>F</sub> =20A, dI <sub>F</sub> /dt=100A/μs	
Q <sub>rr</sub>	-	4	-			


Note:

\*1. Pulse Test : Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$


\*2. Independent of operating temperature

## Typical Characteristics


Typical Output Characteristics

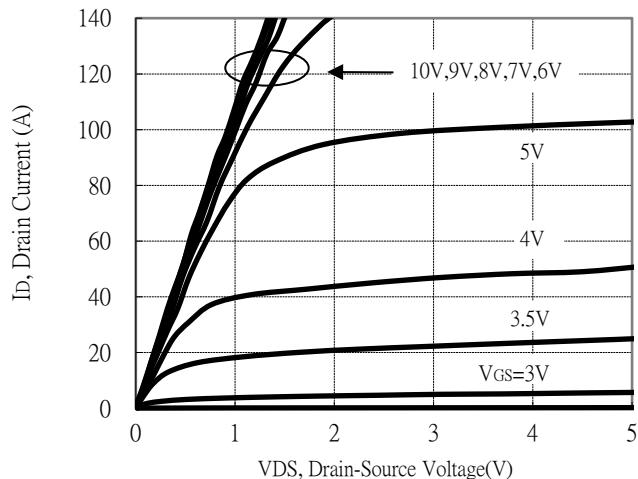


Breakdown Voltage vs Junction Temperature

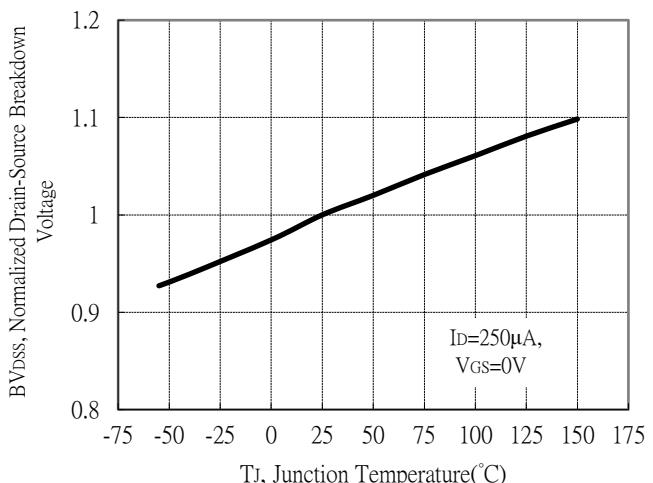


Static Drain-Source On-State resistance vs Drain Current

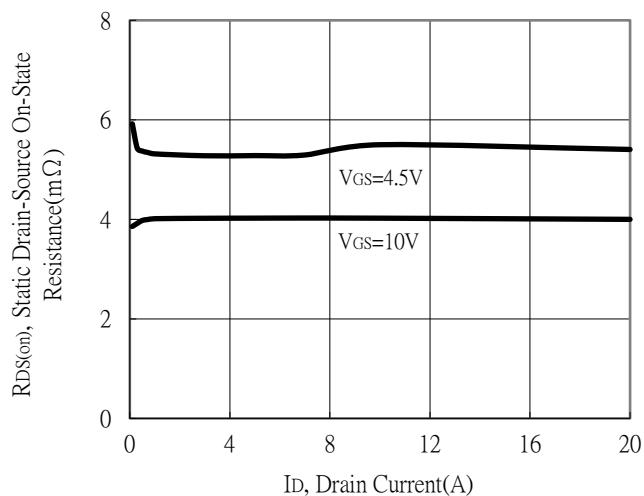


Body Diode Current vs Source-Drain Voltage

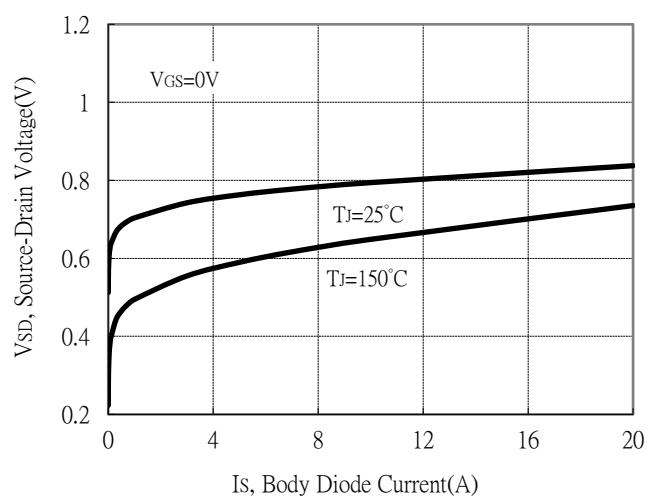

Static Drain-Source On-State Resistance vs Gate-Source Voltage

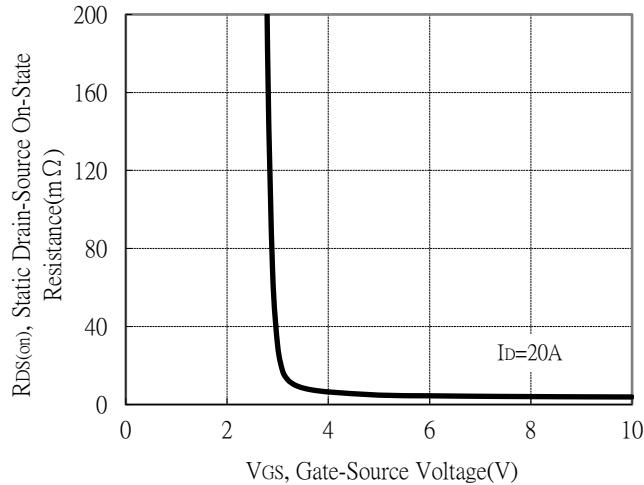


Drain-Source On-State Resistance vs Junction Temperature

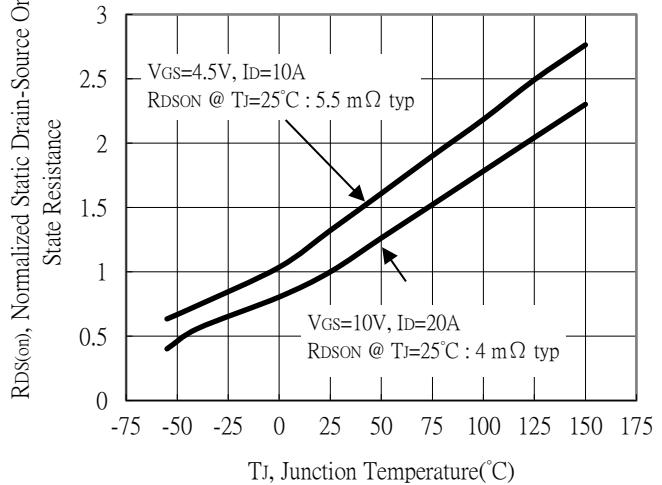


## Typical Characteristics(Cont.)


Capacitance vs Drain-to-Source Voltage

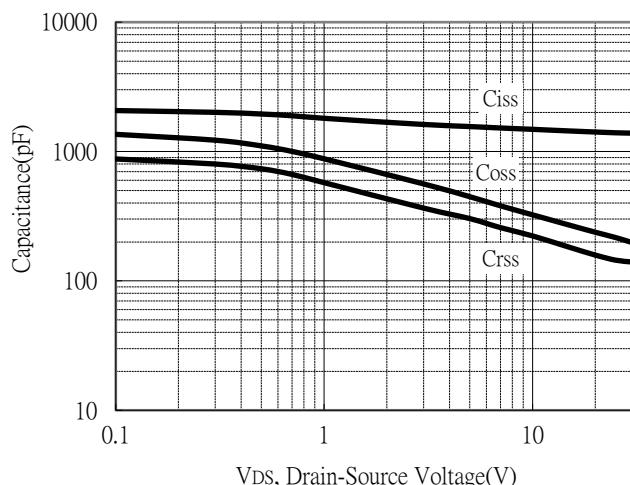


Threshold Voltage vs Junction Temperature

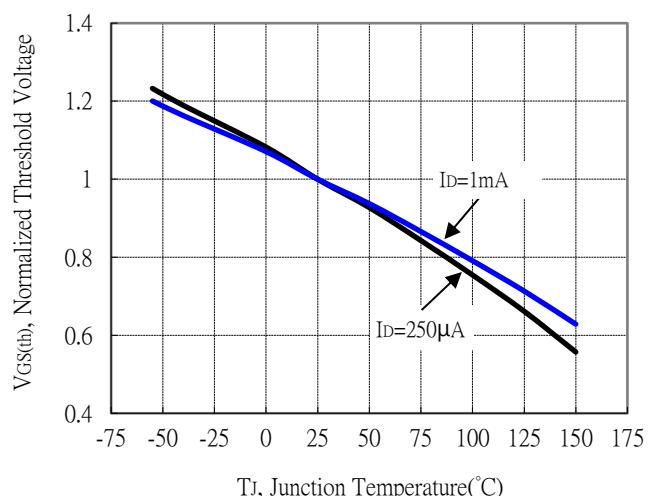


Forward Transfer Admittance vs Drain Current

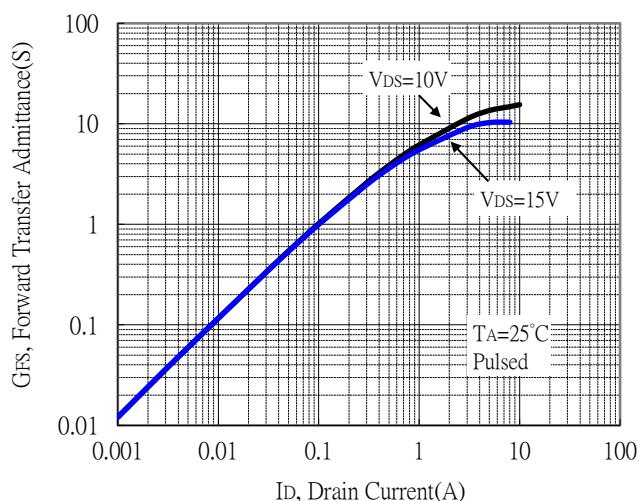


Gate Charge Characteristics

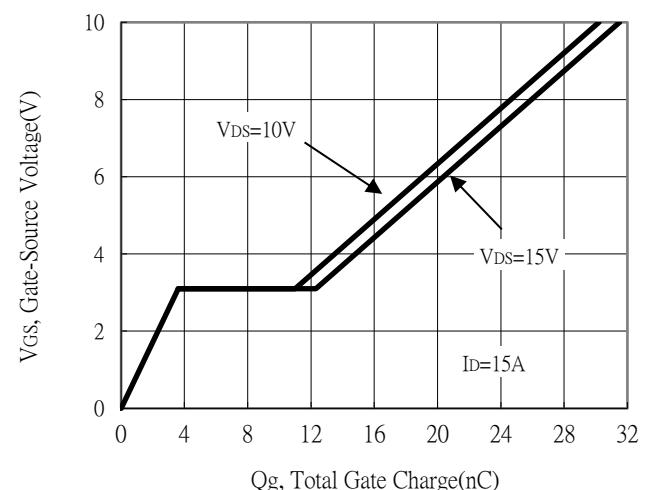

Maximum Safe Operating Area

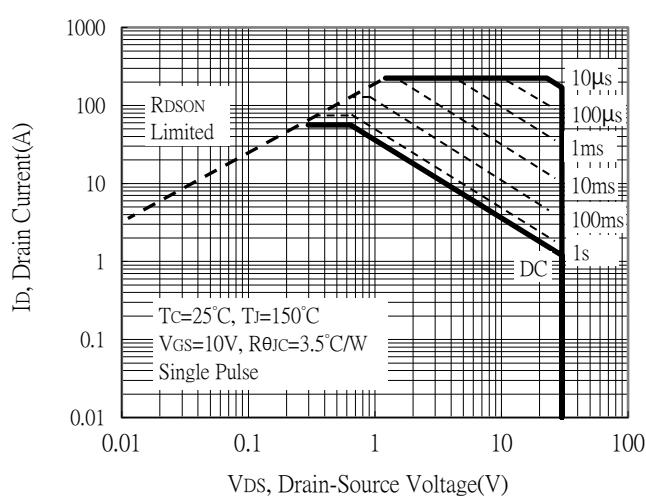


Maximum Drain Current vs Case Temperature

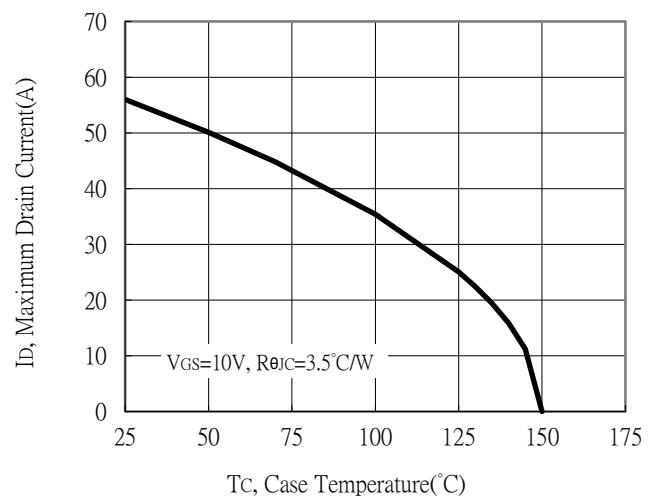


## Typical Characteristics(Cont.)


Single Pulse Power Rating, Junction to Ambient

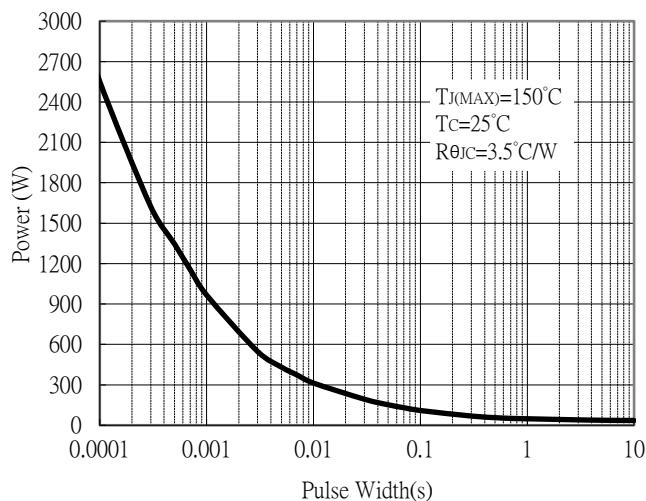


Transient Thermal Response Curves

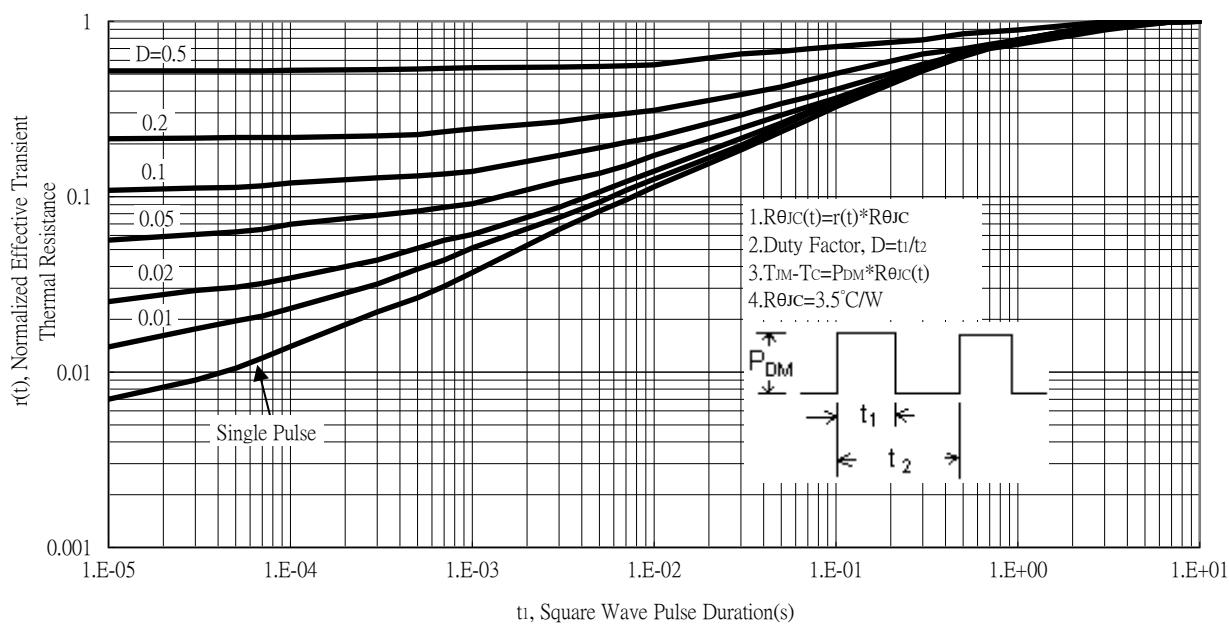

## Recommended soldering footprint

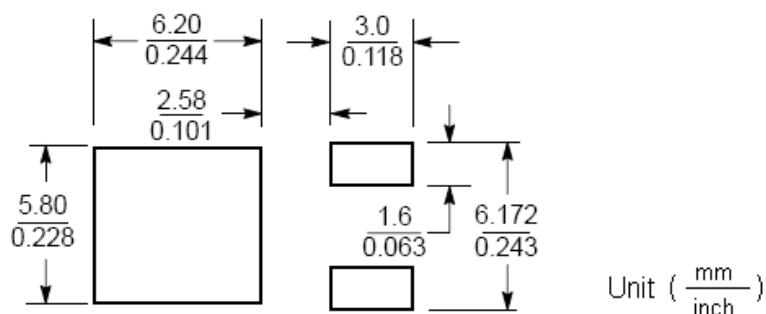


## Reel Dimension

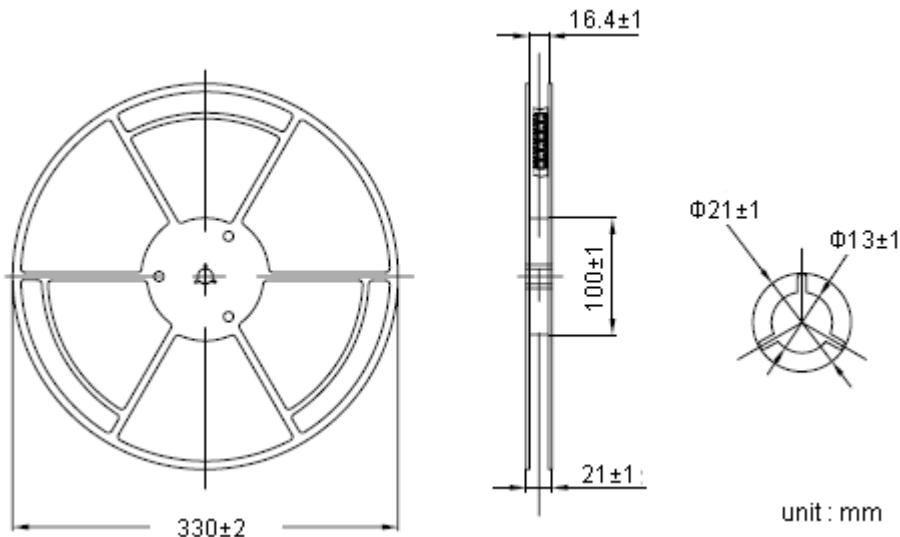

unit : mm

## Carrier Tape Dimension


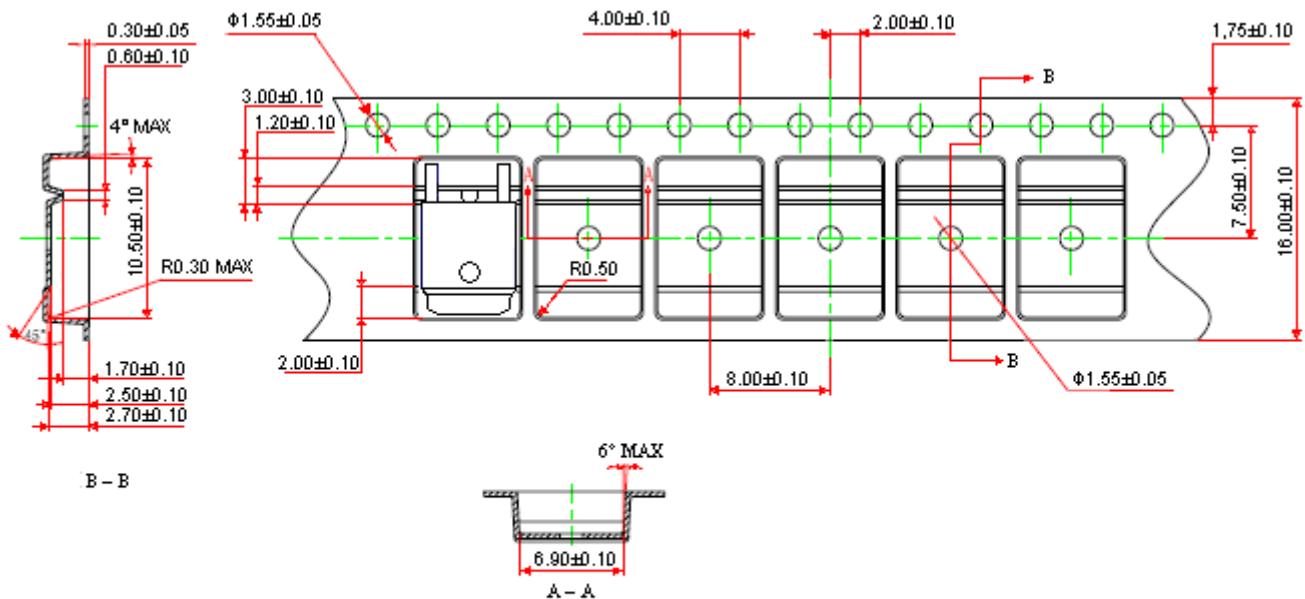


Notes:


1. 10 sprocket hole pitch cumulative tolerance ±0.2.
2. Camber not to exceed 1mm in 100mm.
3. Material: conductive black polystyrene, antistatic coated :  $10^5 \Omega/\square \sim 10^{11} \Omega/\square$

unit : mm

## TO-252 Dimension

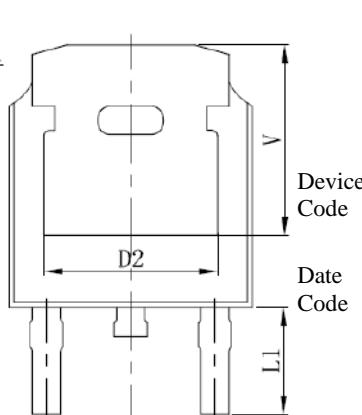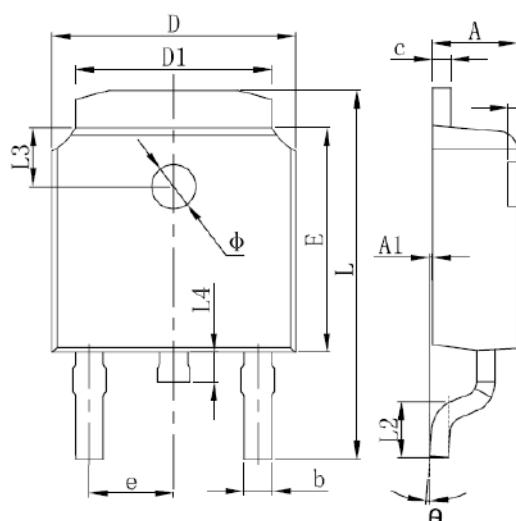

Marking:

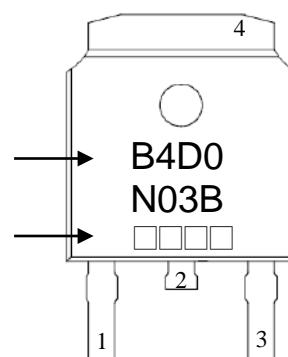

Style: Pin 1.Gate 2.Drain 3.Source  
4.Drain

3-Lead TO-252 Plastic Surface Mount Package

Date Code(counting from left to right) :

1<sup>st</sup> code: year code, the last digit of Christian year

2<sup>nd</sup> code : month code, Jan→A, Feb→B, Mar→C,

Apr→D, May→E, Jun→F, Jul→G, Aug→H,

Sep→J, Oct→K, Nov→L, Dec→M

3<sup>rd</sup> and 4<sup>th</sup> codes : production serial number, 01~99

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.087	0.094	2.200	2.400	L	0.382	0.406	9.712	10.312
A1	0.000	0.005	0.000	0.127	L1	0.114	REF	2.900	REF
b	0.025	0.030	0.635	0.770	L2	0.055	0.067	1.400	1.700
c	0.018	0.023	0.460	0.580	L3	0.063	REF	1.600	REF
D	0.256	0.264	6.500	6.700	L4	0.024	0.039	0.600	1.000
D1	0.201	0.215	5.100	5.460	Φ	0.043	0.051	1.100	1.300
D2	0.190	REF	4.830	REF	θ	0°	8°	0°	8°
E	0.236	0.244	6.000	6.200	h	0.000	0.012	0.000	0.300
e	0.086	0.094	2.186	2.386	V	0.207	REF	5.250	REF