


## P-Channel Enhancement Mode Power MOSFET


### Features:

- Low On Resistance
- Low Gate Charge
- Fast Switching Characteristic

TO-252



$BV_{DSS}$	-30V
$I_D @ V_{GS} = -10V, T_c = 25^\circ C$	-46A
$I_D @ V_{GS} = -10V, T_a = 25^\circ C$	-10A
$R_{DS(ON)} \text{ typ. } @ V_{GS} = -10V, I_D = -20A$	8.5m $\Omega$
$R_{DS(ON)} \text{ typ. } @ V_{GS} = -4.5V, I_D = -15A$	13m $\Omega$



G : Gate S : Source D : Drain

### Ordering Information

Device	Package	Shipping
KJB9D0P03	TO-252 (Pb-free lead plating and halogen-free package)	2500 pcs / Tape & Reel



## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ )

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	V <sub>DS</sub>	-30	V
Gate-Source Voltage	V <sub>GS</sub>	±20	
Continuous Drain Current @ V <sub>GS</sub> =10V, T <sub>C</sub> =25°C	I <sub>D</sub>	-46	A
Continuous Drain Current @ V <sub>GS</sub> =10V, T <sub>C</sub> =100°C		-29	
Continuous Drain Current @ V <sub>GS</sub> =10V, T <sub>A</sub> =25°C		-10	
Continuous Drain Current @ V <sub>GS</sub> =10V, T <sub>A</sub> =70°C		-8	
Pulsed Drain Current	I <sub>DM</sub>	-184	
Continuous Body Diode Forward Current @ T <sub>C</sub> =25°C	I <sub>S</sub>	-41	
Avalanche Current @ L=0.1mH	I <sub>AS</sub>	-20	
Avalanche Energy @ L=0.5mH	E <sub>AS</sub>	36	mJ
Total Power Dissipation	T <sub>C</sub> =25°C	*a	W
	T <sub>C</sub> =100°C	*a	
	T <sub>A</sub> =25°C	*b	
	T <sub>A</sub> =70°C	*b	
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55~+150	°C

## Thermal Data

Parameter	Symbol	Steady State	Unit
Thermal Resistance, Junction-to-case	R <sub>θJC</sub>	2.5	°C/W
Thermal Resistance, Junction-to-ambient	R <sub>θJA</sub>	50	

Note:

- \*a. The power dissipation P<sub>D</sub> is based on T<sub>J(MAX)</sub>=150°C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
- \*b. The value of R<sub>θJA</sub> is measured with the device mounted on 1 in<sup>2</sup> FR -4 board with 2 oz. copper, in a still air environment with T<sub>A</sub>=25°C. The power dissipation P<sub>D</sub> is based on R<sub>θJA</sub> and the maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design.
- \*c. Repetitive rating, pulse width limited by junction temperature T<sub>J(MAX)</sub>=150°C. Ratings are based on low frequency and low duty cycles to keep initial T<sub>J</sub>=25°C.

### **Electrical Characteristics ( $T_A=25^\circ\text{C}$ , unless otherwise specified)**







Symbol	Min.	Typ.	Max.	Unit	Test Conditions	
<b>Static</b>						
BV <sub>DSS</sub>	-30	-	-	V	V <sub>GS</sub> =0V, I <sub>D</sub> =-250μA	
V <sub>GS(th)</sub>	-1	-	-2.5		V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250μA	
G <sub>FS</sub>	-	19.6	-	S	V <sub>DS</sub> =-10V, I <sub>D</sub> =-20A	
I <sub>GSS</sub>	-	-	±100	nA	V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V	
I <sub>DSS</sub>	-	-	-1	μA	V <sub>DS</sub> =-24V, V <sub>GS</sub> =0V	
R <sub>DSS(ON)</sub>	-	8.5	11	mΩ	V <sub>GS</sub> =-10V, I <sub>D</sub> =-20A	
	-	13	18		V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-15A	
<b>Dynamic</b>						
C <sub>iss</sub>	-	2250	-	pF	V <sub>DS</sub> =-15V, V <sub>GS</sub> =0V, f=1MHz	
C <sub>oss</sub>	-	300	-			
C <sub>rss</sub>	-	220	-	nC	V <sub>DS</sub> =-15V, I <sub>D</sub> =-20A, V <sub>GS</sub> =-10V	
R <sub>g</sub>	-	6.1	-			
Q <sub>g</sub> *1, 2	-	51	-	ns	V <sub>DS</sub> =-15V, I <sub>D</sub> =-20A, V <sub>GS</sub> =-10V	
Q <sub>gs</sub> *1, 2	-	7.5	-			
Q <sub>gd</sub> *1, 2	-	12	-	ns	V <sub>DS</sub> =-15V, I <sub>D</sub> =-20A, V <sub>GS</sub> =-10V, R <sub>GS</sub> =1Ω	
t <sub>d(ON)</sub> *1, 2	-	14	-			
t <sub>r</sub> *1, 2	-	21	-	ns	V <sub>DS</sub> =-15V, I <sub>D</sub> =-20A, V <sub>GS</sub> =-10V, R <sub>GS</sub> =1Ω	
t <sub>d(OFF)</sub> *1, 2	-	77	-			
t <sub>f</sub> *1, 2	-	18	-			
<b>Source-Drain Diode</b>						
V <sub>SD</sub> *1	-	-0.73	-1.2	V	I <sub>S</sub> =-1A, V <sub>GS</sub> =0V	
trr	-	33	-	ns	I <sub>F</sub> =-1A, dI <sub>F</sub> /dt=100A/μs	
Qrr	-	13	-	nC		

Note:







\*1. Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%

\*2. Independent of operating temperature

## Typical Characteristics

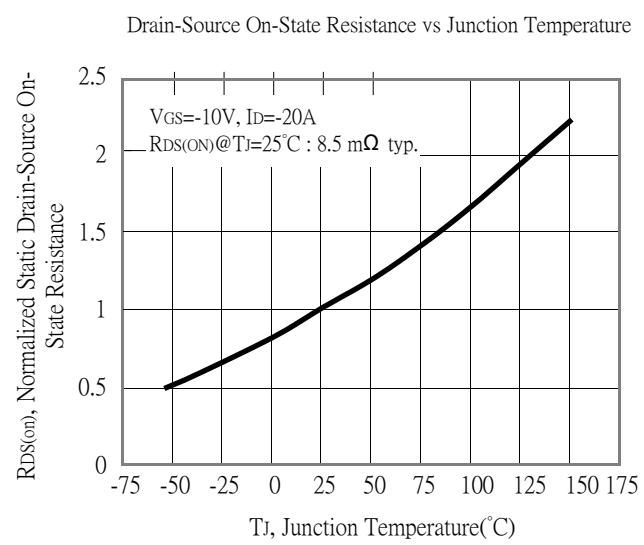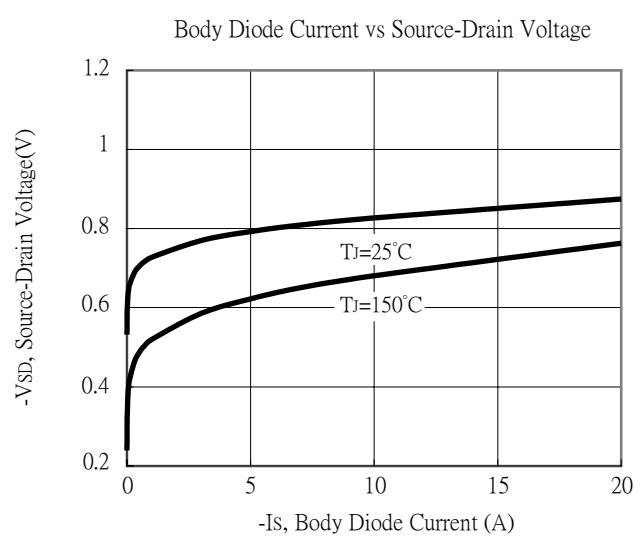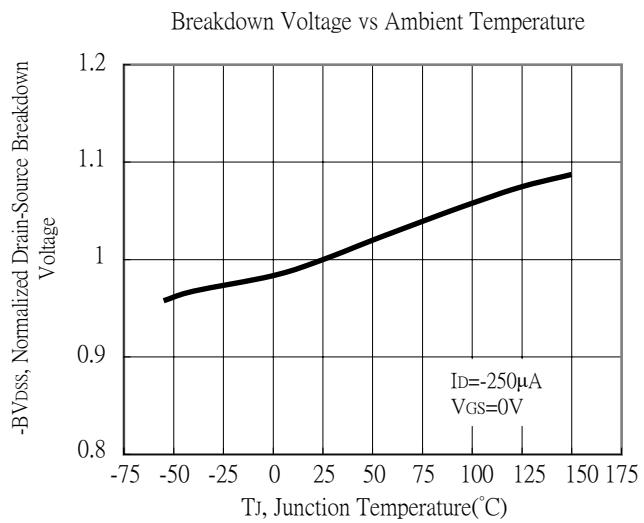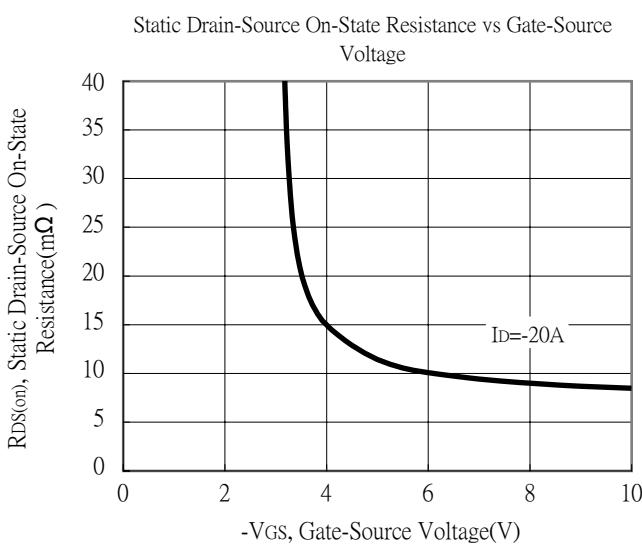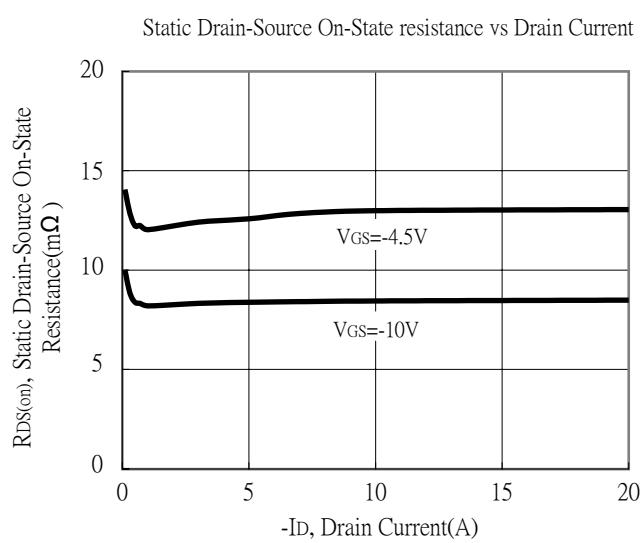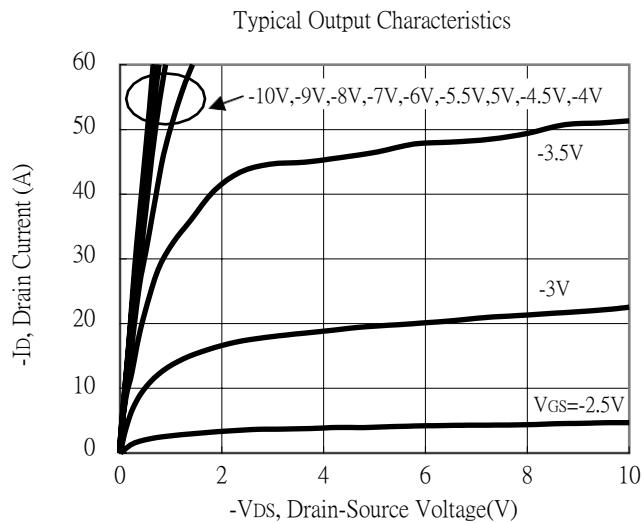


## Typical Characteristics (Cont.)

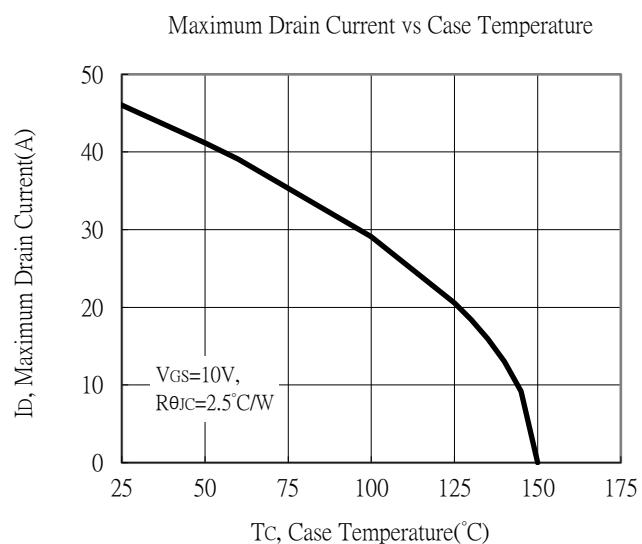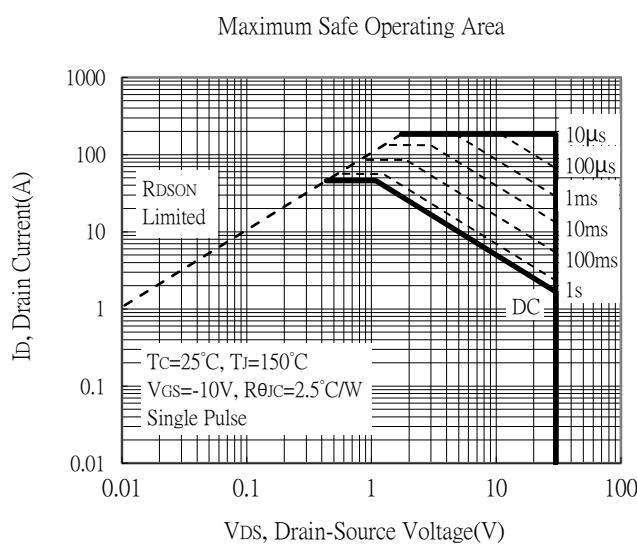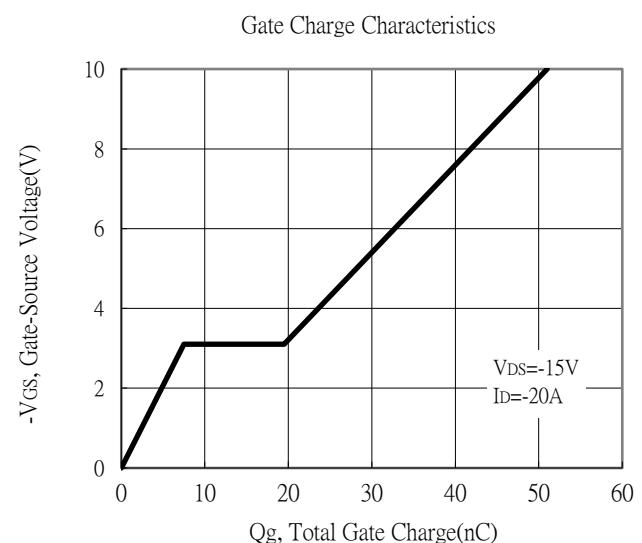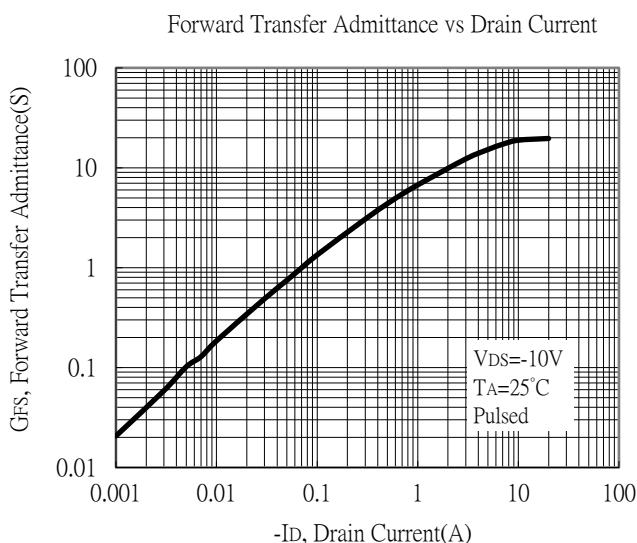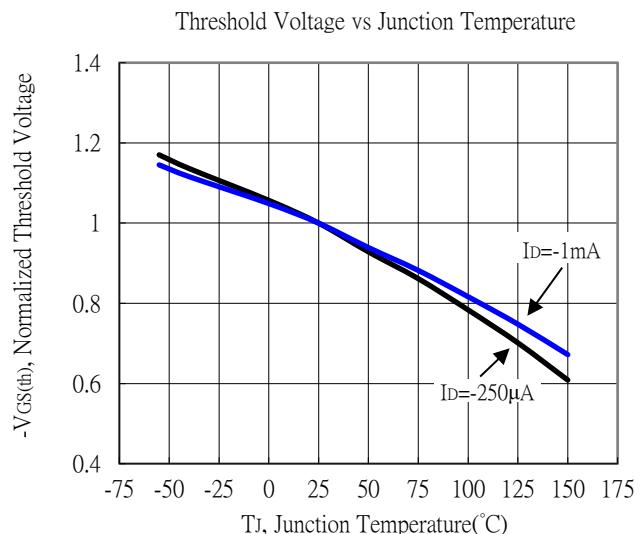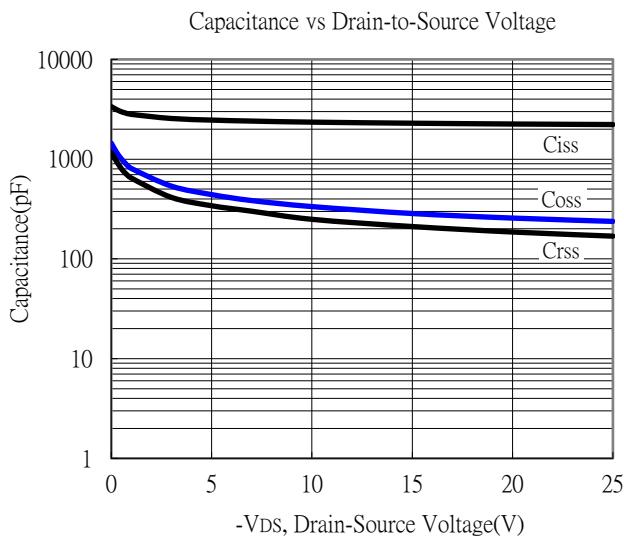


## Typical Characteristics (Cont.)


Single Pulse Power Rating, Junction to Case

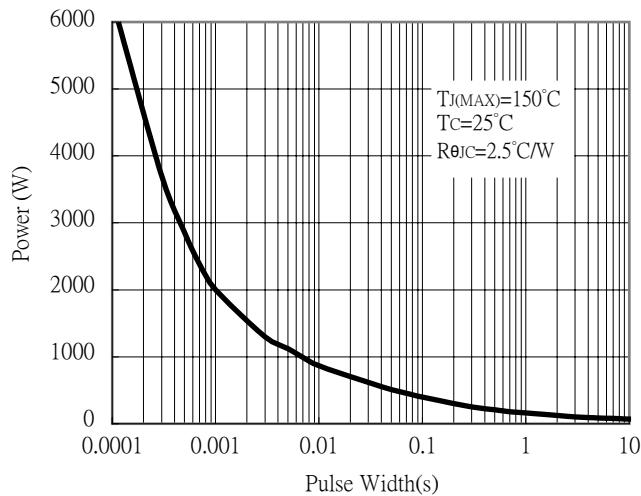


Transient Thermal Response Curves

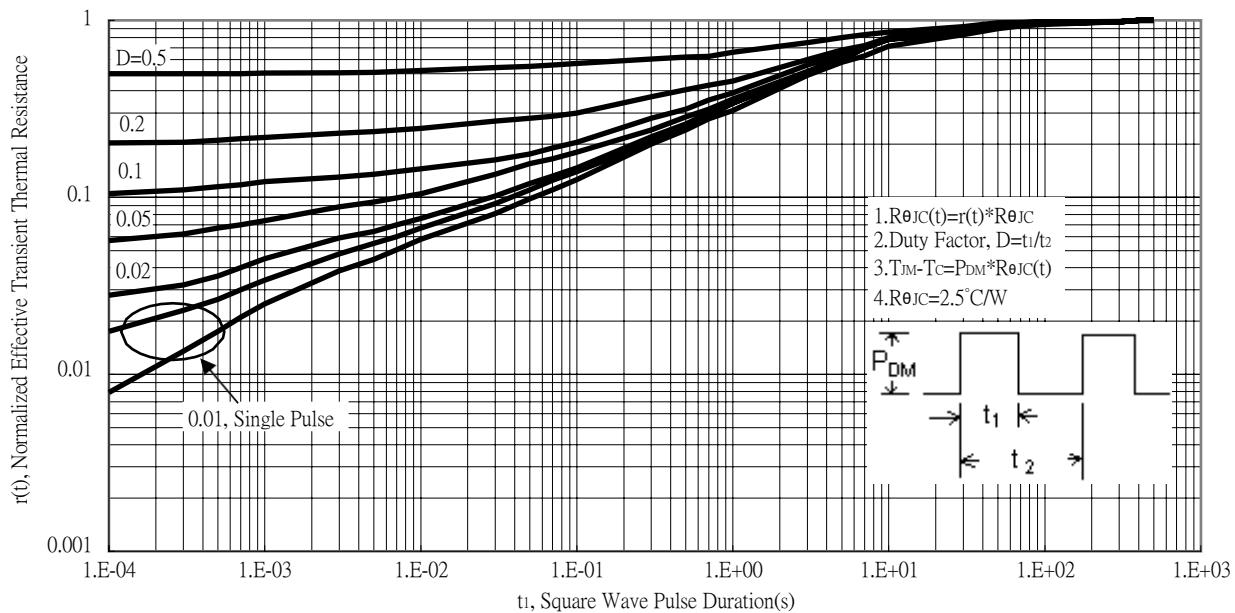


## Recommended soldering footprint

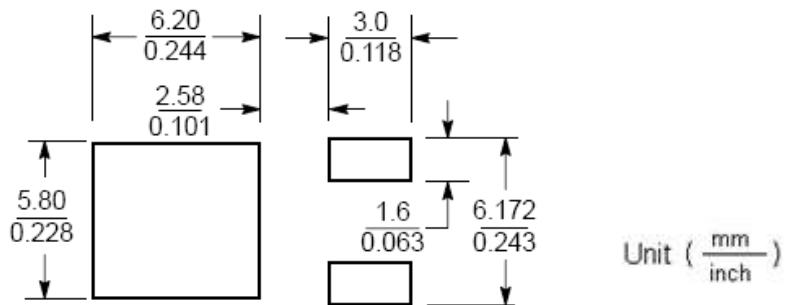

## Reel Dimension

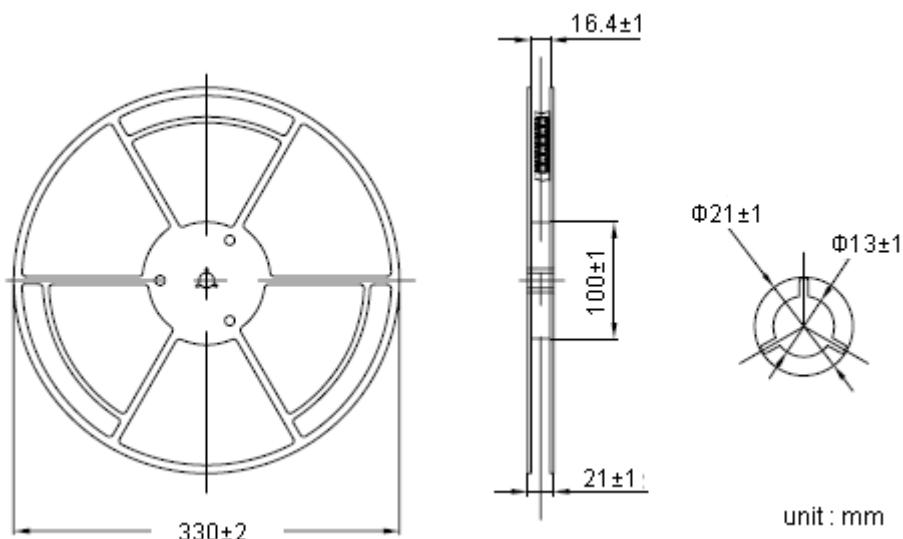

## Carrier Tape Dimension

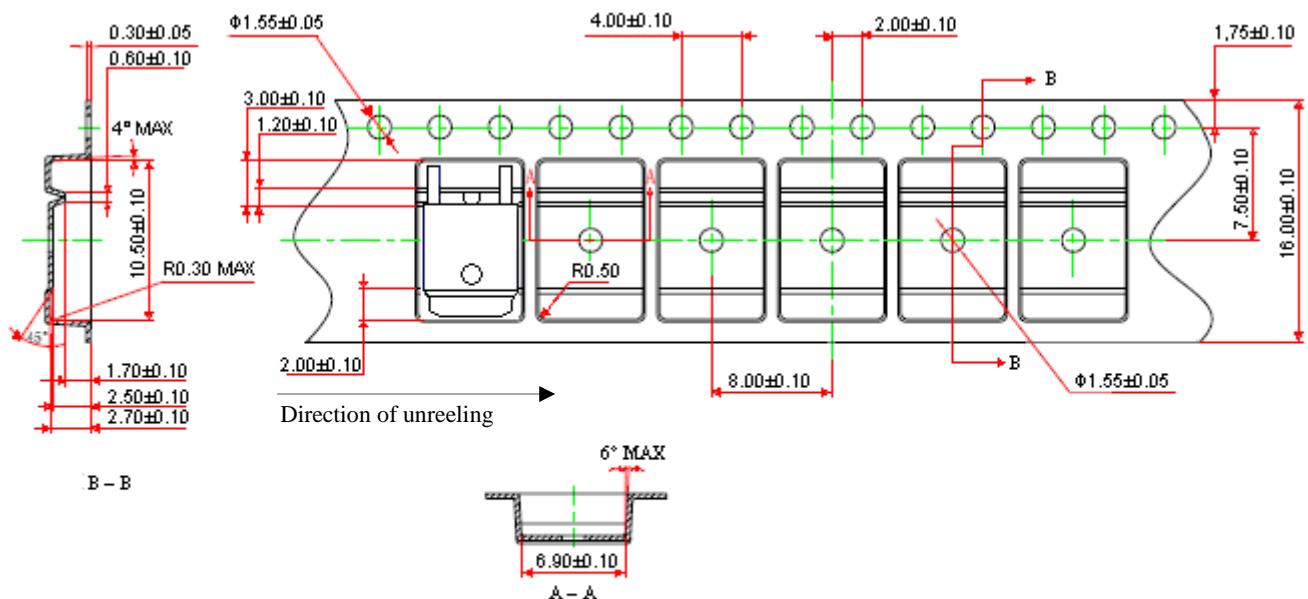


### Notes:

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.2$ .
2. Camber not to exceed 1mm in 100mm.
3. Material: conductive black polystyrene, antistatic coated:  $10^5 \Omega/\square \sim 10^{11} \Omega/\square$

unit : mm

## TO-252 Dimension

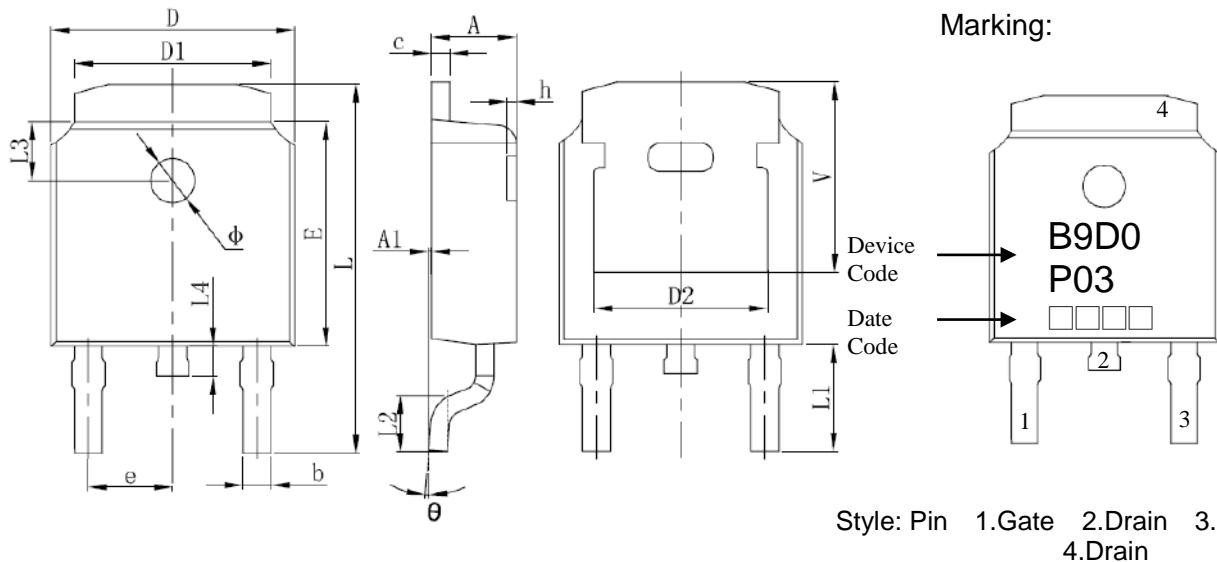

3-Lead TO-252 Plastic Surface Mount Package

Date Code(counting from left to right) :

1<sup>st</sup> code: year code, the last digit of Christian year

2<sup>nd</sup> code : month code, Jan→A, Feb→B, Mar→C, Apr→D

May→E, Jun→F, Jul→G, Aug→H, Sep→J,

Oct→K, Nov→L, Dec→M

3<sup>rd</sup> and 4<sup>th</sup> codes : production serial number, 01~99

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.087	0.094	2.200	2.400	L	0.382	0.406	9.712	10.312
A1	0.000	0.005	0.000	0.127	L1	0.114	REF	2.900	REF
b	0.025	0.030	0.635	0.770	L2	0.055	0.067	1.400	1.700
c	0.018	0.023	0.460	0.580	L3	0.063	REF	1.600	REF
D	0.256	0.264	6.500	6.700	L4	0.024	0.039	0.600	1.000
D1	0.201	0.215	5.100	5.460	Φ	0.043	0.051	1.100	1.300
D2	0.190	REF	4.830	REF	θ	0°	8°	0°	8°
E	0.236	0.244	6.000	6.200	h	0.000	0.012	0.000	0.300
e	0.086	0.094	2.186	2.386	v	0.207	REF	5.250	REF