


## 1.0 AMP FAST RECOVERY RECTIFIERS

### Features:

- \* Low forward voltage drop
- \* Low leakage current
- \* High reliability
- \* High current capability

### Mechanical Data:

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant method 208 guaranteed
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.34 grams
- \* Both normal and Pb free product are available:
- \* Normal: 80~95%Sn, 5~20%Pb
- \* Pb free: 99 Sn above can meet Rohs enviroment substance directive request

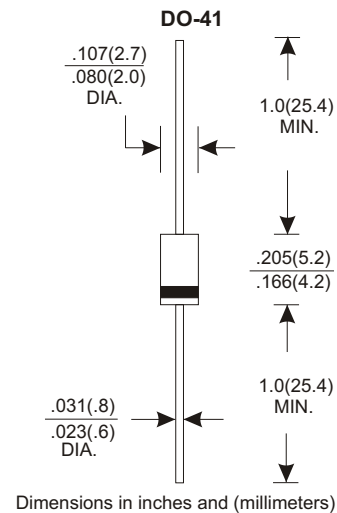

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25 °C ambient temperature unless otherwies specified.  
 Single phase half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


TYPE NUMBER	1N4933	1N4934	1N4935	1N4936	1N4937	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	V	
Maximum RMS Voltage	35	70	140	280	420	V	
Maximum DC Blocking Voltage	50	100	200	400	600	V	
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Ta=75°C						1.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)						30	A
Maximum Instantaneous Forward Voltage at 1.0A						1.2	V
Maximum DC Reverse Current Ta=25°C						5.0	uA
at Rated DC Blocking Voltage Ta=100°C						100	uA
Maximum Reverse Recovery Time (Note 1)						200	nS
Typical Junction Capacitance (Note 2)						15	pF
Operating and Storage Temperature Range Tj, TSTG						-65 — +150	°C

#### NOTES:


1. Reverse Recovery Time test condition:IF=1.0A, VR=30V.
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

**RATING AND CHARACTERISTIC CURVES (1N4933 THRU 1N4937)**


**FIG.1-TYPICAL FORWARD CHARACTERISTICS**

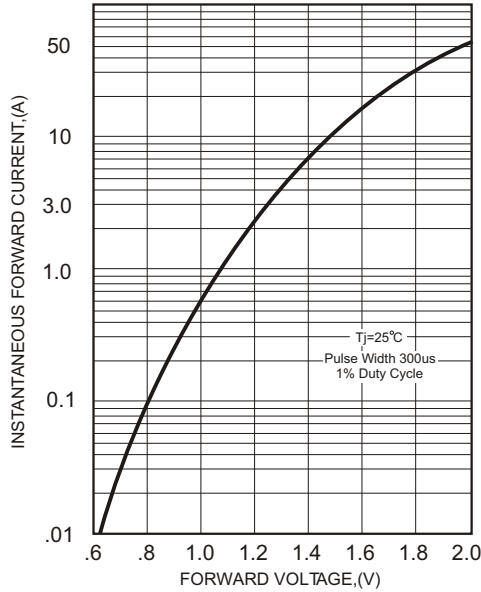


**FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE**

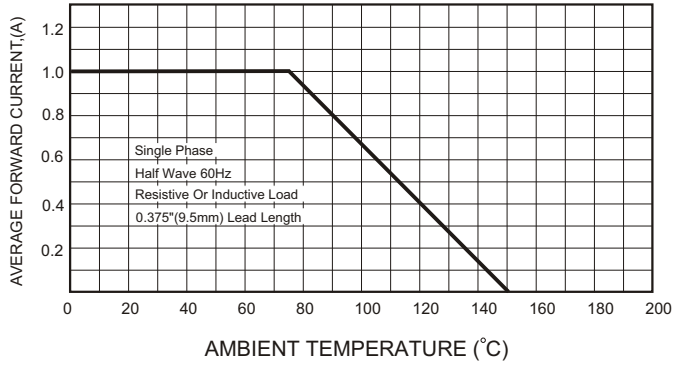

**FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

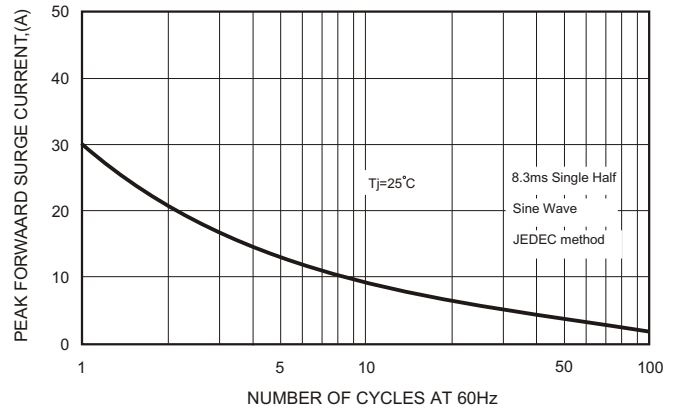


**FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS**

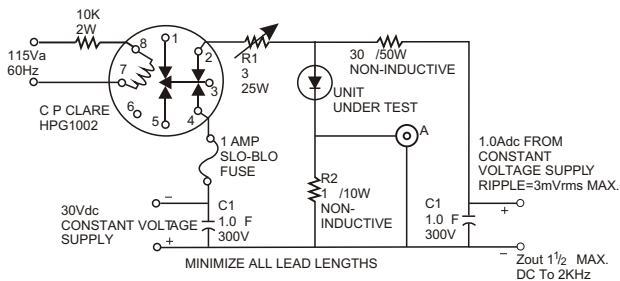

A-TEKTRONIX 545A, K PLUG IN PRE AMP P6000 PROBE OR EQUIVALENT  
 R1- ADJUSTED FOR 14 BETWEEN POINT 2 OF RELAY AND RECTIFIER INDUCTIVE=3.8 H

R2- TEN 1W 10 1% CARBON CORE IN PARALLEL  
 $T_A = 25 \begin{matrix} +10 \\ -0 \end{matrix} ^\circ\text{C}$  FOR RECTIFIER

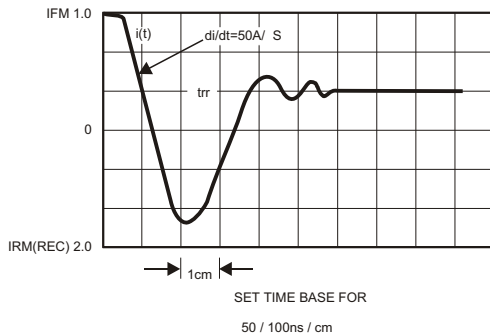

**FIG.5-TYPICAL JUNCTION CAPACITANCE**

