

# AUTOMOTIVE GENERAL PURPOSE RECTIFIER

Reverse Voltage - 1000 Volts  
 Forward Current - 1.0Amperes

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Stable,High temperature,Glass passivated junction
- -V suffix for Automative and other applications requiring unique site and control change requirments
- PPAP capable
- AEC-Q101 qualified
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU




**AEC-Q101 Qualified**

## SMAF

## MECHANICAL DATA

- Case: JEDEC SMAF molded plastic body
- Terminals: Solder Plated, solderable per MIL-STD-750,method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.002ounce, 0.064 gram

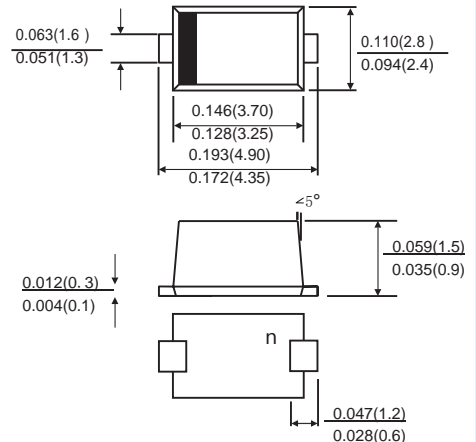

## TYPICAL APPLICATIONS

For use in high voltage rectifier,polarity protection,clamp applications

## MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified )

Parameters	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	1000	V
Maximum average forward rectified current	$I_{F(AV)}$	1.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	$I_{FSM}$	30	A
Operating junction temperature range	$T_J$	-55 to+150	°C
Storage temperature range	$T_{stg}$	-55 to+150	°C

## RATINGS AND CHARACTERISTIC OF M7F-V

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	Min.	Typ.	Max.	Unit
Breakdown voltage Blocking voltage	I <sub>R</sub> =10μA	T <sub>J</sub> =25°C	V <sub>BR</sub> V <sub>R</sub>	1150	-	-	V
		T <sub>J</sub> =-55°C		1000	-	-	
Instaneous forward voltage	I <sub>F</sub> =1.0A	T <sub>J</sub> =-40°C	V <sub>F</sub> <sup>1)</sup>	-	-	1.20	V
		T <sub>J</sub> =25°C		-	0.95	1.00	
		T <sub>J</sub> =125°C		-	0.85	-	
Reverse current	V <sub>R</sub> =1000V	T <sub>J</sub> =25°C	I <sub>R</sub> <sup>2)</sup>	-	-	2	μA
		T <sub>J</sub> =100°C		-	-	50	
		T <sub>J</sub> =125°C		-	-	250	
Junction capacitance	4V,1MHz		C <sub>J</sub>	-	15	-	pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width ≤ 40ms

### THERMAL CHARACTERISTICS

Parameter	Symbol	SMAF	Unit
Typical thermal resistance <sup>3)</sup>	R <sub>θJA</sub>	75.0	°C/W
	R <sub>θJL</sub> θ	27.0	

3. P.C.B. mounted with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

### AVAILABLE PACK INFORMATION

Product code	Pack	Reel Size (mm)	Quantity (pcs/reel)	Box Size LxWxH (mm)	Quantity (reel/box)	Carton Size LxWxH (mm)	Quantity (box/carton)
M7F-V	T/R	φ330	3000	180X73X180	2	364x364x200	10

# RATINGS AND CHARACTERISTIC OF M7F-V

FIG.1-FORWARD CURRENT DERATING CURVE

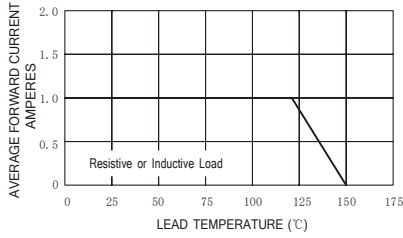


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

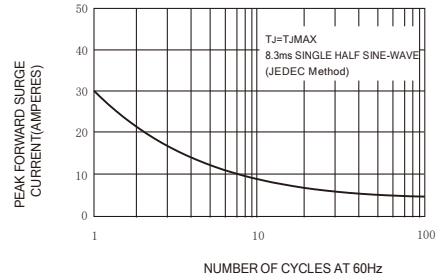


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

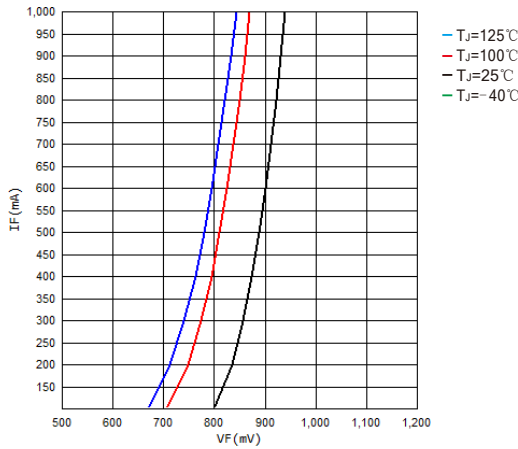


FIG.4-TYPICAL REVERSE CHARACTERISTICS

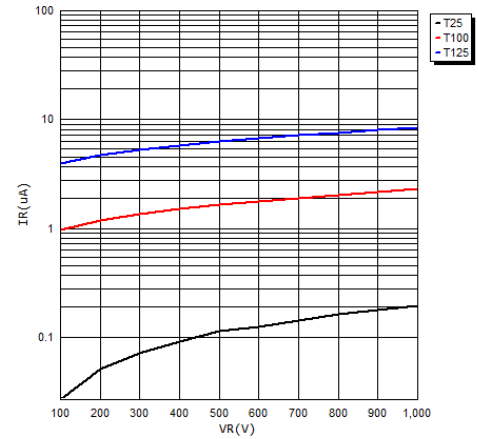


FIG.5-TYPICAL JUNCTION CAPACITANCE

