

# AUTOMOTIVE LOW VF SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 60 Volts

Forward Current -3.0Amperes

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2015/863 /EU
- AEC-Q101 qualified and PPAP capable

SMAF




AEC-Q101 Qualified

## MECHANICAL DATA

- Case: SMAF molded plastic body
- Terminals: Solder Plated, solderable per MIL-STD-750,method 2026
- Polarity: Color band denotes cathode end

SMAF



## TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

## MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified )

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	60	V
Maximum average forward rectified current (see fig.1)	I <sub>F(AV)</sub>	3.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I <sub>FSM</sub>	80	A
Operating junction temperature range	T <sub>J</sub>	-55 to+150	°C
Storage temperature range	T <sub>stg</sub>	-55 to+150	°C

## RATINGS AND CHARACTERISTIC OF KSS36LS-V

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	TYP.	MAX.	Unit
Instaneous forward voltage	I <sub>F</sub> =3.0A	T <sub>A</sub> =25°C	V <sub>F</sub> <sup>1)</sup>	0.48	0.52	V
		T <sub>A</sub> =100°C		0.44	-	
		T <sub>A</sub> =125°C		0.42	-	
Reverse current	V <sub>R</sub> =60V	T <sub>A</sub> =25°C	I <sub>R</sub> <sup>2)</sup>	60	100	μA
		T <sub>A</sub> =100°C		-	10	mA
		T <sub>A</sub> =125°C		-	30	
Typical junction capacitance	4V,1MHz		C <sub>J</sub>	240		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width≤40ms

### THERMAL CHARACTERISTICS

Parameter	Symbol	SMAF	Unit
Typical thermal resistance <sup>3)</sup>	θ R <sub>JA</sub>	150	°C/W
	θ R <sub>JL</sub>	28.0	

3.P.C.B. mounted with 0.118" x 0.118" (3.0 mm x 3.0 mm) copper pad areas (≥40μm thick)

### AVAILABALE PACK INFORMATION

Product code	Pack	Reel Size (mm)	Quantity (pcs/reel)	Box Size LxWxH (mm)	Quantity (reel/box)	Carton Size LxWxH (mm)	Quantity (box/carton)
KSS36LS-V -SMAF	T/R	Φ178	3000	180×180×105	6	550×200×205	5

## RATINGS AND CHARACTERISTIC OF KSS36LS-V

FIG.1-FORWARD CURRENT DERATING CURVE

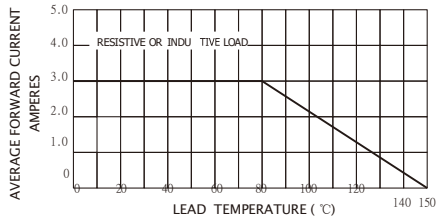


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

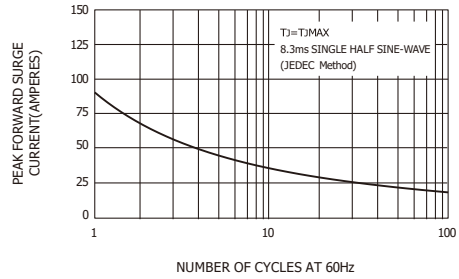


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

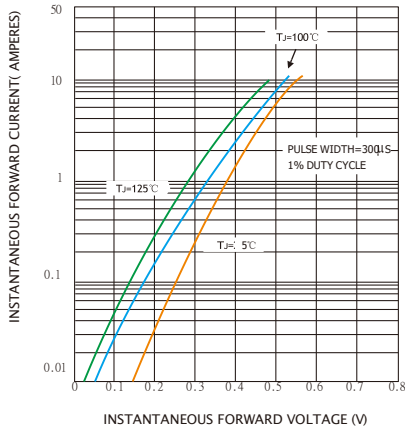


FIG.4-TYPICAL REVERSE CHARACTERISTICS



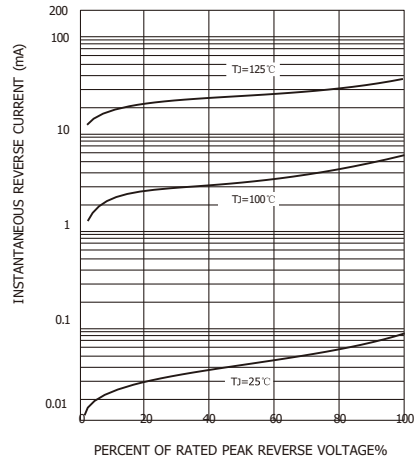



FIG.5-TYPICAL JUNCTION CAPACITANCE

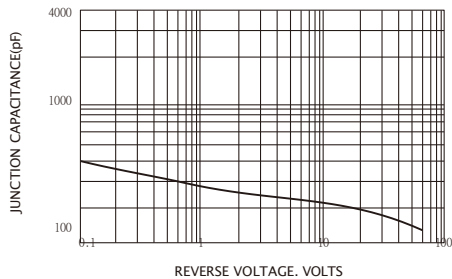

SMAF

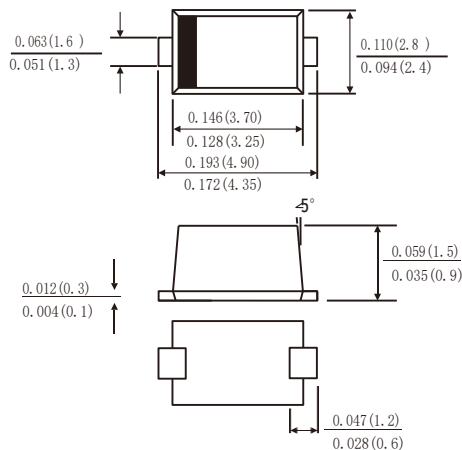


Marking



Marking:

xxxx: Tracing code  
 SS36LS-V: Type

Suggested PAD Layout

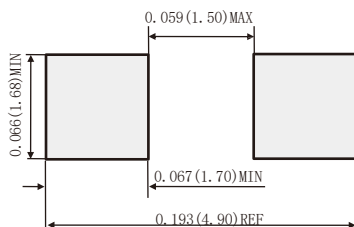

Dimensions in inches and (millimeters)