

AUTOMOTIVE LOW VF SCHOTTKY BARRIER

RECTIFIER Reverse Voltage - 60Volts
 Forward Current - 5.0Amperes

FEATURES



- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability , low forward voltage drop
- High surge capability
- Very low profile-typical height of 1.1mm
- Ideal for automated placement
- High temperature soldering guaranteed:260°C/10 seconds at terminals
 Component in accordance to RoHS 2015/863/EU
- AEC-Q101 qualified and PPAP capable



AEC-Q101 Qualified

MECHANICAL DATA

- Case: T0-277 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750, method 2026
- Mounting Position: Any
- Weight: 0.092 grams (approx)

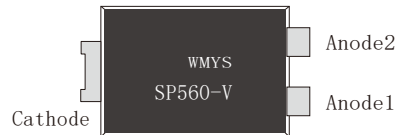

TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters,
 free wheeling , and polarity protection applications

MARKING:
 W-Work week
 M-Work month
 Y-Work year
 S-Assembly location
 SP560-Device code
 V-for automobile

MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	60	V
Maximum average forward rectified current	$I_{F(AV)}$	5.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	120	A
Operating junction temperature range	T_J	-55 to+150	°C
Storage temperature range	T_{stg}	-55 to+150	°C

RATINGS AND CHARACTERISTIC OF KW560-V

ELECTRICAL CHARACTERISTICS (T_A=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	Typ.	Max.	Unit
Instaneous forward voltage	T _J =25°C	I _F =5A	V _F 1)	0.59	0.64	V
		I _F =2.5A		0.49	-	
	T _J =125°C	I _F =5A		0.53	-	
		I _F =2.5A		0.43	-	
Reverse current	V _R =60V	T _J =25°C	I _R 2)	-	100	μA
		T _J =125°C		5.0	-	mA
Typical junction capacitance	4V,1MHz		C _J	190		pF

Notes: 1.Pulse test: 300 μs pulse width, 1% duty cycle

2.Pulse test: pulse width≤40ms

THERMAL CHARACTERISTICS

Parameter	Symbol	TO-277	Unit
Typical thermal resistance 3)	R _{JJA} 4)	60.0	°C/W
	R _{JL}	3.0	

3 Units mounted on recommended PCB 1 oz. Pad layout

4 The heat generated must be less than thermal conductivity from junction to ambient: dPb/dt_J<1/R_{JJA}

AVAILABALE PACK INFORMATION

Product code	Pack	Carton Size L×W×H(mm)	Inner Box Size L×W×H(mm)	Reel diamet (mm)	Inner Box Number	Reel Number Per A Inner Box	Part Number Per A Reel (K)	Quantity(carton) (K)
KW560-V TO-277	Reel	370×370×360	338×338×39	φ 330	7	2	5	70

RATINGS AND CHARACTERISTIC OF KW560-V

FIG.1-FORWARD CURRENT DERATING CURVE

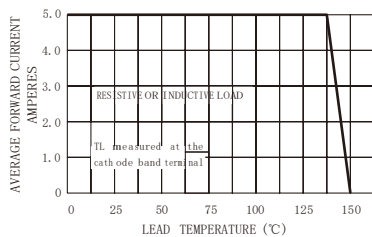


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

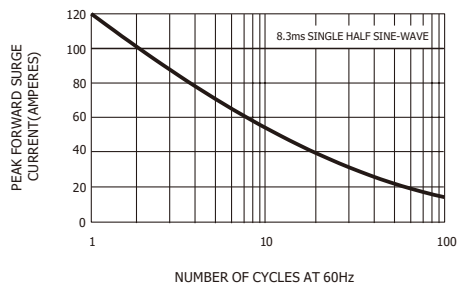


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

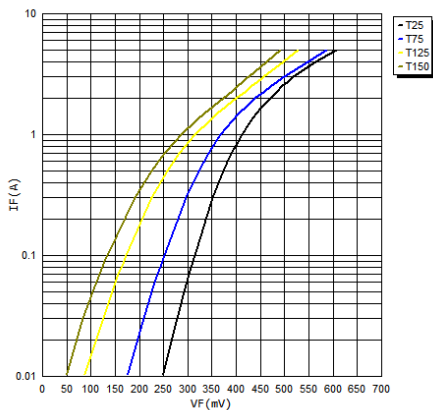


FIG.4-TYPICAL REVERSE CHARACTERISTICS



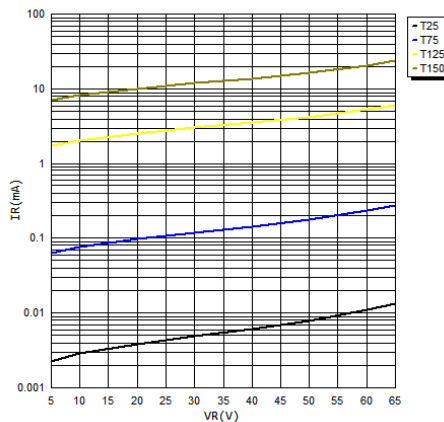


FIG.5-TYPICAL JUNCTION CAPACITANCE

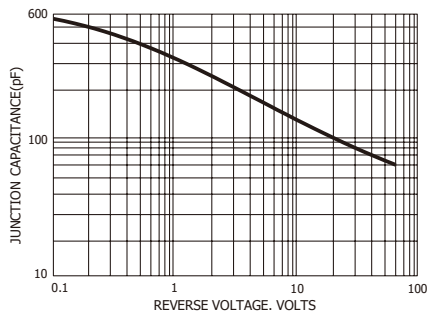


PACKAGE OUTLINE DIMENSIONS

TO-277

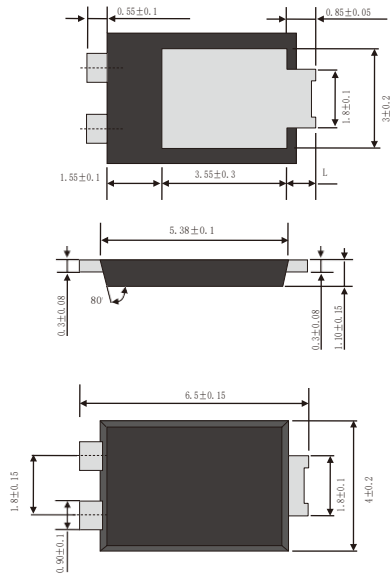

Suggested Pad

TO-277 foot print



A	B	C	D	E	F	G
0.185 (4.70)	0.142 (3.60)	0.152 (3.87)	0.260 (6.60)	0.055 (1.40)	0.035 (0.90)	0.031 (0.80)

Dimensions in inches and (millimeters)