


General Purpose PNP Epitaxial Planar Transistor


SOT-89

Features:

- High breakdown voltage, $BV_{CEO} \geq -80V$
- Large continuous collector current capability
- Low collector saturation voltage
- Complementary to BCX56M3
- Pb-free lead plating package



KMBCX53

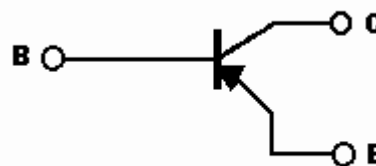

B : Base
C : Collector
E : Emitter

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Collector-Base Voltage	V_{CBO}	-100	V
Collector-Emitter Voltage	V_{CEO}	-80	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current(DC)	I_C	-1	A
Collector Current(Pulse)	I_{CP}	-1.5	A
Power Dissipation	P_d	0.6	W
		1 (Note 1)	W
		2 (Note 2)	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55~+150	°C

Note : 1. When mounted on FR-4 PCB with area measuring 10×10×1 mm

2 . When mounted on ceramic with area measuring 40×40×1 mm

Characteristics (Ta=25°C)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV _{CBO}	-100	-	-	V	I _C =-100μA
BV _{CEO}	-80	-	-	V	I _C =-10mA
BV _{EBO}	-5	-	-	V	I _E =-10μA
I _{CBO}	-	-	-100	nA	V _{CB} =-80V
I _{EBO}	-	-	-20	nA	V _{EB} =-4V
*V _{CE(sat)}	-	-0.16	-0.5	V	I _C =-500mA, I _B =-50mA
*V _{BE(on)}	-	-	-1	V	V _{CE} =-2V, I _C =-500mA
*h _{FE} 1	100	-	-	-	V _{CE} =-2V, I _C =-5mA
*h _{FE} 2	100	-	400	-	V _{CE} =-2V, I _C =-150mA
*h _{FE} 3	40	-	-	-	V _{CE} =-2V, I _C =-500mA
f _T	150	-	-	MHz	V _{CE} =-10V, I _C =-50mA, f=100MHz
Cob	-	-	25	pF	V _{CB} =-10V, I _E =0A, f=1MHz

*Pulse Test: Pulse Width ≤380μs, Duty Cycle ≤2%

Classification Of h_{FE} 2


Rank	16	25
Range	100~250	160~400

Ordering Information


Device	Package	Shipping	Marking
KMBCX53	SOT-89 (Pb-free)	1000 pcs / Tape & Reel	AK

Characteristic Curves


Current Gain vs Collector Current

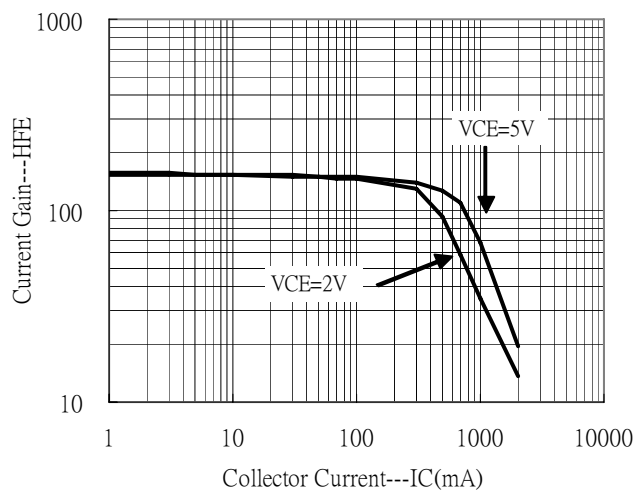


Saturation Voltage vs Collector Current

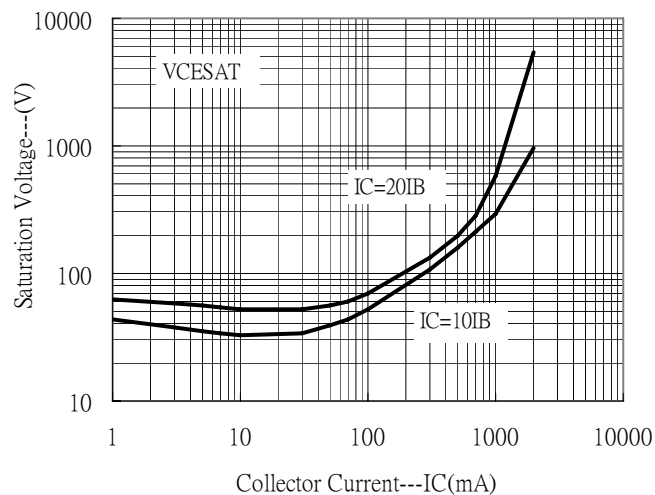


Saturation Voltage vs Collector Current

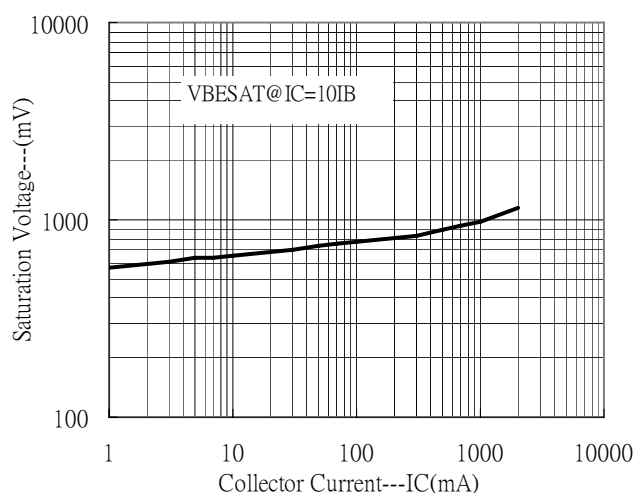


On Voltage vs Collector Current

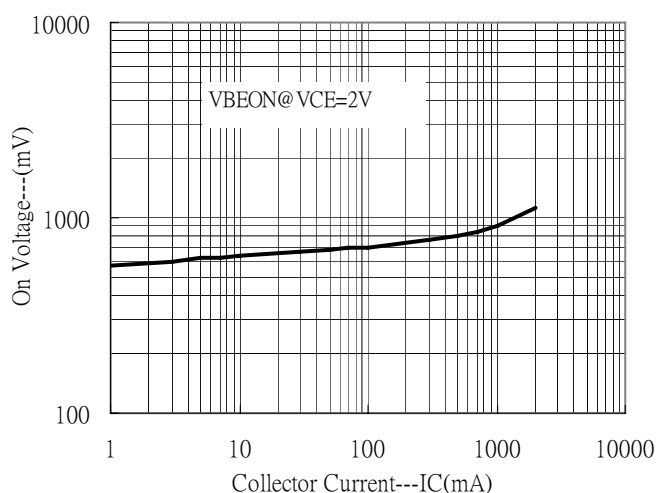


Power Derating Curves

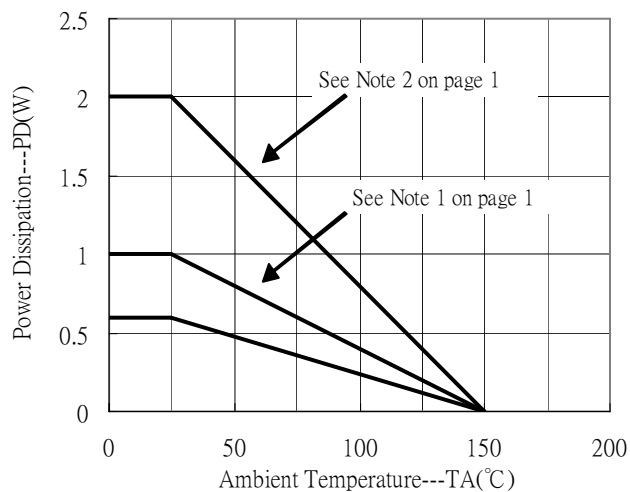

Reel Dimension

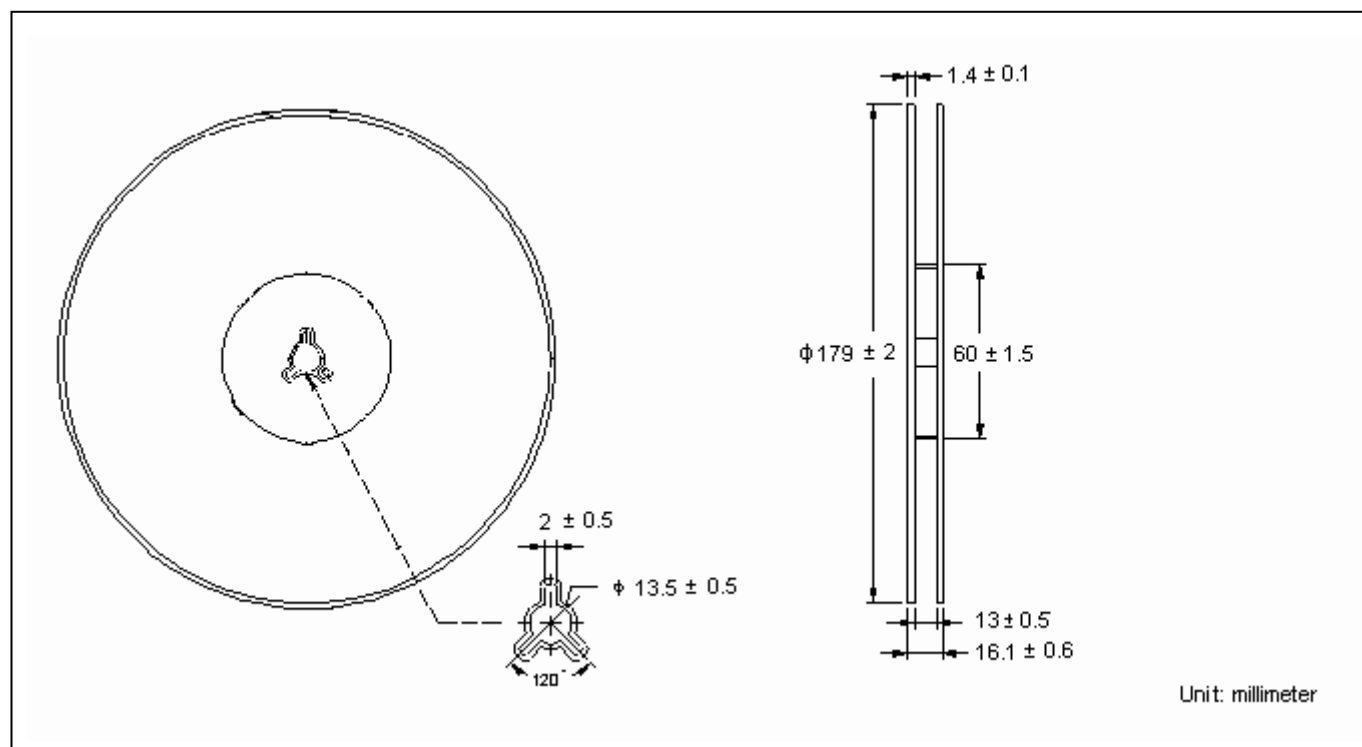


Carrier Tape Dimension

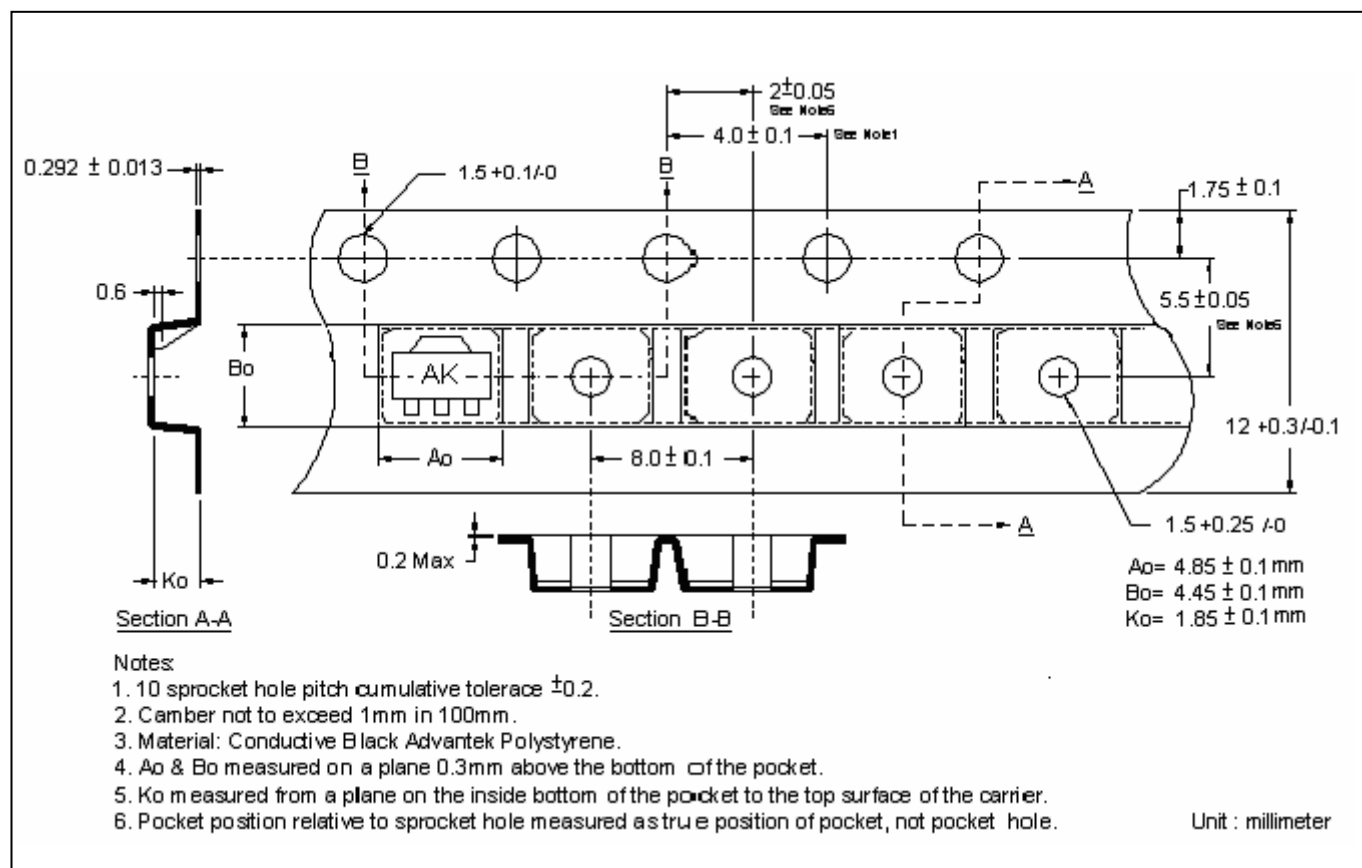

Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow

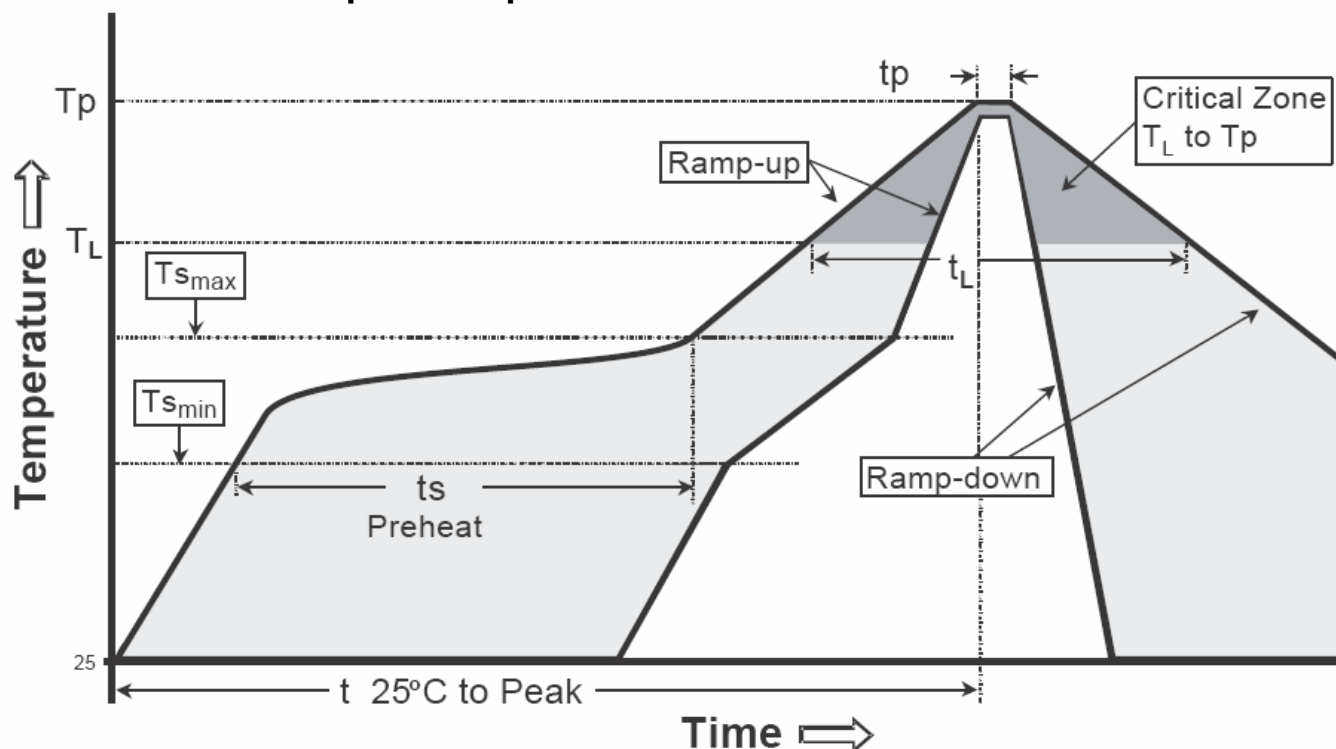

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(Ts min)	100°C	150°C
-Temperature Max(Ts max)	150°C	200°C
-Time(ts min to ts max)	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (Tl)	183°C	217°C
- Time (tL)	60-150 seconds	60-150 seconds
Peak Temperature(Tp)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

SOT-89 Dimension

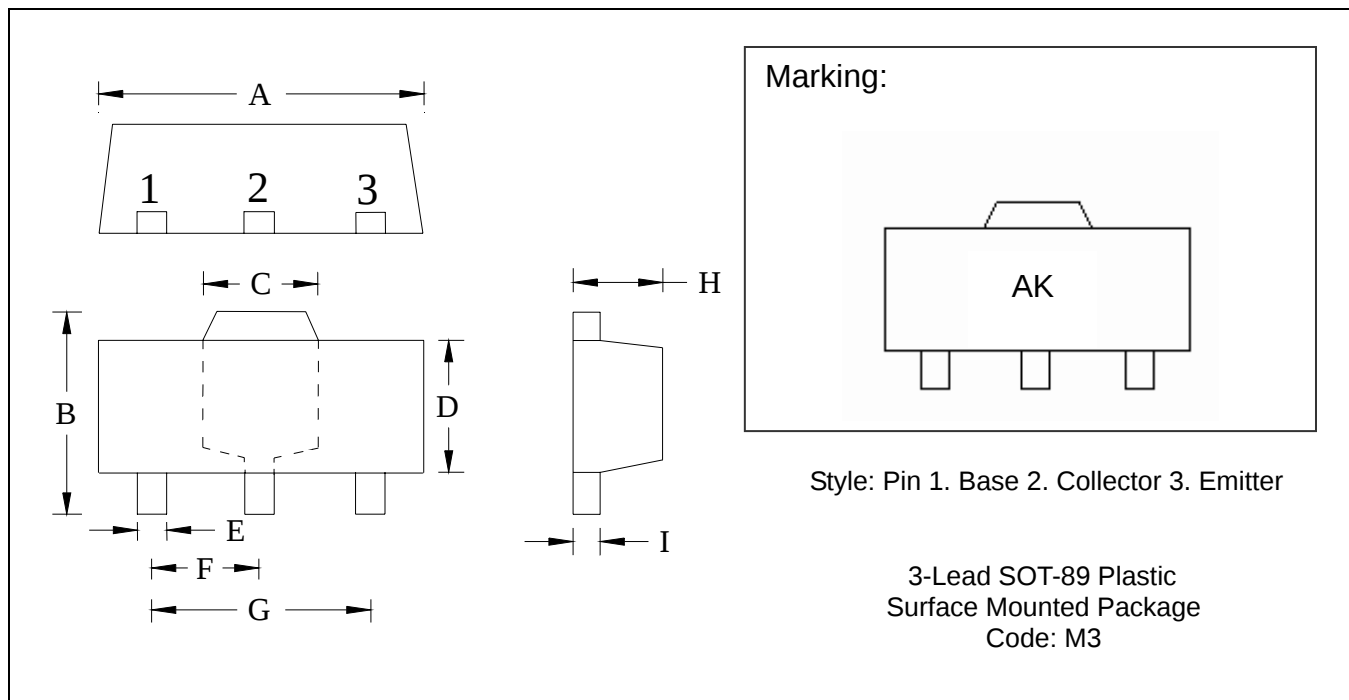

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.1732	0.1811	4.40	4.60	F	0.0591	TYP	1.50	TYP
B	0.1551	0.1673	3.94	4.25	G	0.1181	TYP	3.00	TYP
C	0.0610	REF	1.55	REF	H	0.0551	0.0630	1.40	1.60
D	0.0906	0.1024	2.30	2.60	I	0.0138	0.0173	0.35	0.44
E	0.0126	0.0205	0.32	0.52					