


General Purpose NPN Epitaxial Planar Transistor

Features:

- High breakdown voltage, $BV_{CEO} \geq 100V$
- Large continuous collector current capability
- Low collector saturation voltage
- Pb-free lead plating and halogen-free package


Outline

SOT-23



Symbol

KWC2880N3

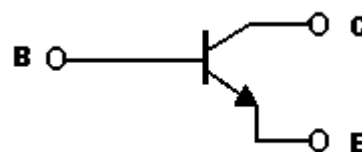

B : Base
 C : Collector
 E : Emitter

Ordering Information

Device	Package	Shipping
KWC2880N3	SOT-23 (Pb-free lead plating and halogen-free package)	3000 pcs / Tape & Reel

Absolute Maximum Ratings (Ta=25°C)







Parameter	Symbol	Limits	Unit
Collector-Base Voltage	V _{CBO}	180	V
Collector-Emitter Voltage	V _{CEO}	100	V
Emitter-Base Voltage	V _{EBO}	7	V
Collector Current	I _C	2	A
Peak Collector Current	I _{CM}	5	A
Base Current	I _B	0.4	A
Power Dissipation	P _D	225	mW
Thermal Resistance, Junction to Ambient	R _{θJA}	556	°C/W
Operating Junction and Storage Temperature Range	T _j ; T _{stg}	-55~+150	°C

Characteristics (Ta=25°C)


Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV _{CBO}	180	-	-	V	I _C =50μA
BV _{CEO}	100	-	-	V	I _C =1mA
BV _{EBO}	7	-	-	V	I _E =50μA
I _{CBO}	-	-	100	nA	V _{CB} =180V
I _{EBO}	-	-	100	nA	V _{EB} =6V
*V _{CE(sat)}	-	0.11	0.2	V	I _C =500mA, I _B =50mA
*V _{CE(sat)}	-	0.22	0.4	V	I _C =1A, I _B =50mA
*V _{CE(sat)}	-	0.44	1	V	I _C =2A, I _B =100mA
*V _{BE(sat)}	-	0.85	1.2	V	I _C =500mA, I _B =50mA
*V _{BE(on)}	-	0.77	0.9	V	V _{CE} =5V, I _C =500mA
*h _{FE} 1	120	-	-	-	V _{CE} =5V, I _C =50mA
*h _{FE} 2	150	-	250	-	V _{CE} =5V, I _C =100mA
*h _{FE} 3	80	-	-	-	V _{CE} =5V, I _C =1A
f _T	50	-	-	MHz	V _{CE} =10V, I _C =50mA, f=100MHz
Cob	-	18	40	pF	V _{CB} =10V, I _E =0A, f=1MHz

*Pulse Test: Pulse Width ≤380μs, Duty Cycle≤2%

Typical Characteristics

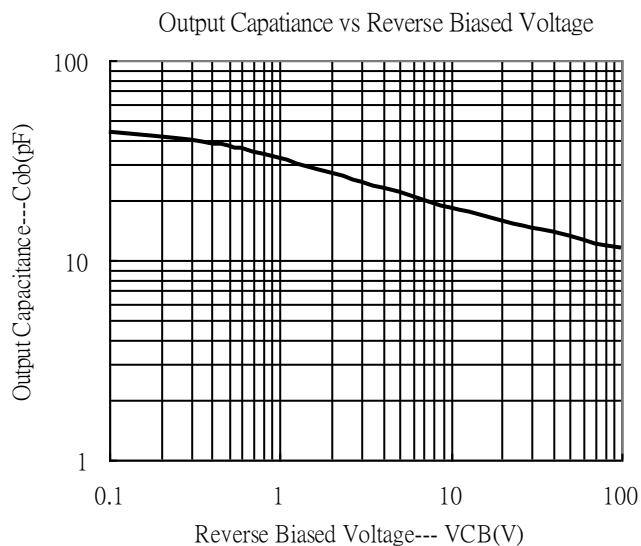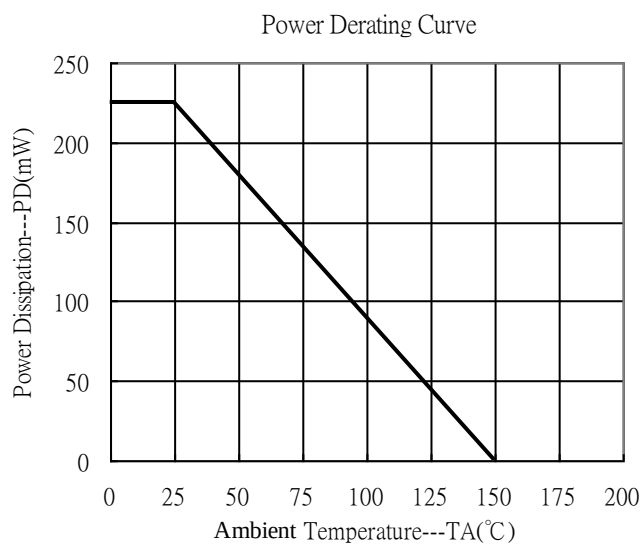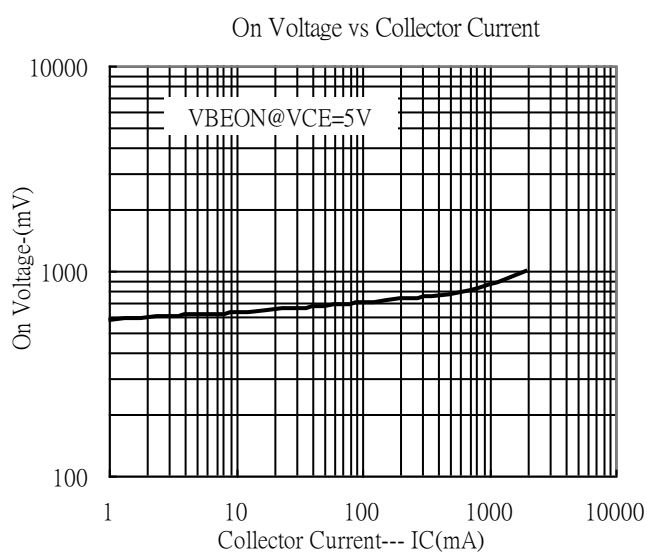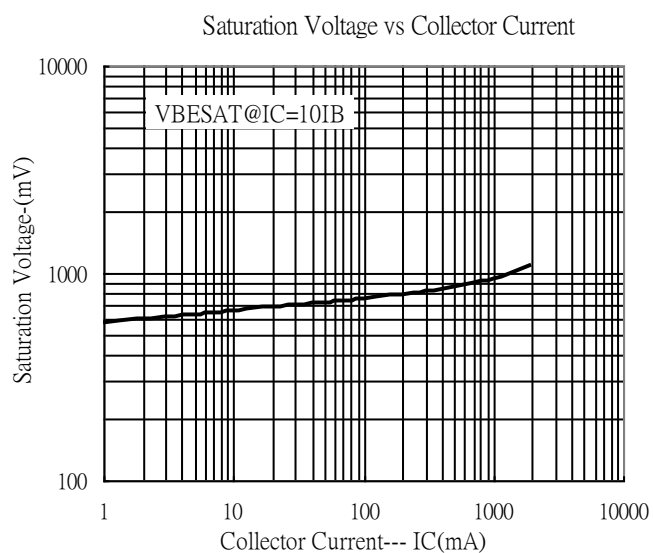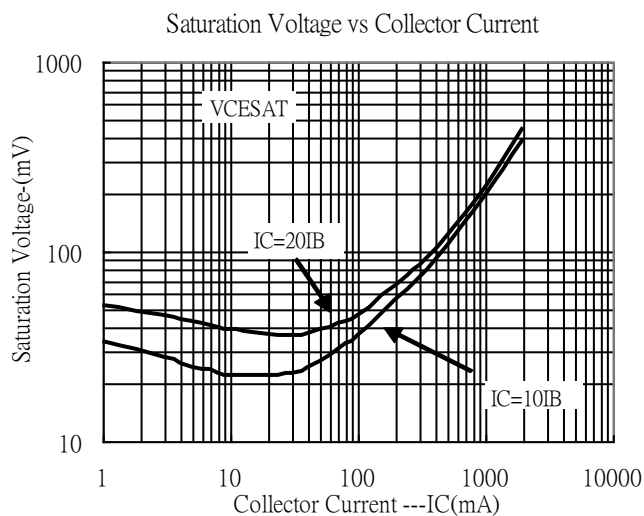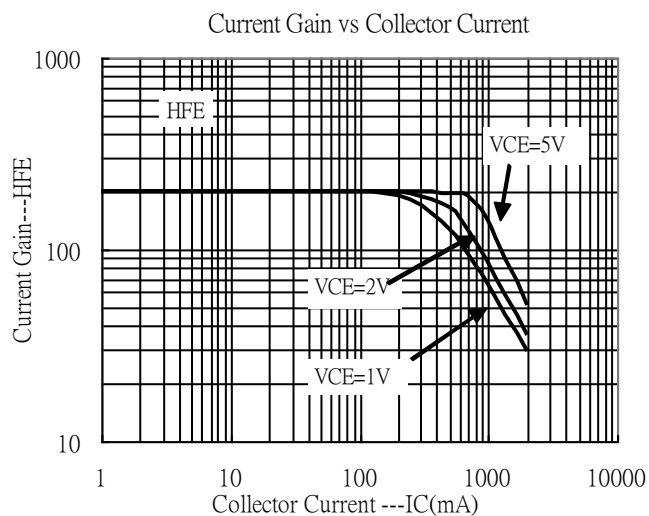


Recommended Soldering Footprint

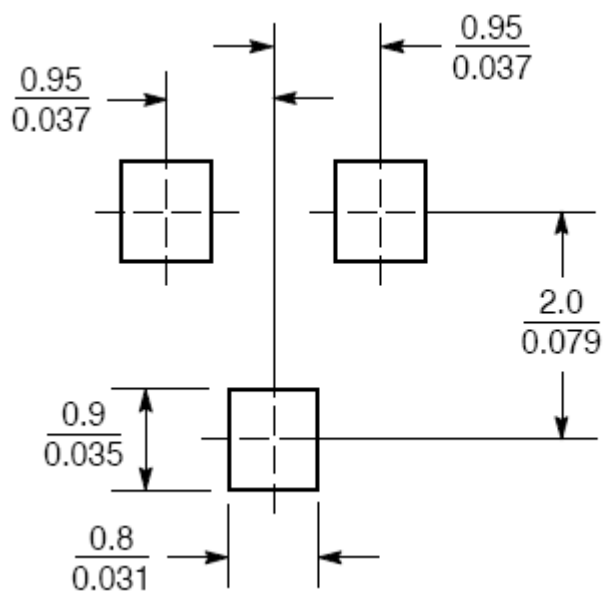

Unit : $\frac{\text{mm}}{\text{inches}}$

SOT-23 Dimension

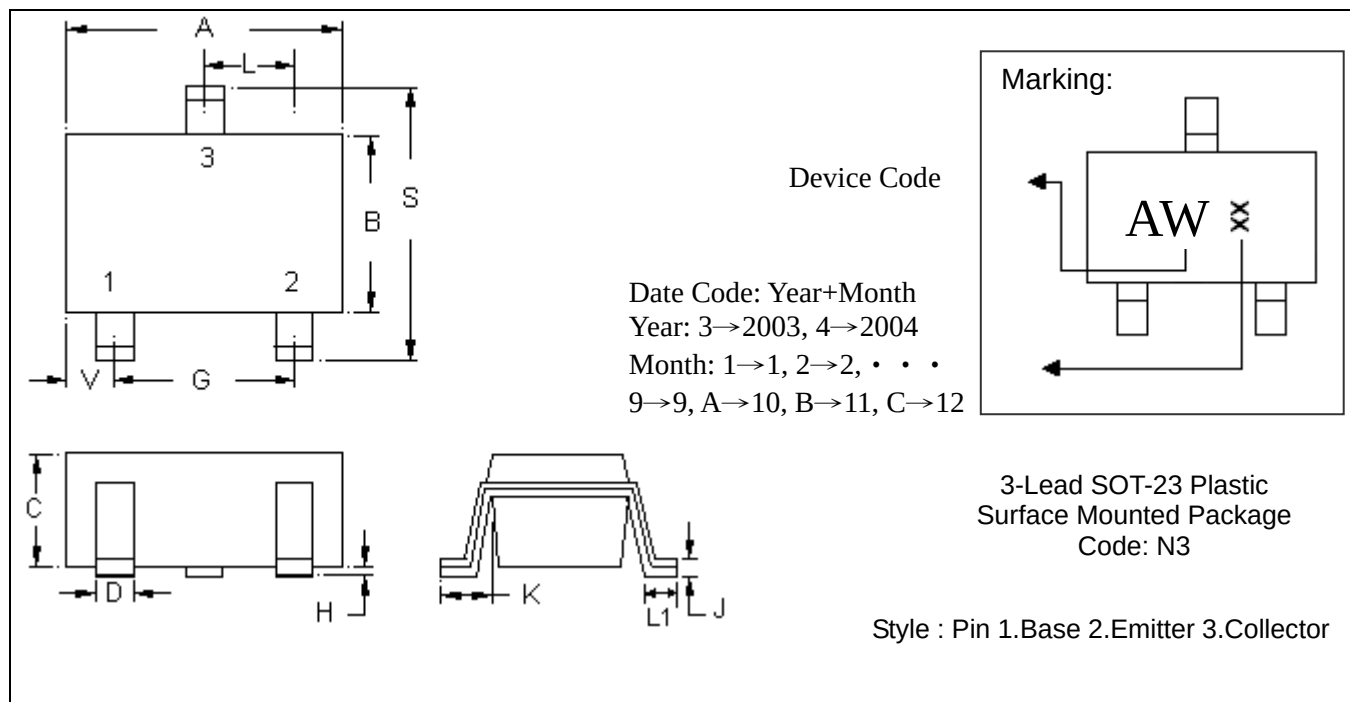

*:Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.1102	0.1204	2.80	3.04	J	0.0032	0.0079	0.08	0.20
B	0.0472	0.0669	1.20	1.70	K	0.0118	0.0266	0.30	0.67
C	0.0335	0.0512	0.89	1.30	L	0.0335	0.0453	0.85	1.15
D	0.0118	0.0197	0.30	0.50	S	0.0830	0.1161	2.10	2.95
G	0.0669	0.0910	1.70	2.30	V	0.0098	0.0256	0.25	0.65
H	0.0000	0.0040	0.00	0.10	L1	0.0118	0.0197	0.30	0.50