

TO- 277 Plastic-Encapsulate Diodes

Schottky Rectifier Diode

Features:

- $I_{F(AV)}$ 15A
- V_{RRM} 120V
- High surge current capability
- Low peak forward voltage



Applications:

- Rectifier

Marking

- SB15120L

TO-277



Limiting Values(Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	KSB15120L
Repetitive Peak Reverse Voltage	V_{RRM}	V		120
Maximum RMS Voltage	V_{RMS}	V		85
Maximum DC Blocking Voltage	V_{DC}	V		120
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave, Resistance load, $T_L=100^{\circ}C$	15
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz Half-sine wave, 1 cycle, $T_a=25^{\circ}C$	250
Junction Temperature	T_J	$^{\circ}C$		-55 ~ +150
Storage Temperature	T_{STG}	$^{\circ}C$		-55 ~ +150

Electrical Characteristics (T=25 $^{\circ}C$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition		KSB15120L	
Peak Forward Voltage	V_F	V	$I_F=15.0A$	$T_a=25^{\circ}C$	0.74(TYP)	0.78(MAX)
				$T_a=125^{\circ}C$	0.67(TYP)	0.70(MAX)
Peak Reverse Current	I_{RRM1}	mA	$V_{RM}=V_{RRM}$	$T_a=25^{\circ}C$	0.015(TYP)	0.05(MAX)
	I_{RRM2}			$T_a=125^{\circ}C$	6(TYP)	10(MAX)
Thermal Resistance(Typical)	$R_{\theta J-A}$	$^{\circ}C/W$	Between junction and ambient		110	
	$R_{\theta J-L}$		Between junction and terminal		3	

Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

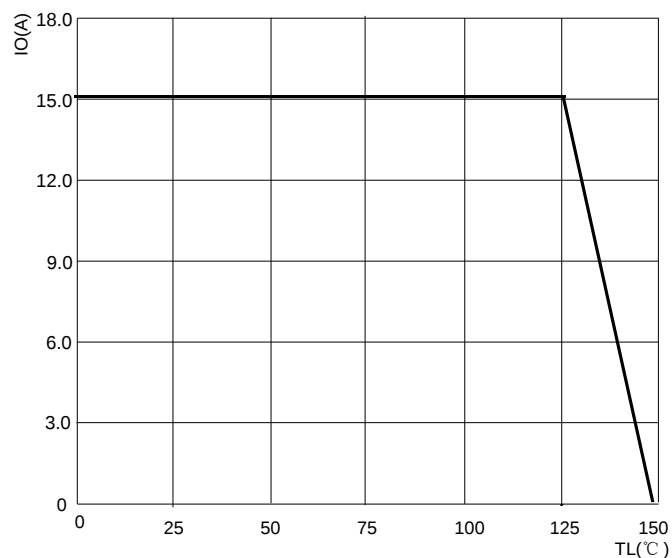


FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

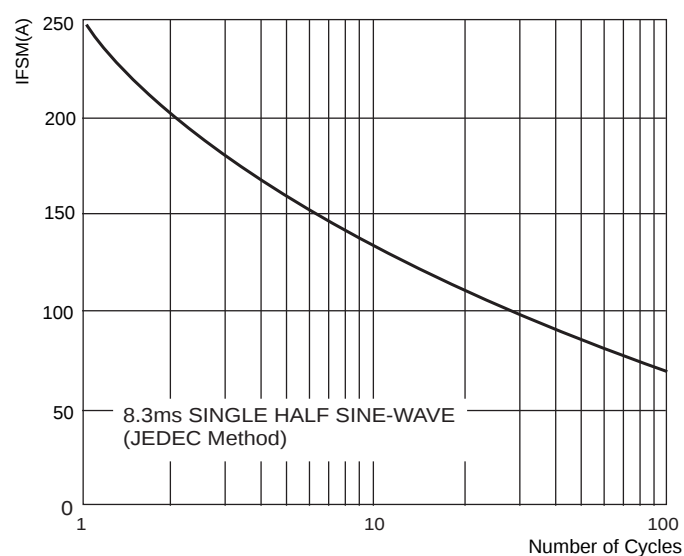


FIG3: Instantaneous Forward Voltage



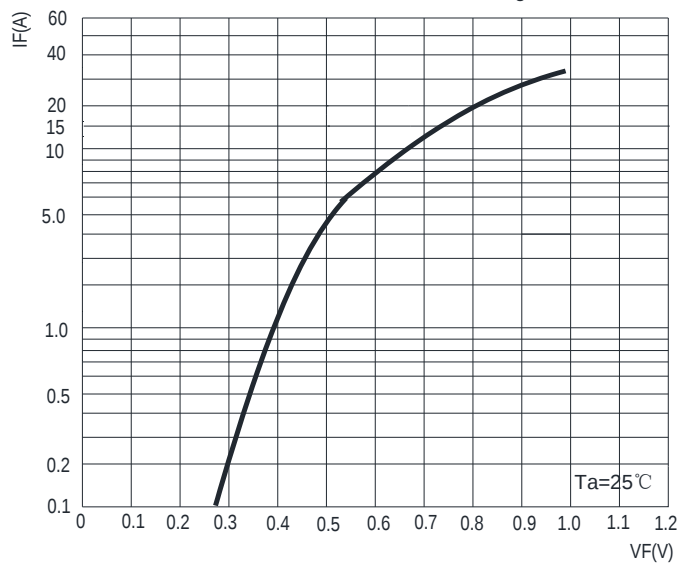


FIG.4: TYPICAL REVERSE CHARACTERISTICS

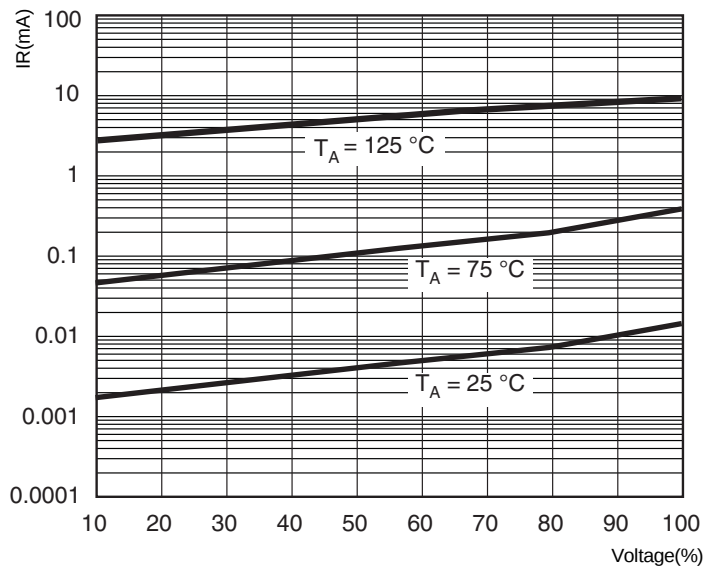


TO- 277 Package Outline Dimensions

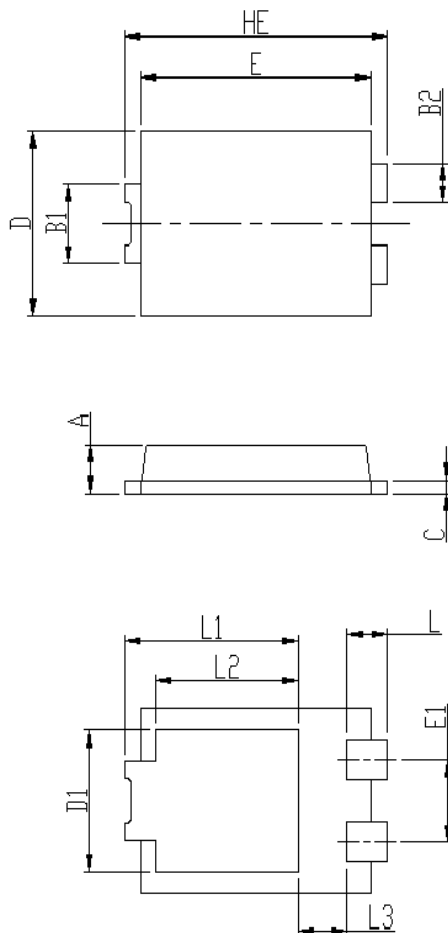

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
HE	6.4	6.6	0.252	0.260
E	5.6	5.8	0.220	0.228
D	4.	4.	0. 61	0. 69
B1	1.7	1.9	0.067	0.075
B2	0.8	1	0.031	0.039
A	1.05	1.2	0.041	0.047
C	0.3	0.4	0.012	0.016
L	0.85	1.1	0.033	0.043
L1	4.2	4.4	0.165	0.173
L2	3.52 Typ.		0.139 Typ.	
L3	1.1	1.4	0.043	0.055
D1	3	3.3	0.118	0.130
E1	1.86 Typ.		0.073 Typ.	

TO- 277 Suggested Pad Layout

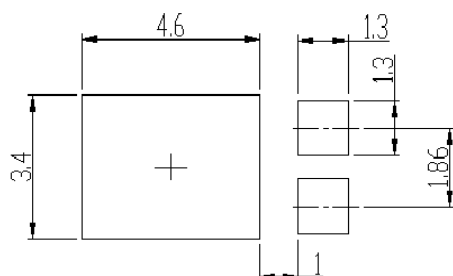

Note:

- 1.Controlling dimension:in millimeters.
- 2.General tolerance:± 0.05mm.
- 3.The pad layout is for reference purposes only.


TO-277 系列（卷盤）

單位：mm

項目	卷盤	中盒	外箱
尺寸 (mm)	Φ330	338×338×39	370×370×360
數量 (只)	5K	5K×2(卷)=10K	5K×2(卷) ×7 (盒) =70K

載帶：

Embossed Carrier Tape

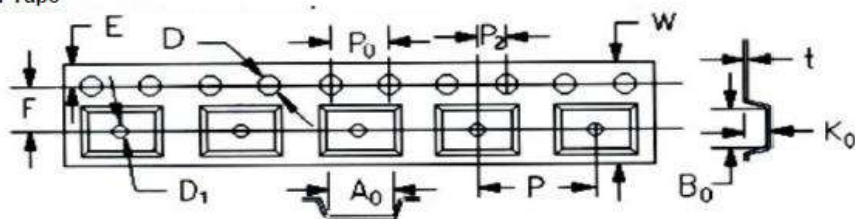

尺寸規格	P2	F	E	A0	B0	K0	P1	P0	W	D0
公差mm	2.0±0.07	7.5±0.1	1.75±0.1	4.38±0.1	6.9±0.1	4.0±0.1	8.0±0.07	4.0±0.07	16±0.2	1.55±0.05

卷盤(mm):

