


GLASSPASSIVATED D BRIDGE RECTIFIERS

Features:

- Glass passivated chip junction
 - High case dielectric strength
 - High surge current capability
- Ideal for printed circuit board

Mechanical Data:

- Terminal: Plated leads solderable per MIL-STD 202E, Method 208C
- Case: UL-94 Class V-0 recognized Flame Retardant Epoxy
- Polarity: Polarity symbol marked on body
- Mounting position: any
- Lead Free Finish/RoHS Compliant

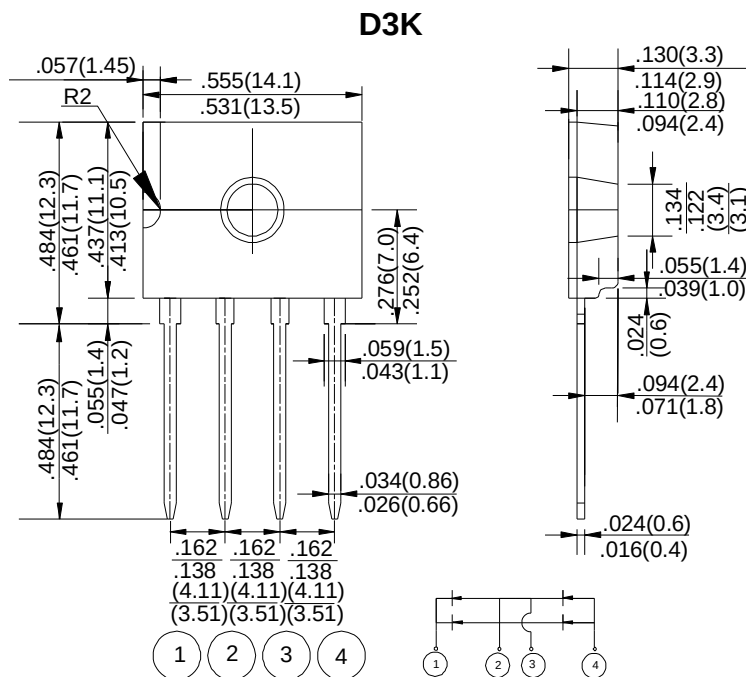

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	D4KB05	D4KB1	D4KB2	D4KB4	D4KB6	D4KB8	D4KB10	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current @ T _c =138°C (with heatsink)	I _{AV}	4							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}	135							A
Maximum Forward Voltage at 2.0A DC	V _F	1.1							V
I ² t Rating for Fusing (t<8.3ms)	I ² t	64.84							A ² s
Typical Thermal Resistance	R _θ	55							°C/W
without heatsink	R _{θJA}	55							
with heatsink	R _{θJC}	1.5							
without heatsink	R _{θJL}	15							
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	10.0							μA
@ T _a =25°C		500							
@ T _a =125°C									
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

RATING AND CHARACTERISTIC CURVES D4KB05 thru D4KB10

FIG.1-DERATING CURVE OUTPUT
RECTIFIED CURRENT

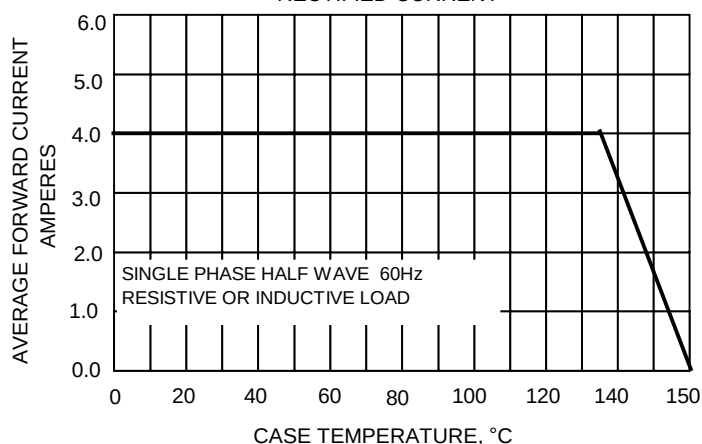


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

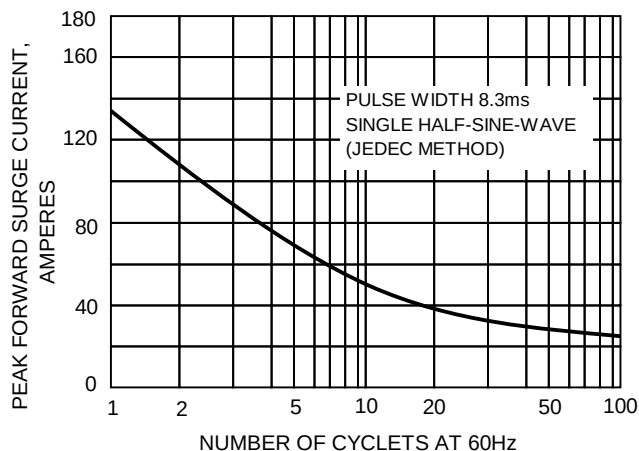


FIG.3-TYPICAL JUNCTION CAPACITANCE

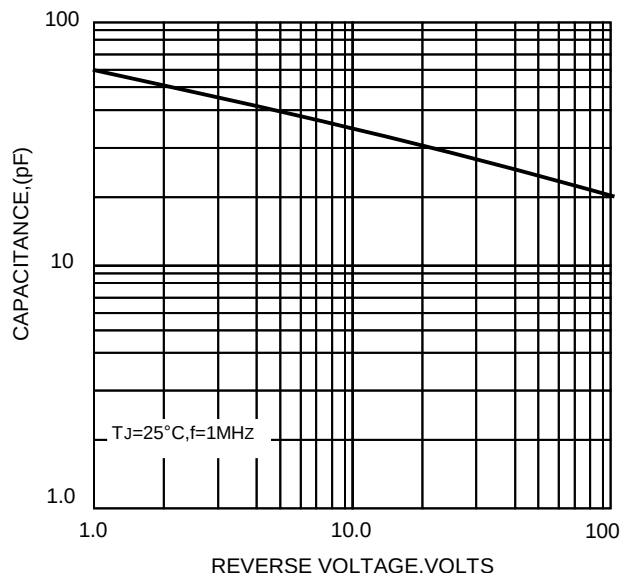


FIG.3-TYPICAL FORWARD CHARACTERISTICS

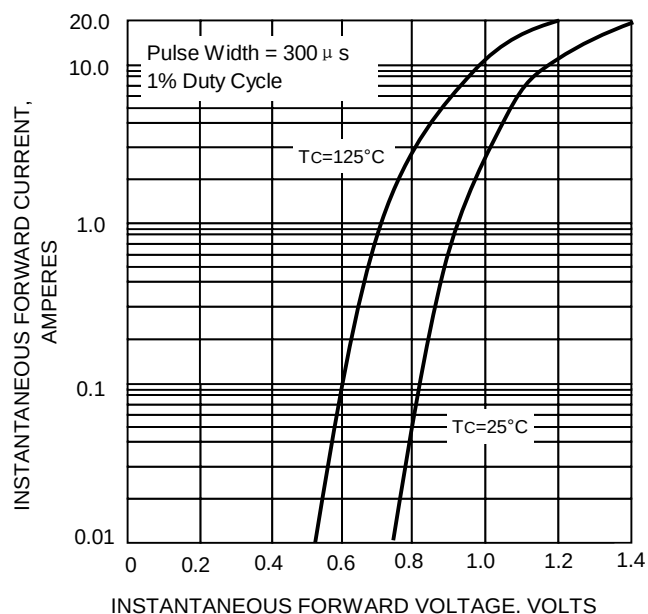


FIG.5-TYPICAL REVERSE CHARACTERISTICS

