

GBU Plastic-Encapsulate Bridge Rectifier

General Purpose Bridge Rectifier

Features

- I_O 10A
- V_{RRM} 50V-1000V
- High surge current capability
- Glass passivated chip



Applications

- General purpose 1 phase Bridge rectifier applications

Marking

- GBU10XX
- XX : From 005L To 10L

GBU



Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	GBU10						
				005L	01L	02L	04L	06L	08L	10L
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V		35	70	140	280	420	560	700
Average Rectified Output Current	I_O	A	60Hz sine wave, R-load	With heatsink $T_c = 80^\circ C$						
				Without heatsink $T_a = 25^\circ C$						
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz sine wave, 1 cycle, $T_j = 25^\circ C$	220						
Current Squared Time	I^2t	A^2S	$1ms \leq t < 8.3ms$ $T_j = 25^\circ C$, Rating of per diode	250						
Storage Temperature	T_{stg}	$^\circ C$		-55 ~ +150						
Junction Temperature	T_j	$^\circ C$		-55 ~ +150						
Dielectric Strength	V_{dis}	KV	Terminals to case, AC 1 minute	2						
Mounting Torque	Tor	kg • cm	Recommend torque: 5kg • cm	8						

Electrical Characteristics ($T_a = 25^\circ C$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	Max
Peak Forward Voltage	V_{FM}	V	$I_{FM} = 5A$, Pulse measurement, Rating of per diode	0.92
Peak Reverse Current	I_{RRM}	μA	$V_{RM} = V_{RRM}$, Pulse measurement, Rating of per diode	10
Thermal Resistance	$R_{\theta J-A}$	$^\circ C/W$	Between junction and ambient, Without heatsink	25
	$R_{\theta J-C}$		Between junction and case, With heatsink	2.3

Typical Characteristics

FIG.1-MAXIMUM FORWARD SURGE CURRENT

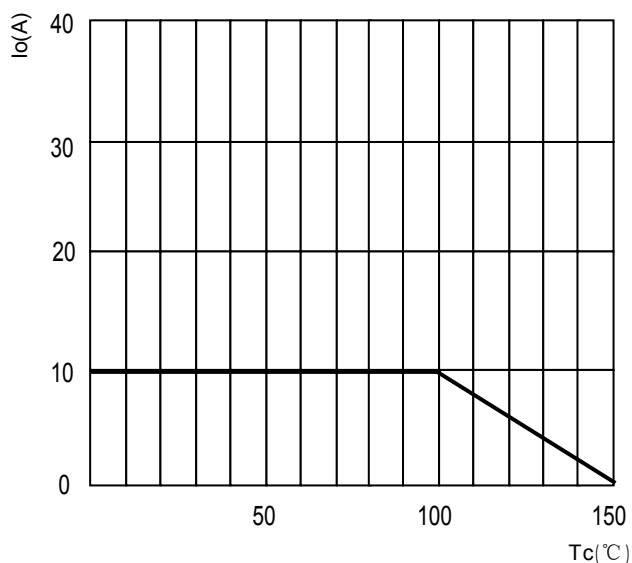


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

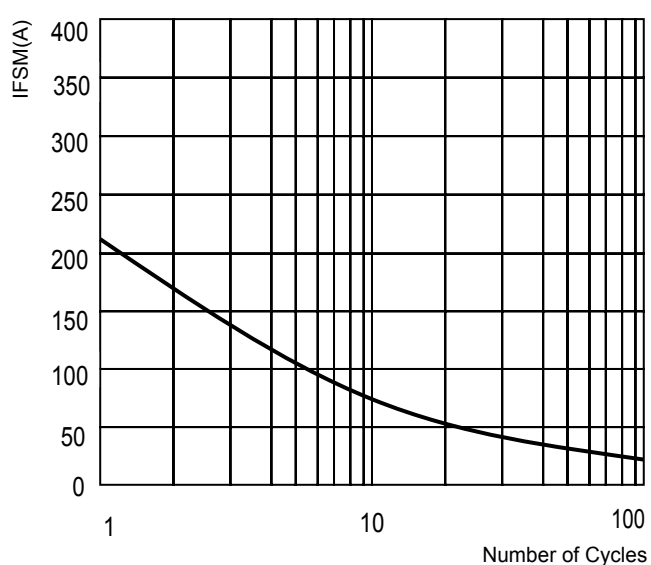


FIG.3-TYPICAL FORWARD CHARACTERISTICS



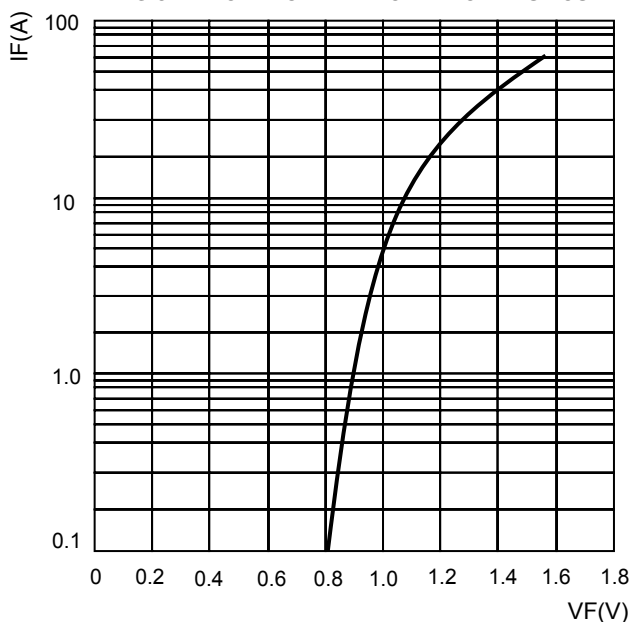


FIG.4-TYPICAL REVERSE CHARACTERISTICS

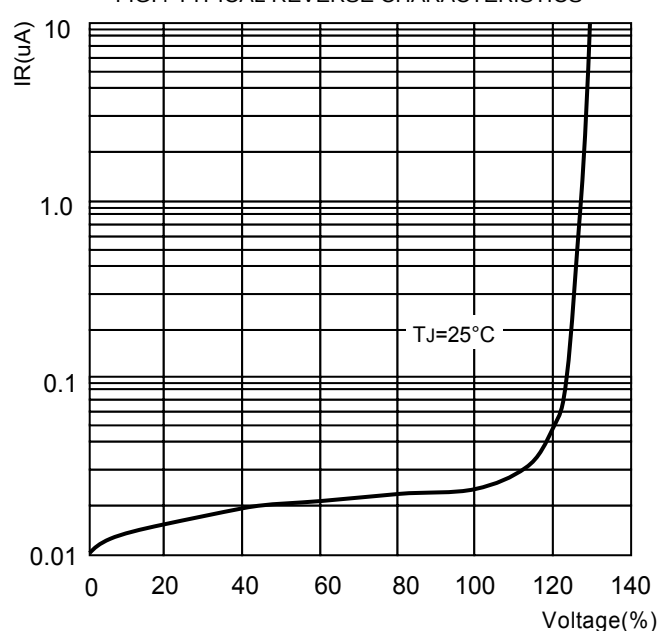

GBU Package Outline Dimensions

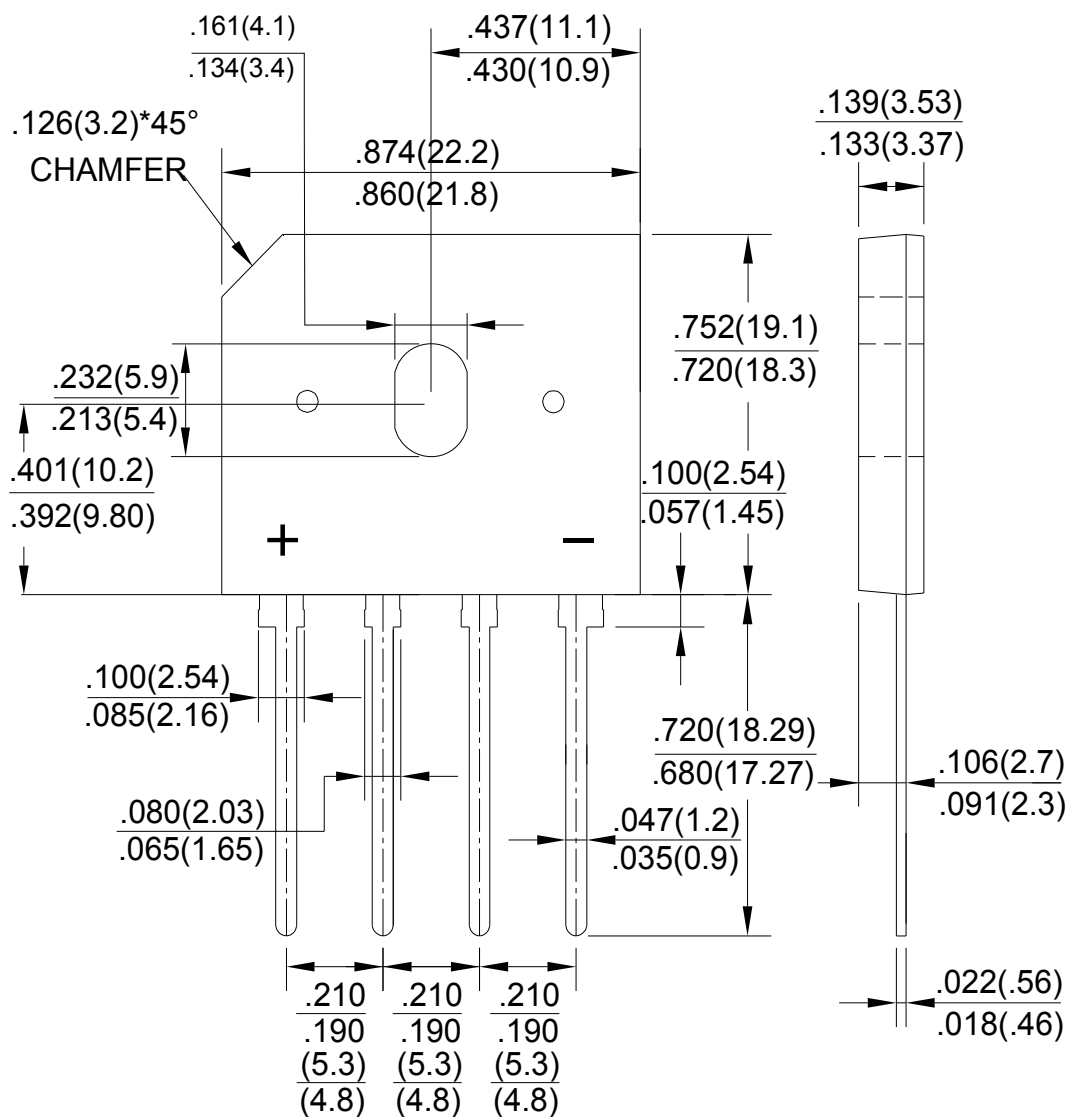

Unit: in inches (millimeters)