


SOT-23 Plastic-Encapsulate MOSFETS


P-Channel MOSFET

Features

- $V_{DS} (V) = -60V$
- $I_D = -2.85 A$ ($V_{GS} = -10V$)
- $R_{DS(ON)} < 340m\Omega$ ($V_{GS} = -10V$)
- $R_{DS(ON)} < 550m\Omega$ ($V_{GS} = -4.5V$)
- Pb-Free Package May be Available. The G-Suffix Denotes a Pb-Free Lead Finish



SOT-23

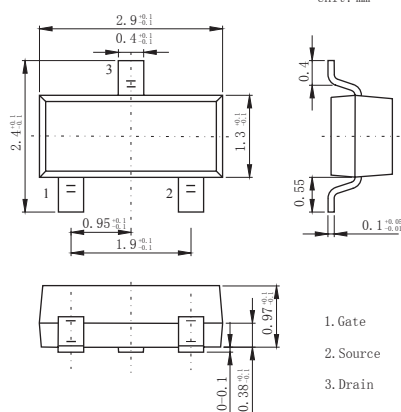

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-60	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current *1,*2 $T_a = 25^\circ C$	I_D	-2.85	A
$T_a = 70^\circ C$		-1.25	
Pulsed Drain Current	I_{DM}	-8	
Avalanche Current $L=0.1mH$	I_{AS}	-5	
Power Dissipation *1,*2 $T_a = 25^\circ C$	P_D	1.56	W
$T_a = 70^\circ C$		0.85	
Thermal Resistance.Junction- to-Ambient $t \leq 5 \text{ sec}$	R_{thJA}	100	$^\circ C/W$
Steady State *1		166	
Thermal Resistance.Junction- to-Case *1	R_{thJC}	60	
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 to 150	

*1 Surface Mounted on FR4 Board.

*2 $t \leq 5 \text{ sec.}$

■ Electrical Characteristics Ta = 25℃







Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V _{DSS}	I _D =-250 μ A, V _{GS} =0V	-60			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-48V, V _{GS} =0V			-1	μ A
		V _{DS} =-48V, V _{GS} =0V, T _J =125℃			-50	
Gate-Body leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =-250 μ A	-1		-3	V
Static Drain-Source On-Resistance *1	R _{DS(on)}	V _{GS} =-10V, I _D =-1.25A			340	m Ω
		V _{GS} =-4.5V, I _D =-1A			550	
On state drain current *1	I _{D(ON)}	V _{GS} =-4.5V, V _{DS} =-10V	-6			A
Forward Transconductance *1	g _{FS}	V _{DS} =-4.5V, I _D =-1A		1.9		S
Total Gate Charge	Q _g	V _{GS} =-10V, V _{DS} =-30V, I _D =-1.25A		5.4	12	nC
Gate Source Charge	Q _{gs}			1.15		
Gate Drain Charge	Q _{gd}			0.92		
Turn-On DelayTime	t _{d(on)}	V _{GS} =-4.5V, V _{DS} =-30V, R _L =30 Ω, R _{GEN} =6 Ω I _D =-1A		10.5	20	ns
Turn-On Rise Time	t _r			11.5	20	
Turn-Off DelayTime	t _{d(off)}			15.5	30	
Turn-Off Fall Time	t _f			7.5	15	
Body Diode Reverse Recovery Time	t _{rr}	I _F =-1.25A, di/dt=100A/ μ s		30	55	
Maximum Body-Diode Continuous Current	I _S				-1.25	A
Diode Forward Voltage	V _{SD}	I _S =-1.25A, V _{GS} =0V		-0.82	-1.2	V

*1 Pulse test; pulse width ≤ 300us, duty cycle ≤ 2%.






■ Marking

Marking	S09
---------	-----

■ Typical Characteristics

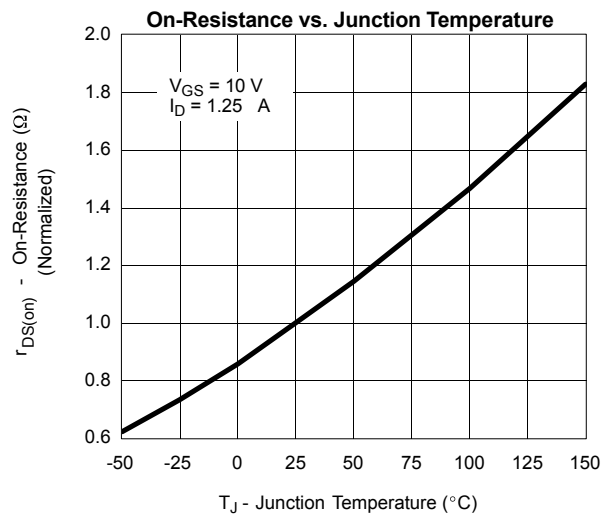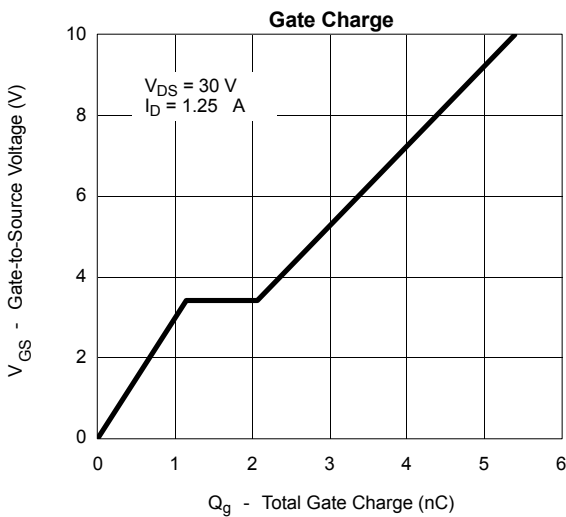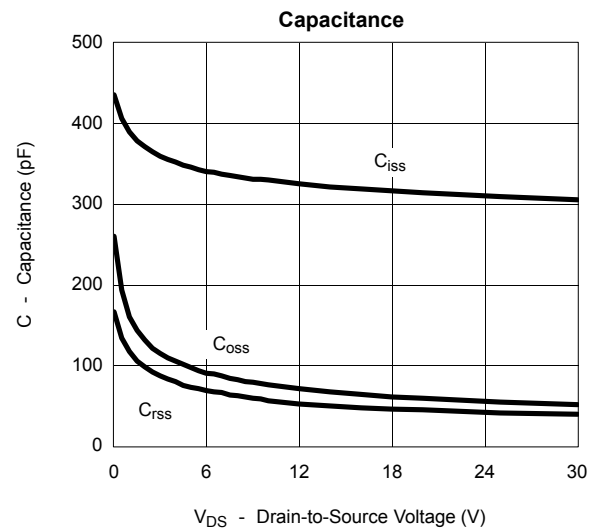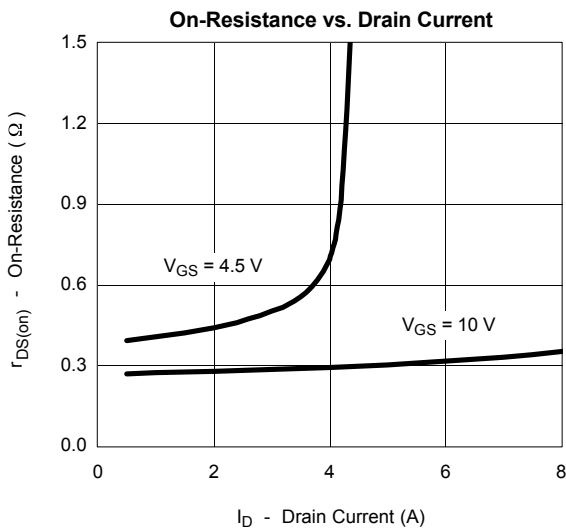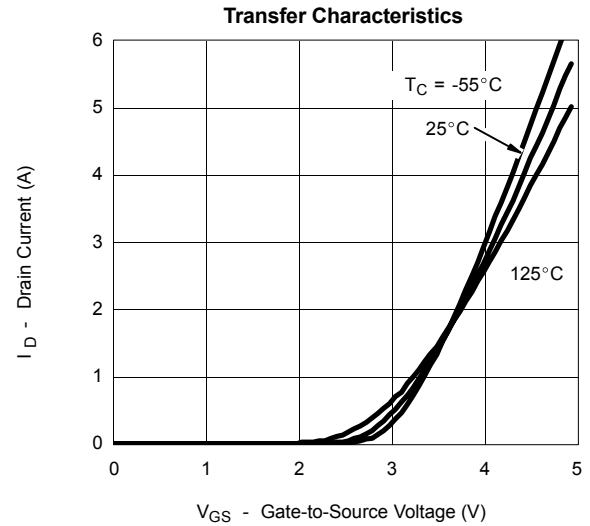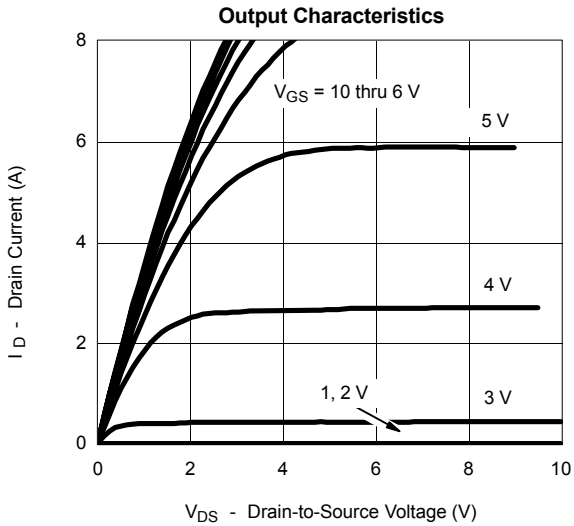

■ Typical Characteristics

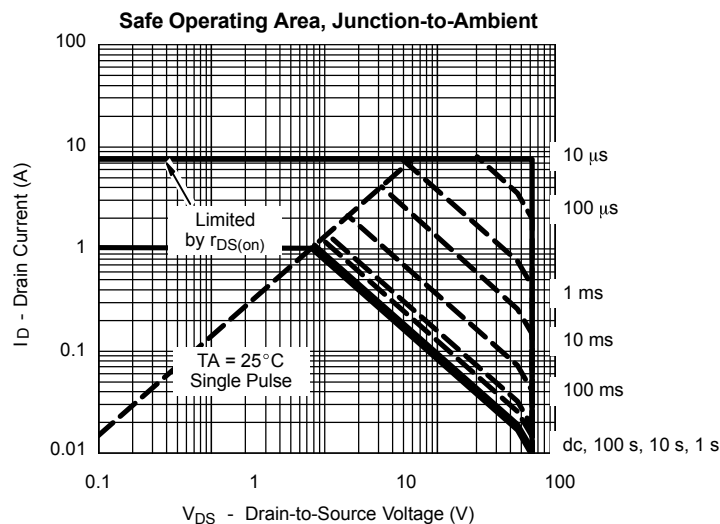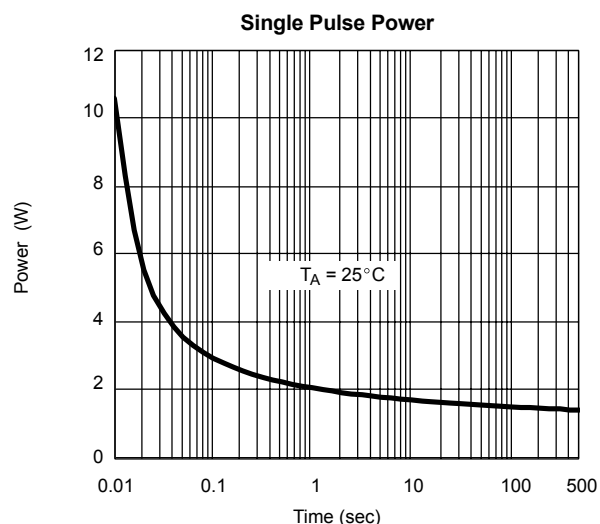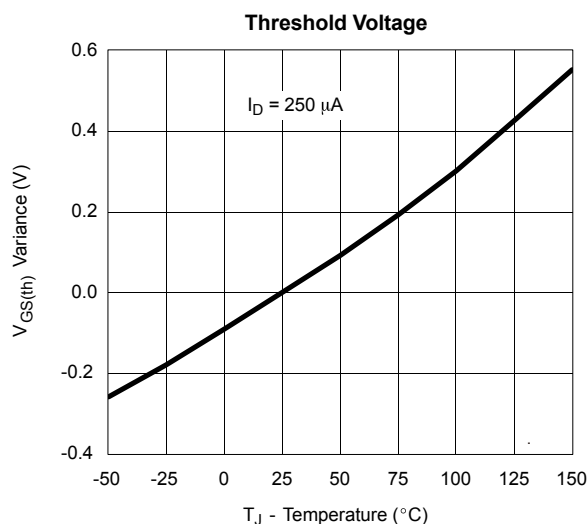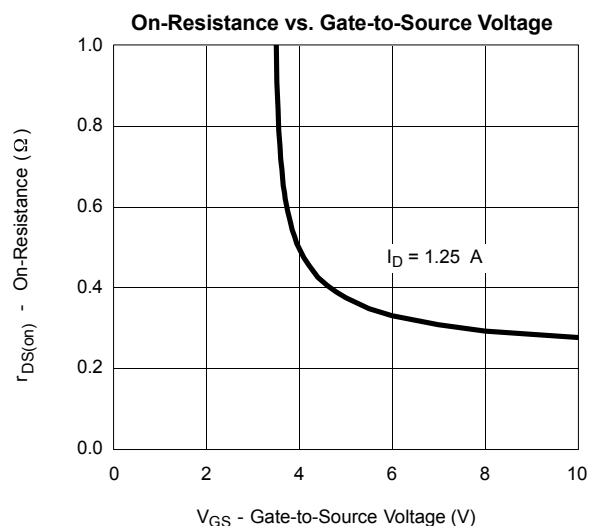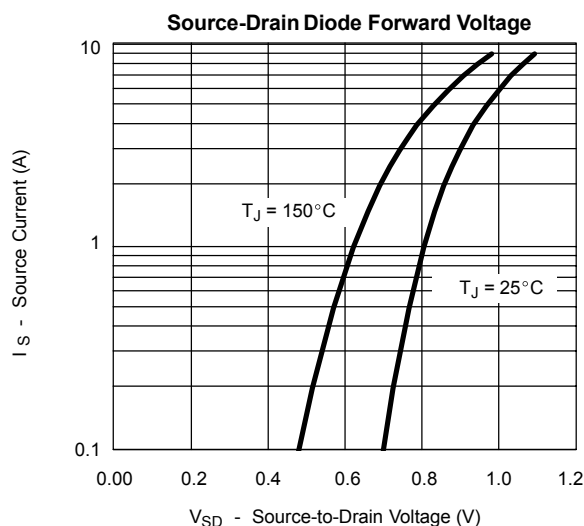

■ Typical Characteristics

