


1A Surface Mount Schottky Barrier Rectifiers

Features:

- Low profile surface mounted application in order to optimize board space.
- Low power loss, high efficiency.
- High current capability, low forward voltage drop.
- Ultra high-speed switching.
- Silicon epitaxial planar chip, metal silicon junction.
- Suffix "G" indicates Halogen-free part, ex. B120WG-S.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

SOD-123S

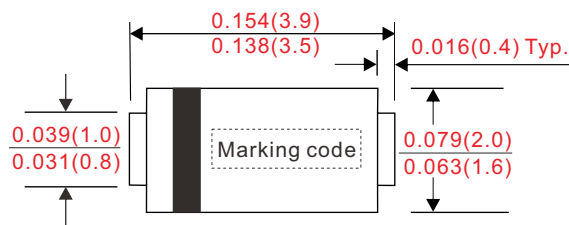

Dimensions in inches and (millimeters)

Mechanical Data:

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-123S
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Weight : Approximated 0.018 gram

Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1	I_O			1.0	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}			30	A
Reverse current	$V_R = V_{RRM} \quad T_A = 25^\circ\text{C}$	I_R			0.1	mA
	$V_R = V_{RRM} \quad T_A = 100^\circ\text{C}$				20	
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		120		pF
Thermal resistance	Junction to ambient	$R_{\theta JA}$		88		°C/W
Storage temperature		T_{STG}	-55		+175	°C

Symbol	Marking code	Max. repetitive peak reverse voltage V_{RRM} (V)	Max. RMS voltage V_{RMS} (V)	Max. DC blocking voltage V_R (V)	Max. forward voltage @ 1A, $T_A = 25^\circ\text{C}$ V_F (V)	Operating temperature T_J (°C)
B120W-S	12	20	14	20	0.45	-55 ~ +150
B140W-S	14	40	28	40	0.50	
B160W-S	16	60	42	60	0.70	
B1100W-S	10 / K1A	100	70	100	0.85	
B1150W-S	115	150	105	150	0.87	-55 ~ +175
B1200W-S	120	200	140	200	0.90	

Rating and characteristic curves

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

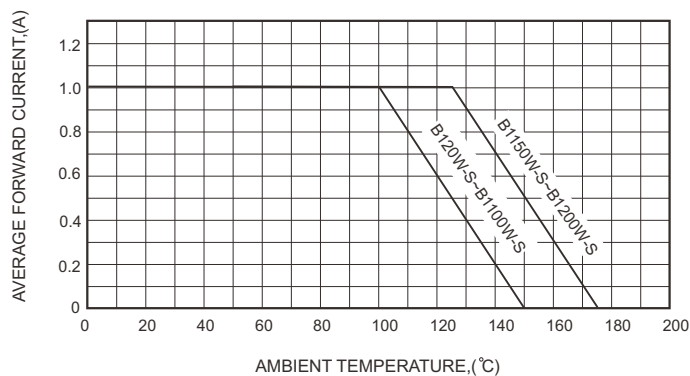


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

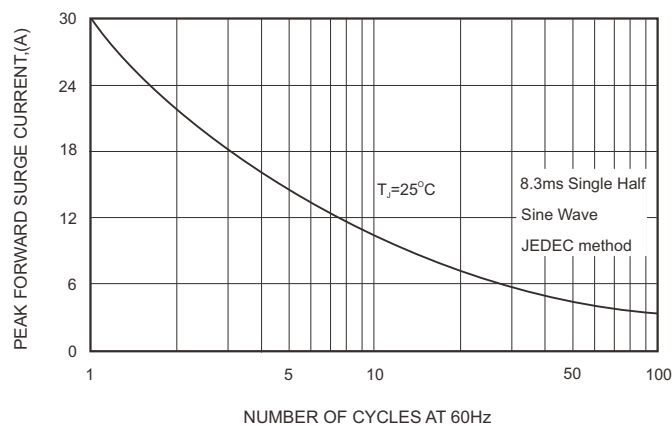


FIG.4-TYPICAL JUNCTION CAPACITANCE

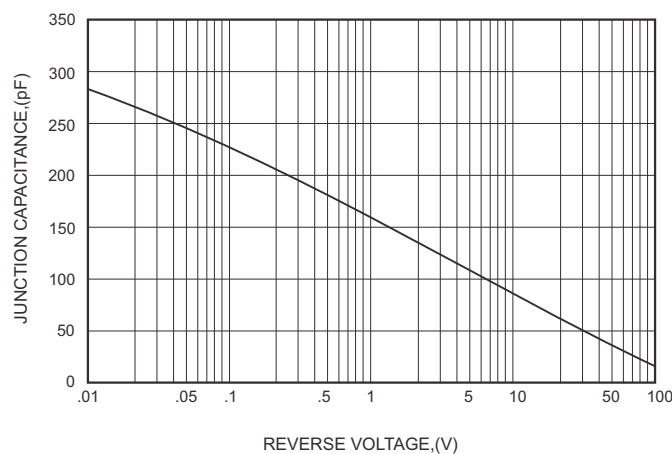


FIG.2-TYPICAL FORWARD CHARACTERISTICS



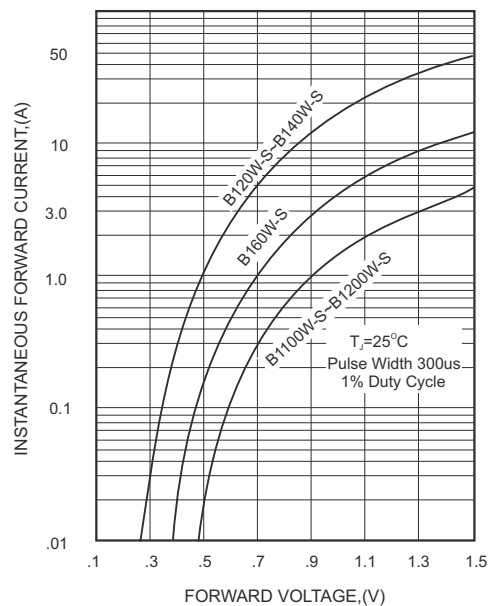


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

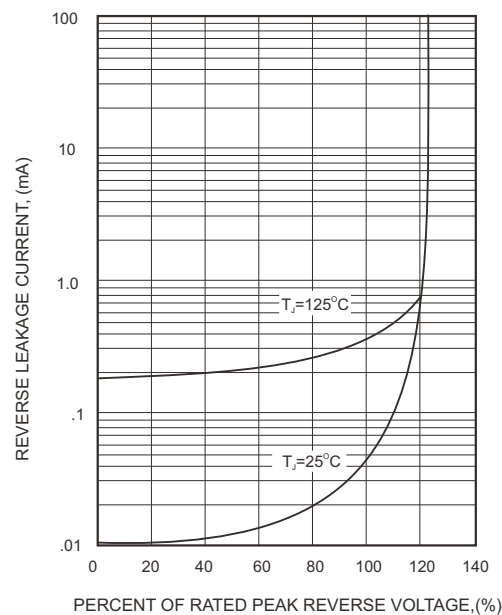

SOD-123S foot print

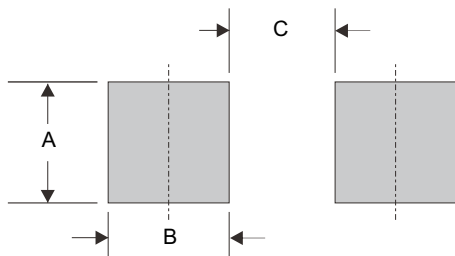

A	B	C
0.044 (1.10)	0.039 (1.00)	0.079 (2.00)

Dimensions in inches and (millimeters)