

SOT-23 Plastic-Encapsulate Transistors


TRANSISTOR (NPN)

BC846A, B

BC847A, B,C

BC848A, B,C

SOT-23



1. BASE
 2. EMITTER
 3. COLLECTOR

Features:

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

DEVICE MARKING

BC846A=1A ; BC846B=1B ;

BC847A=1E ; BC847B=1F ; BC847C=1G;

BC848A=1J ; BC848B=1K ; BC848C=1L

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)









Symbol	Parameter	Value	Unit
V _{CB0}	Collector-Base Voltage	BC846	80
		BC847	50
		BC848	30
V _{CE0}	Collector-Emitter Voltage	BC846	65
		BC847	45
		BC848	30
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current –Continuous	0.1	A
P _C	Collector Power Dissipation	200	mW
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55-+150	°C

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	BC846 BC847 BC848	V _{CBO} I _C = -10μA, I _E =0	80 50 30		V
Collector-emitter breakdown voltage	BC846 BC847 BC848	V _{CEO} I _C = -10mA, I _B =0	65 45 30		V
Emitter-base breakdown voltage		V _{EBO} I _E = -1μA, I _C =0	6		V
Collector cut-off current	BC846 BC847 BC848	I _{CBO} V _{CB} = 70 V, I _E =0 V _{CB} = 50 V, I _E =0 V _{CB} = 30 V, I _E =0		0.1	μA
Collector cut-off current	BC846 BC847 BC848	I _{CEO} V _{CE} = 60 V, I _B =0 V _{CE} = 45 V, I _B =0 V _{CE} = 30 V, I _B =0		0.1	μA
Emitter cut-off current		I _{EBO} V _{EB} = 5 V, I _C =0		0.1	μA
DC current gain	BC846A, 847A,848A BC846B, 847B,848B BC847C,BC848C	h _{FE} V _{CE} = 5V, I _C = 2mA	110 200 420	220 450 800	
Collector-emitter saturation voltage		V _{CE(sat)} I _C =100mA, I _B = 5 mA		0.5	V
Base-emitter saturation voltage		V _{BE(sat)} I _C =100mA, I _B = 5mA		1.1	V
Transition frequency		f _T V _{CE} = 5 V, I _C = 10mA f=100MHz	100		MHz
Collector capacitance		C _{ob} V _{CB} =10V, f=1MHz		4.5	pF

Typical Characteristics **BC847**

Static Characteristic

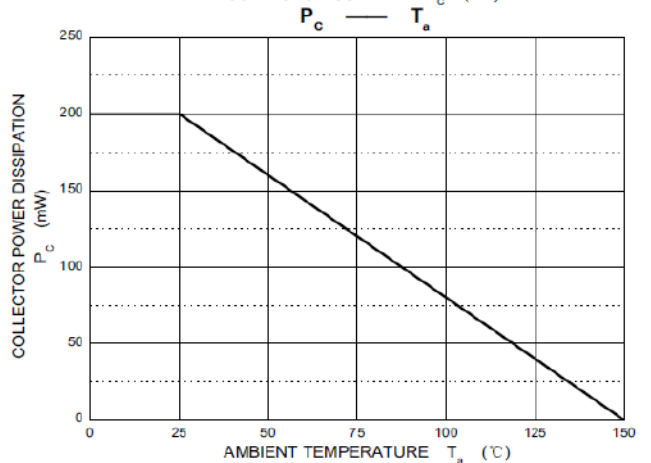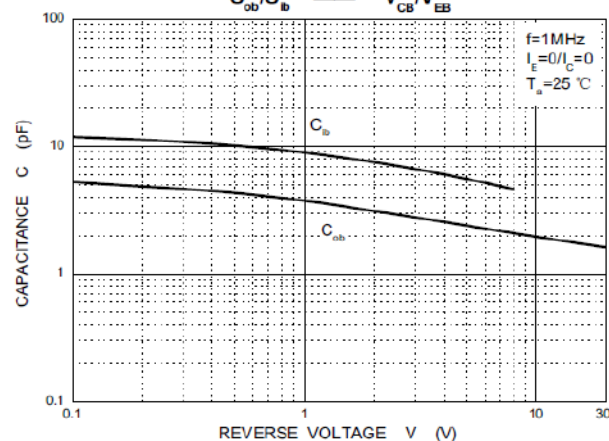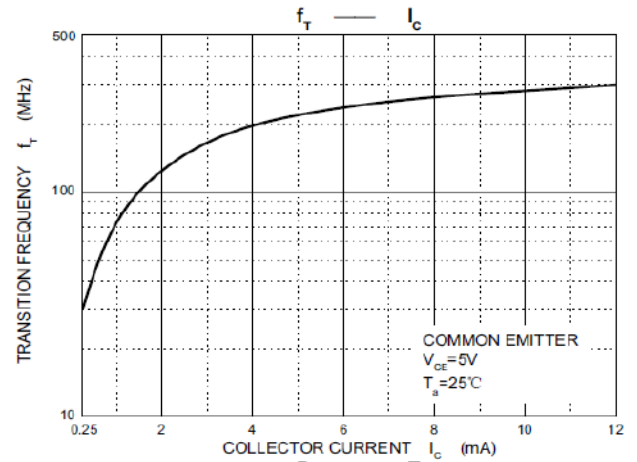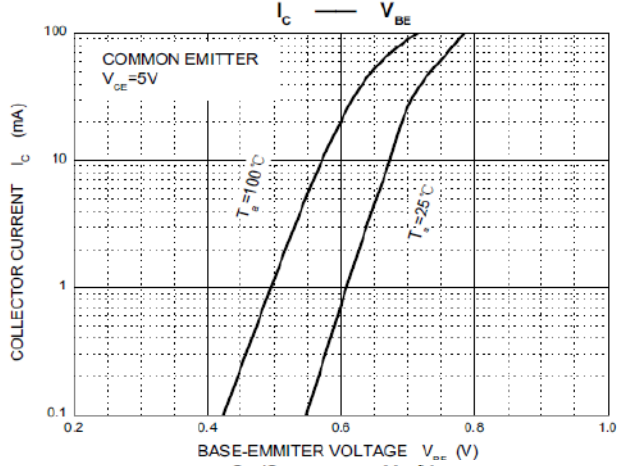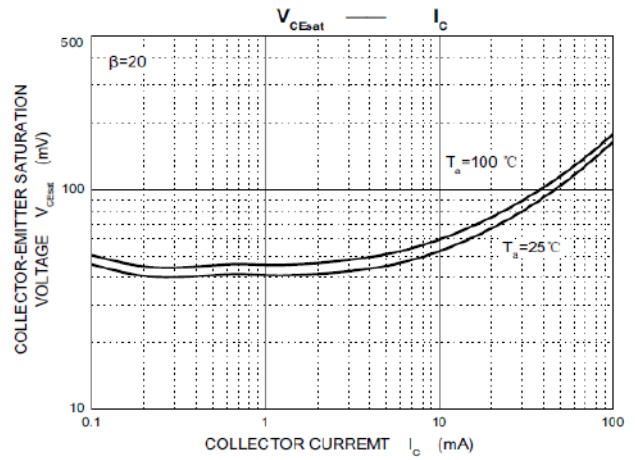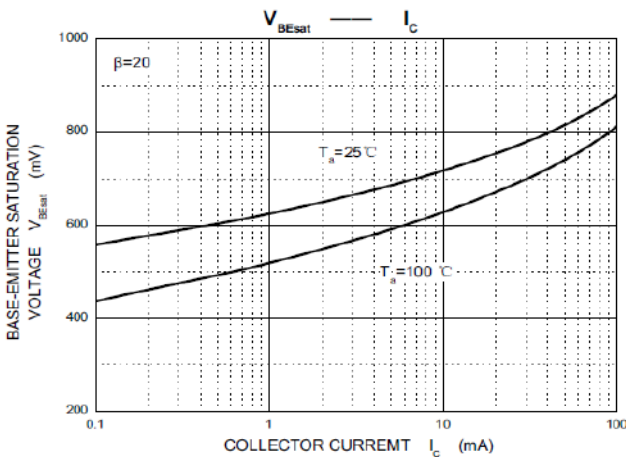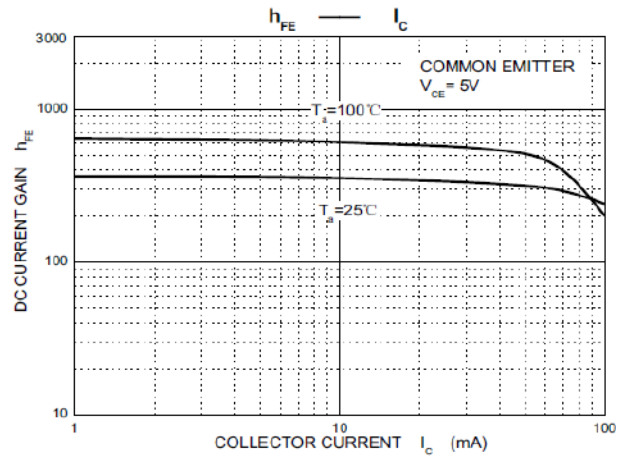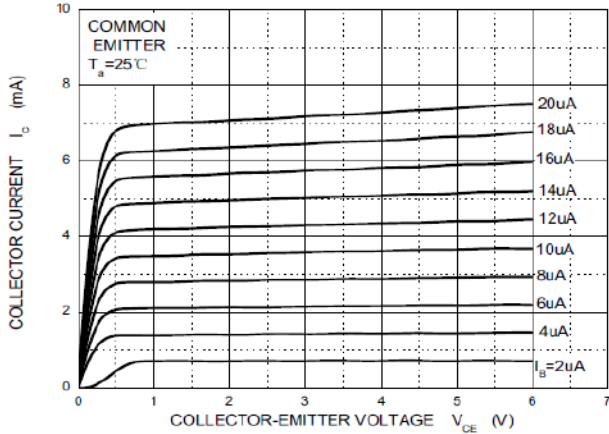


SOT-23 Package Outline Dimensions

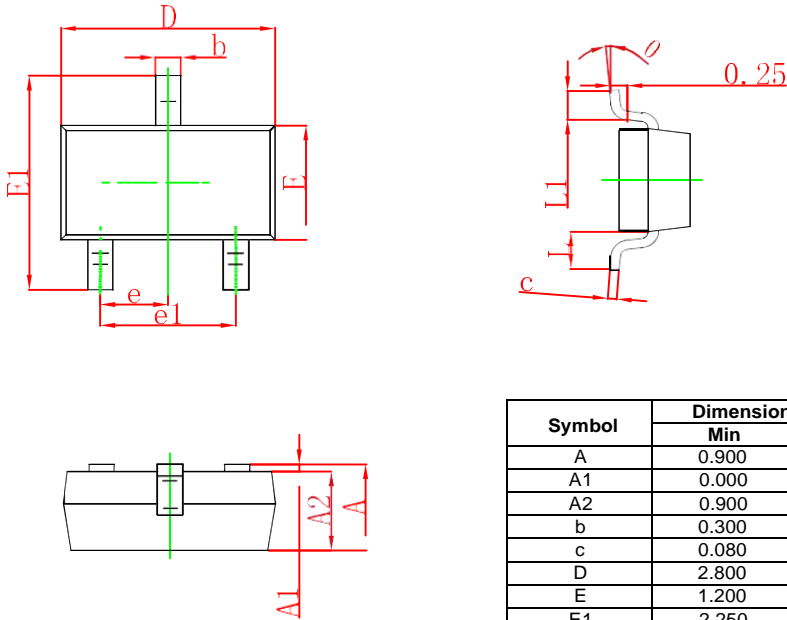

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout




- Note:
1. Controlling dimension: In millimeters.
 2. General tolerance: $\pm 0.05\text{mm}$.
 3. The pad layout is for reference purposes only.

SOT-23 Tape and Reel

SOT-23 Tape and reel


SOT-23 Embossed Carrier Tape

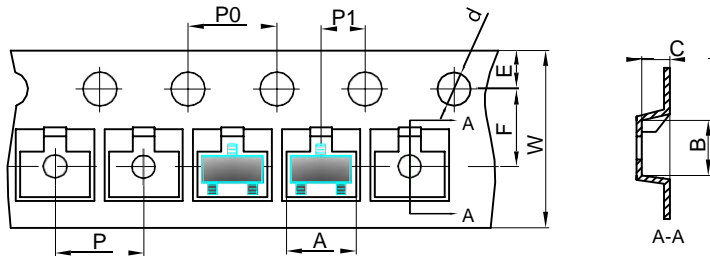


Packaging Description:
 SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

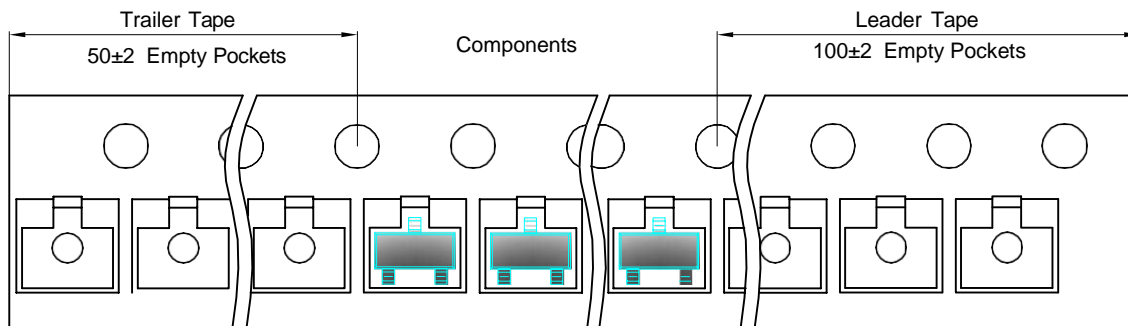

SOT-23 Reel

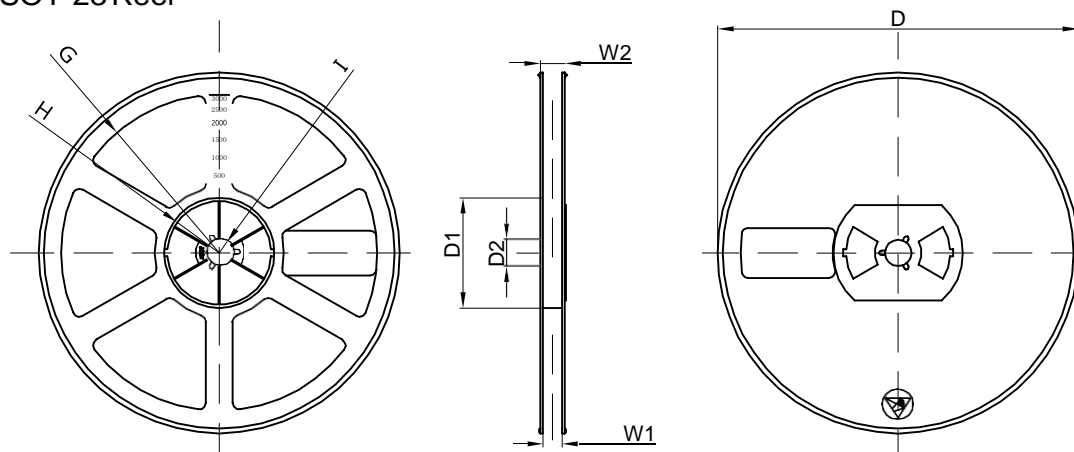

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203x203x195	120,000 pcs	438x438x220	