

AUTOMOTIVE SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 40 Volts

Forward Current - 3.0Amperes

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2015/863/EU
- AEC-Q101 qualified and PPAP capable



IATF16949认证



AEC-Q101 Qualified

Mechanical Data

- Case: SOD-123FL molded plastic body
- Terminals: Solder Plated, solderable per MIL-STD-750,method 2026
- Polarity: Color band denotes cathode end
- Weight: 11.7 mg(approximately)



Typical Applications

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

Primary Characteristics

Primary Characteristics	
$I_F(AV)$	3.0A
V_{RRM}	40V
I_{FSM}	80A
V_F at $I_F=3.0A(125^\circ C)$	0.43V
$I_{R(Max)}$	100 μ A
$T_J(Max)$	150°C
Package	SOD-123FL

Maximum Ratings

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	40	v
Maximum average forward rectified current	$I_F(AV)$	3.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	80	A
Operating junction temperature range	T_J	-55 to+150	°C
Storage temperature range	T_{stg}	-55 to+150	°C

RATINGS AND CHARACTERISTIC OF K34-V

ELECTRICAL CHARACTERISTICS (T_A=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	Typ.	Max.	Unit
Instaneous forward voltage	T _J =25°C	I _F =1.0A	V _F ¹⁾	0.40	-	V
		I _F =3.0A		0.51	0.55	
	T _J =125°C	I _F =1.0A		0.30	-	
		I _F =3.0A		0.43	0.47	
Reverse current	T _J =25°C	V _R =40V	I _R ²⁾	-	100	μA
	T _J =125°C			-	15	mA
	T _J =125°C	V _R =32V		-	12	
Typical junction capacitance	4V,1MHz		C _J	160		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width ≤40ms

Thermal Characteristics

Parameter	Symbol	K34-V	Unit
Typical thermal resistance ³⁾ Junction to Ambient	R _{θJA}	125	°C/W
⁴⁾ Junction to Mount	R _{θJM}	18	

3) The heat generated must be less than the thermal conductivity from junction-to-ambient: $dP_J/dT_J < 1/R_{\theta JA}$ 4) Device mounted on 10 mm x 10 mm pad size area footprint

Availabale Pack Information

Product code	Pack	Reel Size (mm)	Quantity (pcs/reel)	Box Size LxWxH (mm)	Quantity (reel/box)	Carton Size LxWxH (mm)	Quantity (box/carton)
K34-V-SOD-123FL	T/R	Φ330	7500	330x35x333	2	364x364x360	8

Fig.1-Forward Current Derating Curve

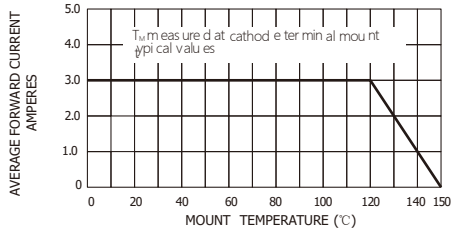


Fig.2-Maximum Non-repetitive Peak Forward Surge Current

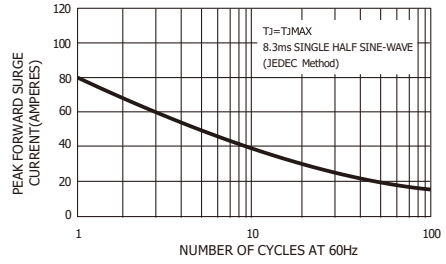


Fig.3-Typical Instantaneous Forward Characteristics

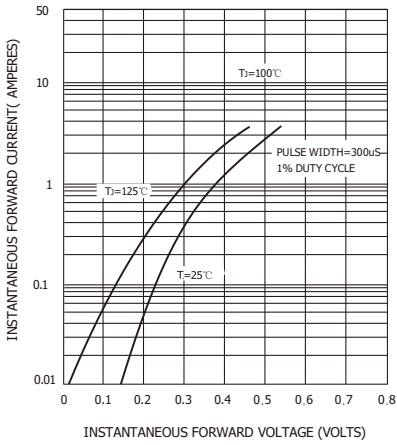


Fig.4-Typical Reverse Characteristics



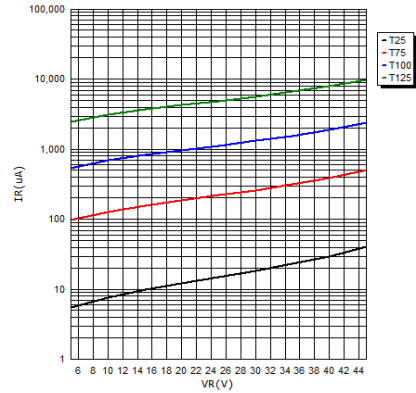


FIG.5-TYPICAL JUNCTION CAPACITANCE

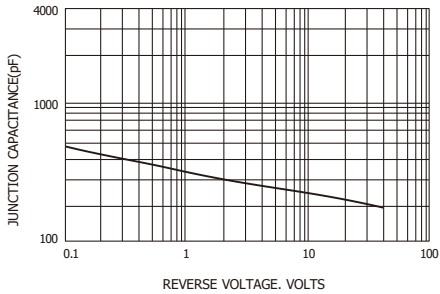


PACKAGE OUTLINE DIMENSIONS

SOD-123FL

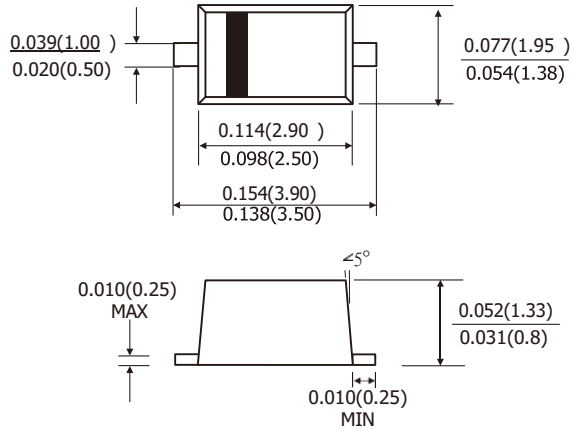

Suggested PAD Layout

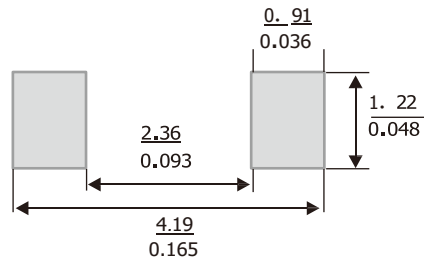

Dimensions in millimeters/inches