

AUTOMOTIVE LOW VF SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 100Volts

Forward Current - 15.0Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- Very low profile-typical height of 1.1mm
- Ideal for automated placement
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2015/863/EU
- AEC-Q101 qualified and PPAP capable



RoHS
COMPLIANT





IATF16949认证



AEC-Q101 Qualified

MECHANICAL DATA

- Case: TO-277 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Mounting Position: Any
- Weight: 0.092 grams(approx)

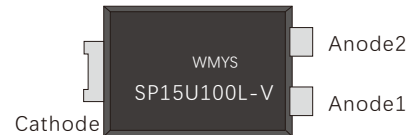

TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

MARKING:
 W-Work week
 M-Work month
 Y-Work year
 S-Assembly location
 SP15U100L-Device code
 V-for automobile

MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	100	V
Maximum average forward rectified current	$I_{F(AV)}$	15.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	150	A
Operating junction temperature range	T_j	-55 to+150	°C
Storage temperature range	T_{std}	-55 to+150	°C

RATINGS AND CHARACTERISTIC OF KW15U100L-V

ELECTRICAL CHARACTERISTICS (T_A=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	Typ.	Max.	Unit
Instaneous forward voltage	T _J =25°C	I _F =15A	V _F 1)	0.68	0.72	V
		I _F =5A		0.50	-	
		I _F =1A		0.39	-	
	T _J =125°C	I _F =15A		0.61	-	
		I _F =5A		0.45	-	
		I _F =1A		0.28	-	
Reverse current	V _R =100V	T _A =25°C	I _R 2)	-	50	μA
		T _A =100°C		-	3	mA
		T _A =125°C		-	20	
Typical junction capacitance	4V,1MHz		C _J	950		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width≤40ms

THERMAL CHARACTERISTICS

Parameter	Symbol	TO-277	Unit
Typical thermal resistance 3)	R _{θJA}	60.0	°C/W
	R _{θJL}	3.0	

3 Units mounted on recommended PCB 1 oz. Pad layout

AVAILABALE PACK INFORMATION

Product code	Pack	Carton Size L×W×H(mm)	Inner Box Size L×W×H(mm)	Reel diameter (mm)	Inner Box Number	Reel Number Per A Inner Box	Part Number Per A Reel(K)	Quantity(carton) (K)
KW15U100L-V -TO-277	Reel	370×370×360	338×338×39	φ330	7	2	5	70

RATINGS AND CHARACTERISTIC OF KW15U100-VL

FIG.1-FORWARD CURRENT DERATING CURVE

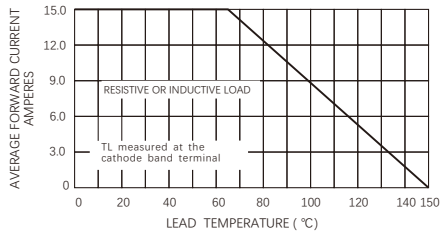


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

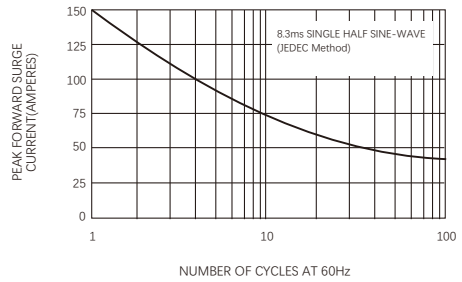


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

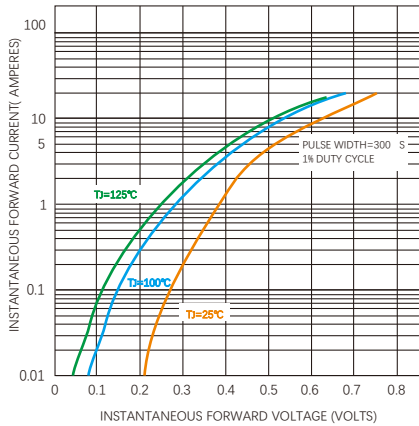


FIG.4-TYPICAL REVERSE CHARACTERISTICS



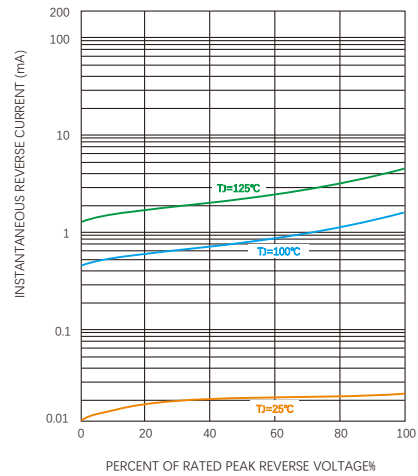


FIG.5-TYPICAL JUNCTION CAPACITANCE

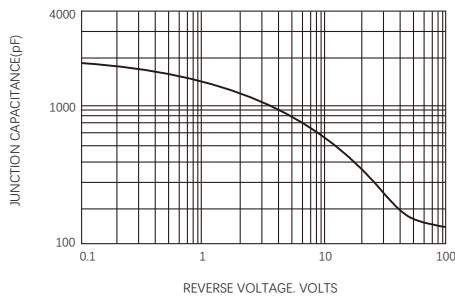


PACKAGE OUTLINE DIMENSIONS

TO-277

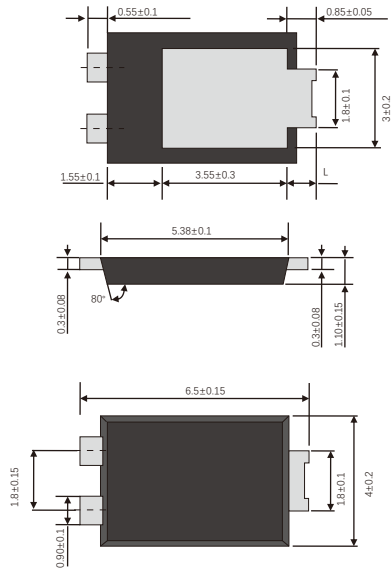

Suggested Pad

■ TO-277 foot print



A	B	C	D	E	F	G
0.185 (4.70)	0.142 (3.60)	0.152 (3.87)	0.260 (6.60)	0.055 (1.40)	0.035 (0.90)	0.031 (0.80)

Dimensions in inches and (millimeters)