Silicon Epitaxial Planar Zener Diodes

In MiniMELF case especially for automatic insertion.

These diodes are also available in DO-35 case with the type designation BZX55B...

LL-34

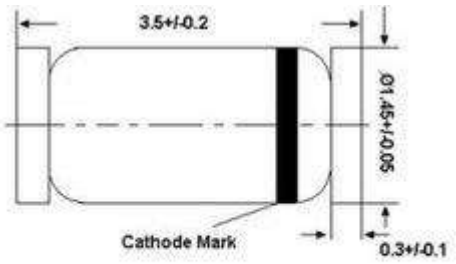

Glass case MiniMELF
Dimensions in mm

Absolute Maximum Ratings (T_a = 25 °C)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	500 [1]	mW
Junction Temperature	T_j	175	°C
Storage Temperature Range	T_{stg}	- 55 to + 175	°C
[1] Valid provided that electrodes are kept at ambient temperature			

Characteristics at T_a = 25 °C

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	0.3 [1]	K/mW
Forward Voltage at I_F = 100 mA	V_F	1	V
[1] Valid provided that electrodes are kept at ambient temperature			

Characteristics at T_a = 25 °C

Type ZMM55B	Zener Voltage Range [1]			Dynamic Resistance			Reverse Leakage Current			Temp coefficient of Zener Voltage
	V_{Znom}	V_{ZT}	at I_{ZT}	Z_{ZT}	Z_{ZK}	at I_{ZK}	T_a = 25 °C	T_a = 125 °C	at V_R	
	(V)	(V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (µA)	Max. (µA)	(V)	TKvz (%/K)
1 [2]	0.75	0.73…0.77	5	8	50	1	-	-	-	-0.26...-0.23
2V0	2	1.96…2.04	5	85	600	1	100	200	1	-0.09...-0.06
2V2	2.2	2.16…2.24	5	85	600	1	75	160	1	-0.09...-0.06
2V4	2.4	2.35…2.45	5	85	600	1	50	100	1	-0.09...-0.06
2V7	2.7	2.65…2.75	5	85	600	1	10	50	1	-0.09...-0.06
3V0	3	2.94…3.06	5	85	600	1	4	40	1	-0.08...-0.05
3V3	3.3	3.23…3.37	5	85	600	1	2	40	1	-0.08...-0.05
3V6	3.6	3.53…3.67	5	85	600	1	2	40	1	-0.08...-0.05
3V9	3.9	3.82…3.98	5	85	600	1	2	40	1	-0.08...-0.05
4V3	4.3	4.21…4.39	5	75	600	1	1	20	1	-0.06...-0.03
4V7	4.7	4.61…4.79	5	60	600	1	0.5	10	1	-0.05...+0.02
5V1	5.1	5…5.2	5	35	550	1	0.1	2	1	-0.02...+0.02
5V6	5.6	5.49…5.71	5	25	450	1	0.1	2	1	-0.05...+0.05
6V2	6.2	6.08…6.32	5	10	200	1	0.1	2	2	0.03...0.06
6V8	6.8	6.66…6.94	5	8	150	1	0.1	2	3	0.03...0.07
7V5	7.5	7.35…7.65	5	7	50	1	0.1	2	5	0.03...0.07
8V2	8.2	8.04…8.36	5	7	50	1	0.1	2	6.2	0.03...0.08
9V1	9.1	8.92…9.28	5	10	50	1	0.1	2	6.8	0.03...0.09
10	10	9.8…10.2	5	15	70	1	0.1	2	7.5	0.03...0.1
11	11	10.78…11.22	5	20	70	1	0.1	2	8.2	0.03...0.11
12	12	11.76…12.24	5	20	90	1	0.1	2	9.1	0.03...0.11
13	13	12.74…13.26	5	26	110	1	0.1	2	10	0.03...0.11
15	15	14.7…15.3	5	30	110	1	0.1	2	11	0.03...0.11
16	16	15.68…16.32	5	40	170	1	0.1	2	12	0.03...0.11
18	18	17.64…18.36	5	50	170	1	0.1	2	13	0.03...0.11
20	20	19.6…20.4	5	55	220	1	0.1	2	15	0.03...0.11
22	22	21.56…22.44	5	55	220	1	0.1	2	16	0.04...0.12
24	24	23.52…24.48	5	80	220	1	0.1	2	18	0.04...0.12
27	27	26.46…27.54	5	80	220	1	0.1	2	20	0.04...0.12
30	30	29.4…30.6	5	80	220	1	0.1	2	22	0.04...0.12
33	33	32.34…33.66	5	80	220	1	0.1	2	24	0.04...0.12
36	36	35.28…36.72	5	80	220	1	0.1	2	27	0.04...0.12
39	39	38.22…39.78	2.5	90	500	0.5	0.1	5	30	0.04...0.12
43	43	42.14…43.86	2.5	90	500	0.5	0.1	5	33	0.04...0.12
47	47	46.06…47.94	2.5	110	600	0.5	0.1	5	36	0.04...0.12
51	51	49.98…52.02	2.5	125	700	0.5	0.1	10	39	0.04...0.12
56	56	54.88…57.12	2.5	135	700	0.5	0.1	10	43	0.04...0.12
62	62	60.76…63.24	2.5	150	1000	0.5	0.1	10	47	0.04...0.12
68	68	66.64…69.36	2.5	200	1000	0.5	0.1	10	51	0.04...0.12
75	75	73.5…76.5	2.5	250	1000	0.5	0.1	10	56	0.04...0.12

[1] Tested with pulses t_p = 20 ms.

[2] The ZMM55B1 is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode electrode to the negative pole.

Breakdown characteristics

T_j = constant (pulsed)

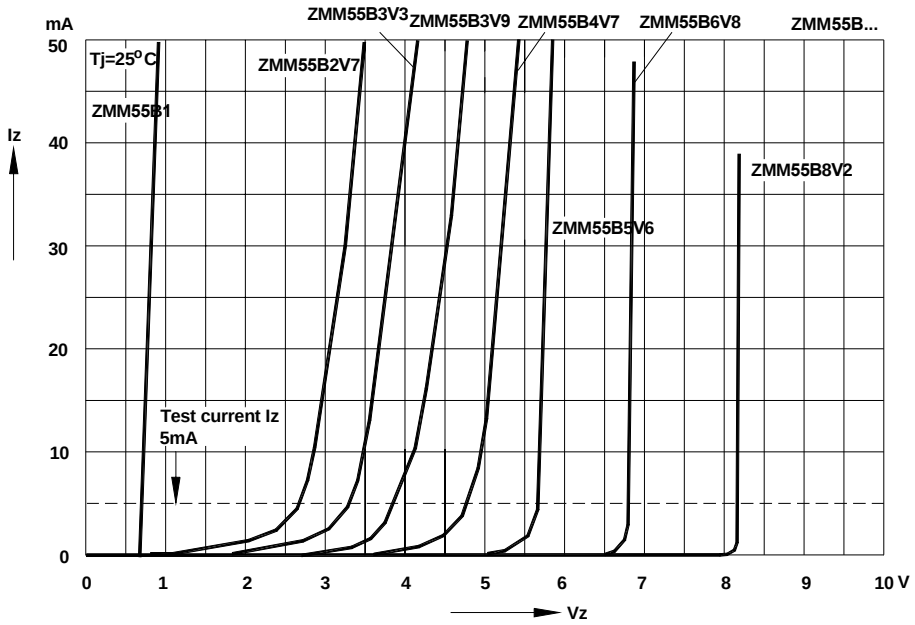

Breakdown characteristics

T_j = constant (pulsed)

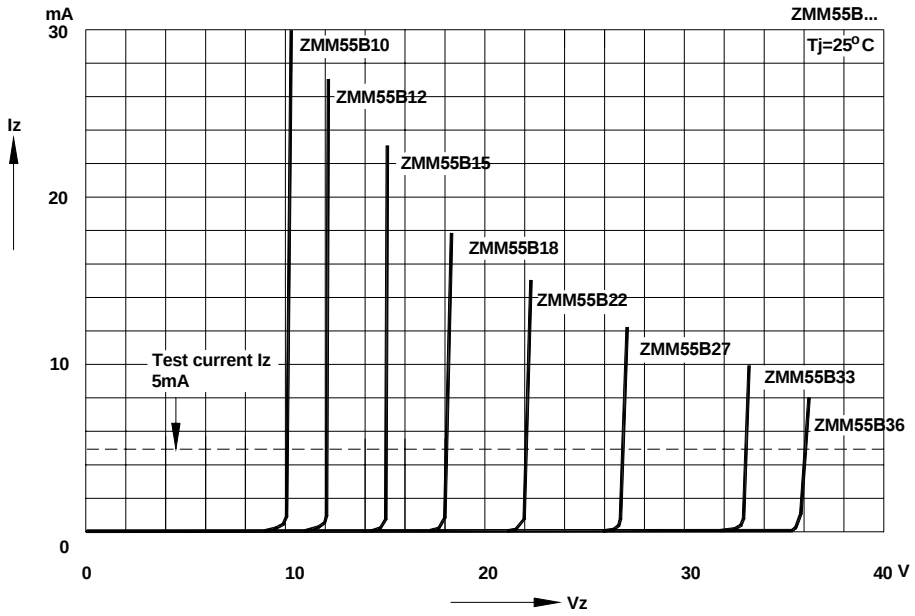

Breakdown characteristics
T_j = constant (pulsed)

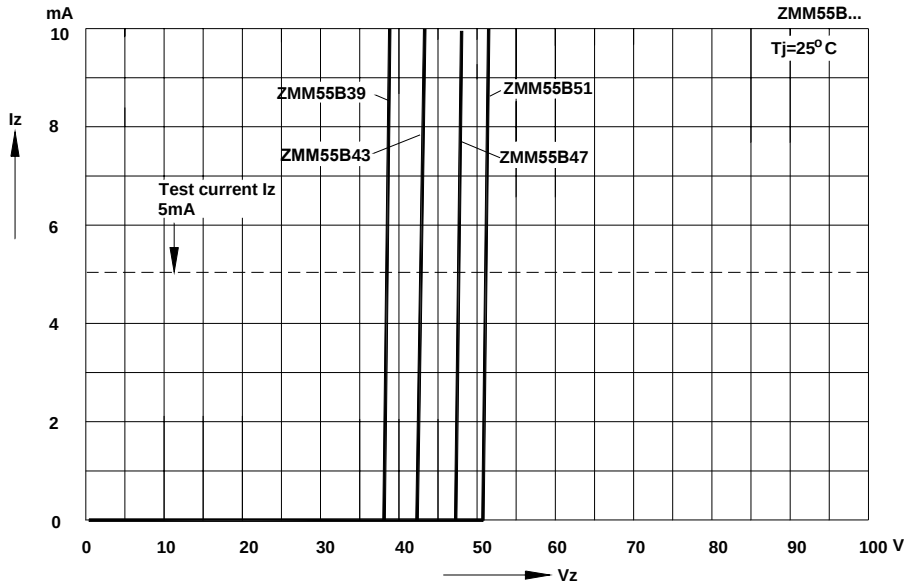

Forward characteristics

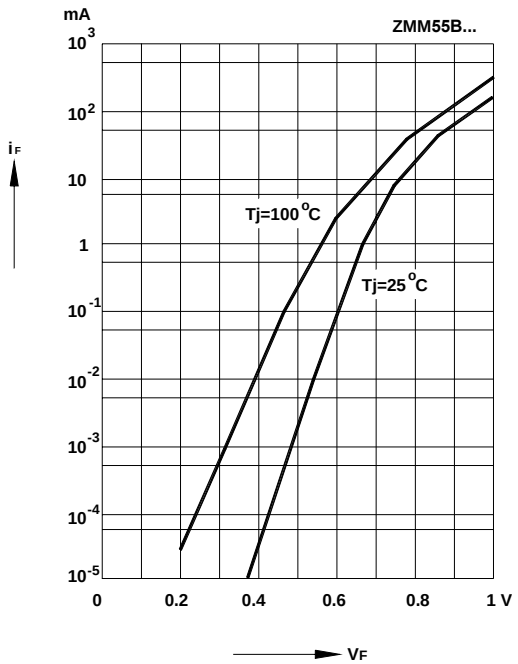

Admissible power dissipation versus ambient temperature
Valid provided that electrodes are kept at ambient temperature.

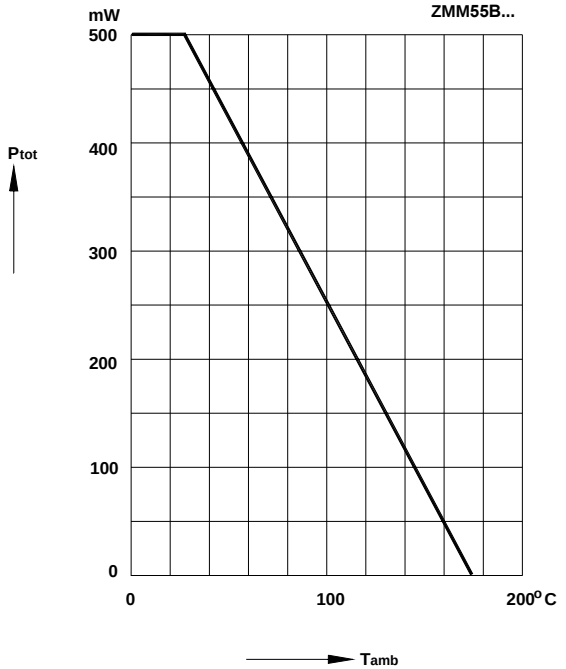

Pulse thermal resistance versus pulse duration

Valid provided that the electrodes are kept at ambient temperature.

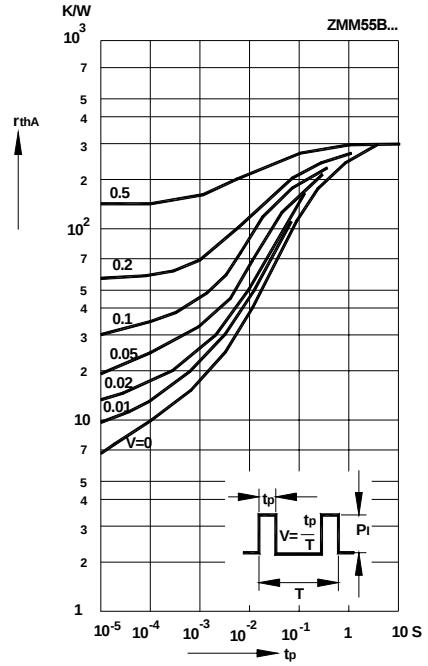

Dynamic resistance versus Zener current

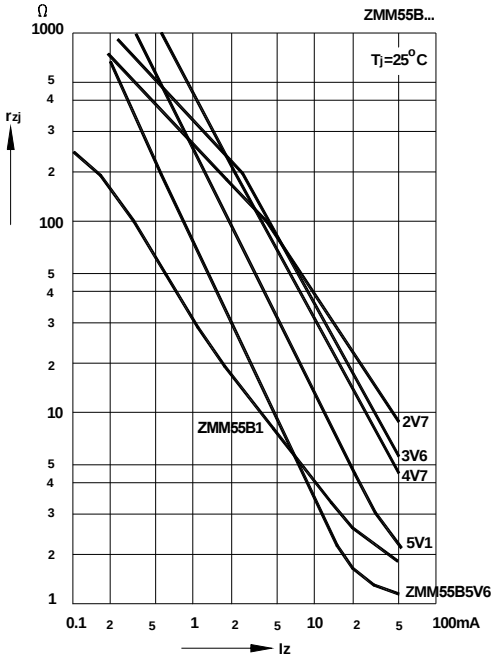

Capacitance versus Zener voltage

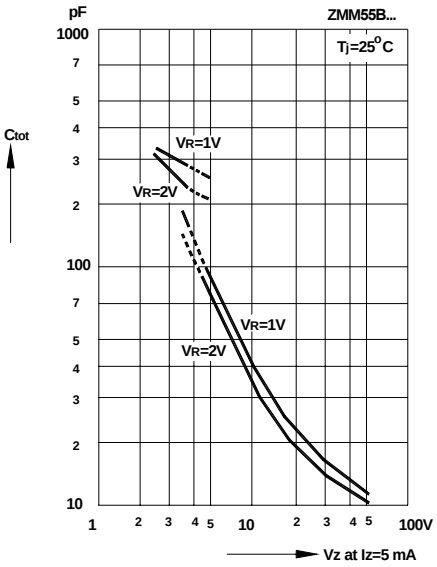

Dynamic resistance versus Zener current

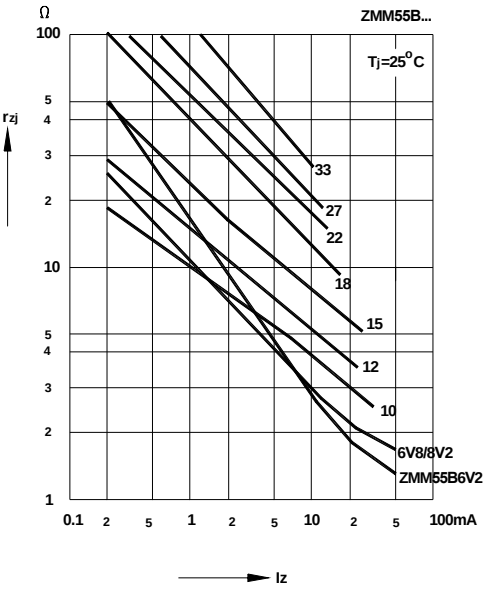

Dynamic resistance versus Zener current

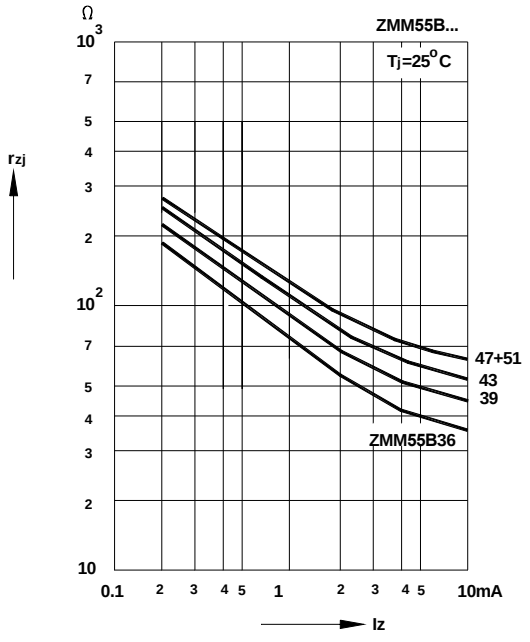

Thermal differential resistance versus Zener voltage

Valid provided that electrodes are kept at ambient temperature

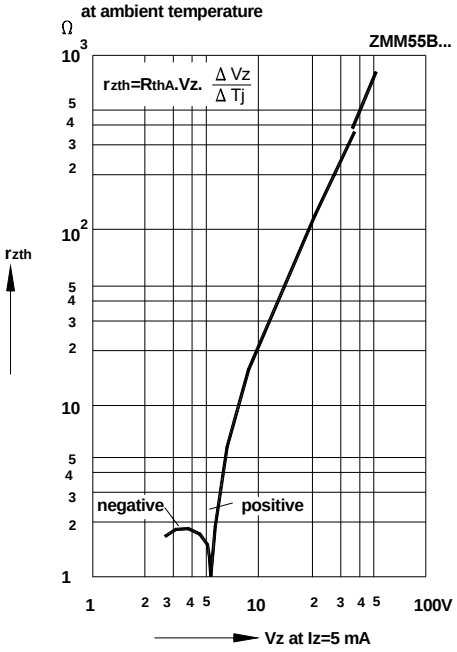

Dynamic resistance versus Zener voltage

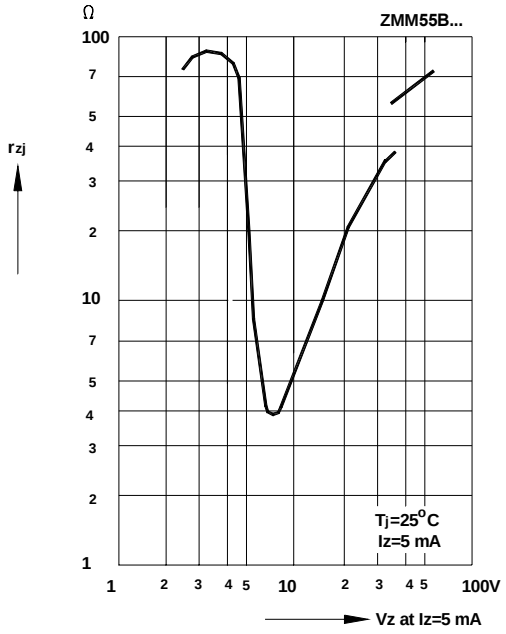

Temperature dependence of Zener voltage versus Zener voltage

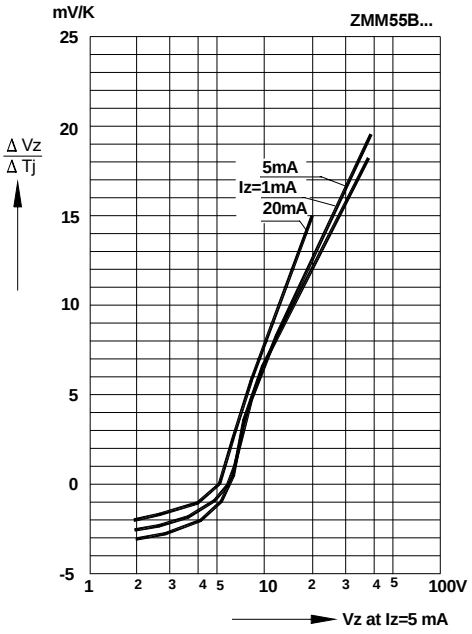

Temperature dependence of Zener voltage versus Zener voltage

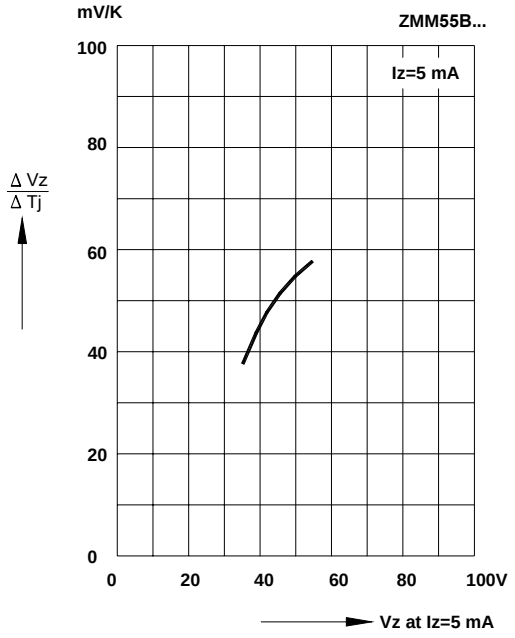

Change of Zener voltage versus junction temperature

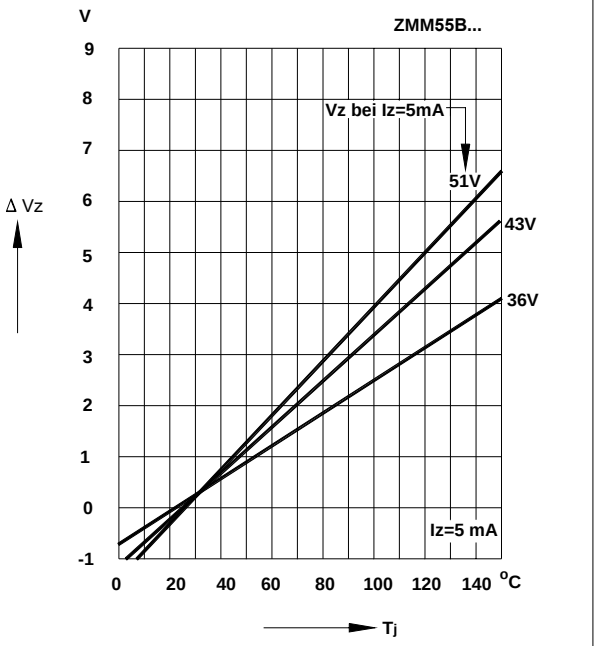

Change of Zener voltage versus junction temperature

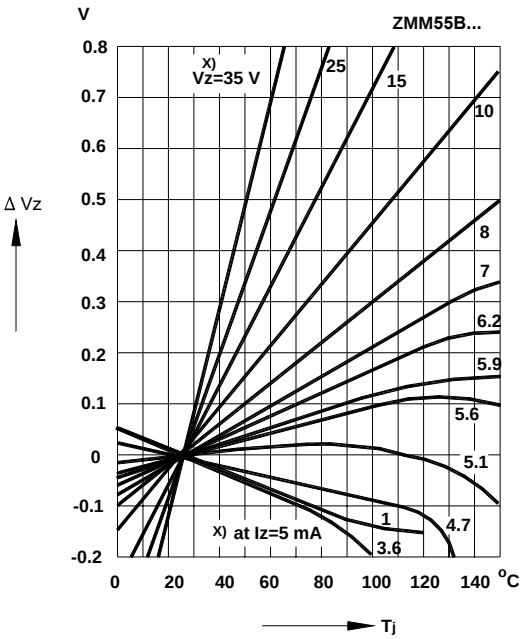

Change of Zener voltge from turn-on up to the point of thermal equilibrium versus Zener voltage

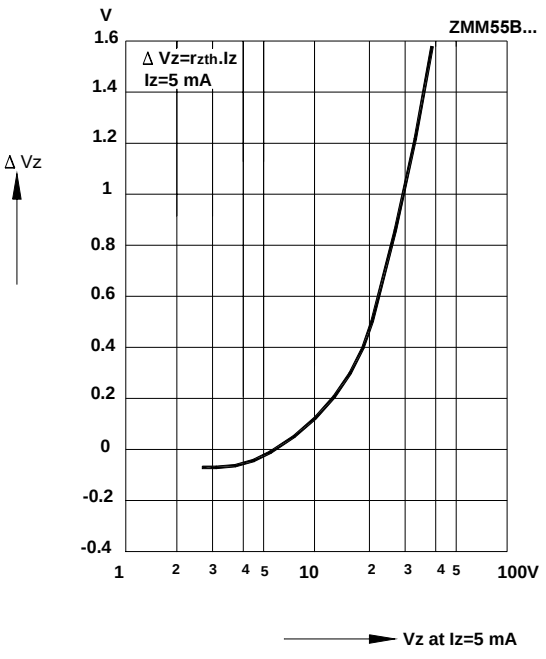

Change of Zener voltge from turn-on up to the point of thermal equilibrium versus Zener voltage