

SOD-523 Bidirectional TVS Diode

APPLICATIONS

- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Personal Digital Assistants (PDA's)
- ◆ Notebooks, Desktops, and Servers
- ◆ Portable Instrumentation
- ◆ Peripherals
- ◆ Pagers

IEC COMPATIBILITY

- ◆ IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- ◆ IEC61000-4-4 (EFT) 40A (5/50 η s)


FEATURES

- ◆ 250 Watts Peak Pulse Power per Line ($t_p=8/20\mu\text{s}$)
- ◆ Protects one birectional I/O line
- ◆ Low clamping voltage
- ◆ Working voltages : 5V
- ◆ Low leakage current

MECHANICAL CHARACTERISTICS

- ◆ SOD-523 Package
- ◆ Molding Compound Flammability Rating : UL 94V-0
- ◆ Weight 0.5 Milligrams (Approximate)
- ◆ Quantity Per Reel : 5,000pcs
- ◆ Reel Size : 7 inch
- ◆ Lead Finish : Lead Free

SOD-523



PIN CONFIGURATION



DEVICE CHARACTERISTICS


MAXIMUM RATINGS (@ 25°C Unless Otherwise Specified)

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp=8/20µs waveform)	P _{PP}	250	Watts
Lead Soldering Temperature	T _L	260 (10 sec.)	°C
Operating Temperature Range	T _J	-55 ~ 150	°C
Storage Temperature Range	T _{STG}	-55 ~ 150	°C


ELECTRICAL CHARACTERISTICS PER LINE (@ 25°C Unless Otherwise Specified)

PART NUMBER	DEVICE MARKING	V _{RWM}	V _B	I _T	V _C	V _C		I _R	C _T
		(V) (max.)	(V) (min.)	(mA)	@1A (max.)	(max.)	(@A)	(µA) (max.)	(pF) (typ.)
KTESD05EB	0	5	6	1	10	12	5	1	10


Pulse Waveform

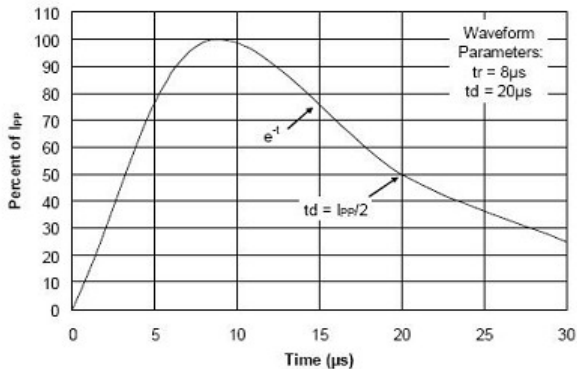



Non-Repetitive Peak Pulse Power vs. Pulse Time

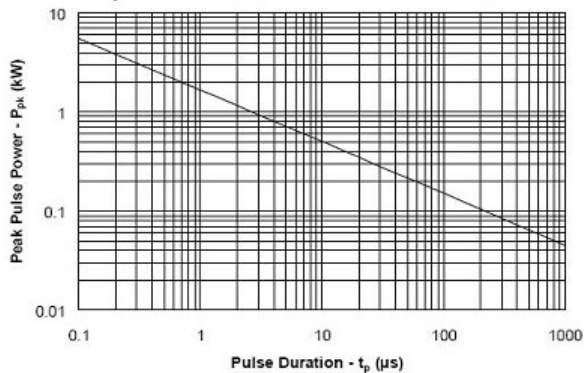

ESD Pulse Waveform (Per IEC 61000-4-2)

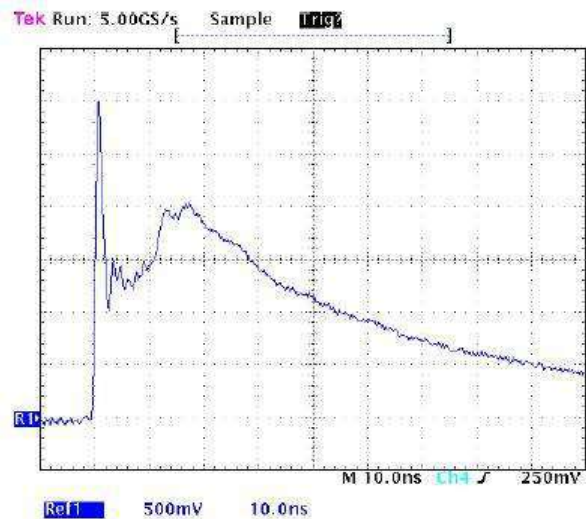

SOD-523 PACKAGE OUTLINE & DIMENSIONS

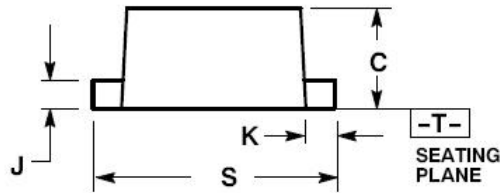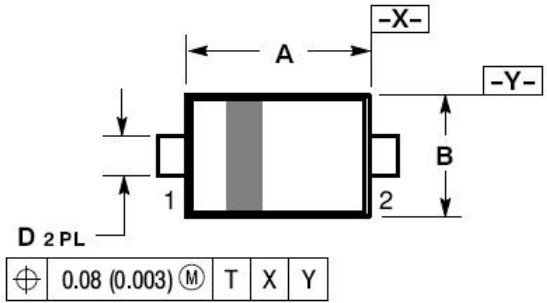

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.10	1.20	1.30	0.043	0.047	0.051
B	0.70	0.80	0.90	0.028	0.032	0.035
C	0.50	0.60	0.70	0.020	0.024	0.028
D	0.25	0.30	0.35	0.010	0.012	0.014
J	0.07	0.14	0.20	0.0028	0.0055	0.0079
K	0.15	0.20	0.25	0.006	0.008	0.010
S	1.50	1.60	1.70	0.059	0.063	0.067

* SOLDERING FOOTPRINT

